

Motor Protection Circuit Breaker (MPCB) J7MN

MPCB system (motor protection CLASS 10)

- Rotary and switch types
- Rated operational current = 12 A, 25 A, 50 A and 100 A
- Switching capacity up to 12.5 A = 100 kA/400 V
- Fixed short-circuit release = $13 \times I_u$
- Overload release adjustable $0.7 - 1 \times I_u$
- Single phasing sensitivity

Auxiliary contact modules

- ON/OFF indication for MPCB front mounting and side mounting
- Trip indication for MPCB side mounting



Accessories

- Undervoltage release
- Shunt release
- Three phase busbar system up to 5 MPCB
- Moulded plastic enclosures (IP55) rotary mechanism (black/grey and red/yellow)
- Moulded plastic front plates (IP55)
- Door coupling rotary mechanisms (black and red/yellow)

Insulated Link modules between Motor Contactor and MPCB for Fuseless Load Feeders

- Available as separate components
- For both 12 A or 25 A MPCB versions as one Type
- For mini motor contactors up to 5.5 kW
- For motor contactors up to 45 kW
- Up to 11 kW combined electrical and mechanical connection
- From 11 kW to 45 kW electrical connection only
- According to coordination 1

Approved Standards

Standard	Guide No (US,C)
UL	Permissible ratings of devices approved for North America see Appendix on CD-ROM
ICE 947-5-1	
VDE 0660	
EN 60947-5-1	

Ordering Information

■ Model Number Legend

1. Motor Protection Circuit Breaker (MPCB)

J7MN-□□-□□□

1 2 3

- 1) Motor Protection Circuit Breaker (MPCB)
- 2) Type
 - 12: Switch type (0.16 - 12 A)
 - 25: Rotary type (0.16 - 25 A)
 - 50: Rotary type (25 - 40 A)
 - 100: Rotary type (63 - 100 A)
- 3) Setting range (examples)
 - E16: 0.11 - 0.16 A
 - E2: 0.14 - 0.2 A
 - 16: 10 - 16 A
 - ...

2. Aux. Contacts for MPCB

J73MN-□□□

1 2 3

- 1) Aux. Contact for MPCB
- 2) 11: 1 NO 1 NC
- 3) S: side mounting
F: front mounting

J73MN-□□□□

1 2 3 4

- 1) Aux. Contact for MPCB
- 2) T: Trip indicating contact
- 3) 11: 1 NO 1 NC
- 4) S: side mounting

3. Accessories for MPCB

J74MN-□□□

1 2 3

- 1) Accessories for MPCB
- 2) S: Shunt release
U: Under voltage release
- 3) N1: 230 V 50 Hz / 240 V 60 Hz
N2: 210 - 240 V 50/60 Hz
N3: 110 V 50 Hz / 120 V 60 Hz
N4: 400 V 50/60 Hz

J74MN-□□□□□

1 2 3 4 5

- 1) Accessories for MPCB
- 2) PF: Enclosure IP55
P: Module plastic front plate
PH: Holder for front plate
- 3) 12: Switch type 105 mm
25: Rotary type 105 mm
- 4) S: small version 85 mm
- 5) RY: red/yellow handle

J74MN-□□□□

1 2 3

- 1) Accessories for MPCB
- 2) DC: Door coupling rotary mechanism
- 3) B: black / grey
RY: red / yellow

J74MN-□□□□

1 2 3

- 1) Accessories for MPCB
- 2) TB: Terminal block for UL/cUL type E
- 3) 25: for rotary type up to 25A
100: for rotary type up to 100A

4. Busbars

J75-CPM-□□□□□

1 2 3 4 5

- 1) Additional reference for LVSG
- 2) Busbar systems
- 3) Number of units (2, 3, 4 or 5)
- 4) Modular spacing
45 = without side mounting auxiliary contacts
54 = with side mounting auxiliary contacts
- 5) Nominal current per phase
6 = 64 A
12 = 120 A

5. Line Side Terminals

J75-BTC-□□□□

1 2 3 4

- 1) Additional reference for LVSG
- 2) Line side terminals
- 3) Nominal current per phase
25 = 64 A
50 = 120 A
- 4) Standards
IC = conformity to IEC 947-1 and UL 508
EC = conformity to UL 508E together with busbars
E = conformity to UL 508E without busbars

6. Shrouds

J75-TA-□□

1 2 3

- 1) Additional reference for LVSG
- 2) Shrouds
- 3) Size
63 = 64 A system
120 = 120 A system

7. Accessories for MPCB (For Fuse-less Load Feeders)

- a) Link modules for electrical and mechanical connection

J74MN-□□□□ 12-25

1 2

- 1) Additional reference for LVSG
- 2) VK1: electromechanical connector for mini contactor (4-5.5kW)
VK3: electromechanical connector for motor contactor (4-11kW)

- b) Link modules for electrical connection

J74MN-□□□□

1 2 3

- 1) Additional reference for LVSG
- 2) VD: link module J7MN + J7KN
- 3) 50: J7MN-50 + J7KN24-...40
100: J7MN-100 + J7KN50-...74

- c) DIN-rail adapters


J74MN-HU-□□

1 2 3

- 1) Additional reference for LVSG
- 2) HU: DIN-rail adapter
- 3) : for J7MN-12-25
50: for J7MN-50
100: for J7MN-100

■ System overview




Motor Protection Circuit Breaker (MPCB)

	Rated current	Suitable for motors*1 3~400V kW	Current setting range		Short-circuit breaking capacity at 3~400V kA	Type	Pack pcs.	Weight approx. kg/pcs.
	In A		Thermal overload release A	Instantaneous short-circuit release A				
Circuit-Breakers J7MN-12								
	0.16	-	0.11 – 0.16	2.1	100	J7MN-12-E16	1	0.21
	0.2	-	0.14 – 0.2	2.6	100	J7MN-12-E2	1	0.21
	0.25	0.06	0.18 – 0.25	3.3	100	J7MN-12-E25	1	0.21
	0.32	0.09	0.22 – 0.32	4.2	100	J7MN-12-E32	1	0.21
	0.4	-	0.28 – 0.4	5.2	100	J7MN-12-E4	1	0.21
	0.5	0.12	0.35 – 0.5	6.5	100	J7MN-12-E5	1	0.21
	0.63	0.18	0.45 – 0.63	8.2	100	J7MN-12-E63	1	0.21
	0.8	-	0.55 – 0.8	10	100	J7MN-12-E8	1	0.21
	1	0.25	0.7 – 1	13	100	J7MN-12-1	1	0.21
	1.25	0.37	0.9 – 1.25	16	100	J7MN-12-1E25	1	0.21
	1.6	0.55	1.1 – 1.6	21	100	J7MN-12-1E6	1	0.21
	2	0.75	1.4 – 2	26	100	J7MN-12-2	1	0.21
	2.5	-	1.8 – 2.5	33	100	J7MN-12-2E5	1	0.21
	3.2	1.1	2.2 – 3.2	42	100	J7MN-12-3E2	1	0.21
	4	1.5	2.8 – 4	52	100	J7MN-12-4	1	0.21
	5	-	3.5 – 5	65	100	J7MN-12-5	1	0.21
6.3	2.2	4.5 – 6.3	82	100	J7MN-12-6E3	1	0.21	
8	3	5.5 – 8	104	50	J7MN-12-8	1	0.21	
10	4	7 – 10	130	50	J7MN-12-10	1	0.21	
12	5.5	9 – 12	156	50	J7MN-12-12	1	0.21	

*1) Recommended values for standard motors

*2) max. motor current 95A







Low voltage switch gear

	Rated current	Suitable for motors*1 3~400V kW	Current setting range		Short-circuit breaking capacity at 3~400V kA	Type	Pack pcs.	Weight approx. kg/pcs.
	In A		Thermal overload release A	Instantaneous short-circuit release A				
Circuit-Breakers J7MN-25								
	0.16	-	0.11 – 0.16	2.1	100	J7MN-25-E16	1	0.32
	0.2	-	0.14 – 0.2	2.6	100	J7MN-25-E2	1	0.32
	0.25	0.06	0.18 – 0.25	3.3	100	J7MN-25-E25	1	0.32
	0.32	0.09	0.22 – 0.32	4.2	100	J7MN-25-E32	1	0.32
	0.4	-	0.28 – 0.4	5.2	100	J7MN-25-E4	1	0.32
	0.5	0.12	0.35 – 0.5	6.5	100	J7MN-25-E5	1	0.32
	0.63	0.18	0.45 – 0.63	8.2	100	J7MN-25-E63	1	0.32
	0.8	-	0.55 – 0.8	10	100	J7MN-25-E8	1	0.32
	1	0.25	0.7 – 1	13	100	J7MN-25-1	1	0.32
	1.25	0.37	0.9 – 1.25	16	100	J7MN-25-1E25	1	0.32
	1.6	0.55	1.1 – 1.6	21	100	J7MN-25-1E6	1	0.32
	2	0.75	1.4 – 2	26	100	J7MN-25-2	1	0.32
	2.5	-	1.8 – 2.5	33	100	J7MN-25-2E5	1	0.32
	3.2	1.1	2.2 – 3.2	42	100	J7MN-25-3E2	1	0.32
	4	1.5	2.8 – 4	52	100	J7MN-25-4	1	0.32
	5	-	3.5 – 5	65	100	J7MN-25-5	1	0.32
	6.3	2.2	4.5 – 6.3	82	100	J7MN-25-6E3	1	0.32
	8	3	5.5 – 8	104	100	J7MN-25-8	1	0.32
	10	4	7 – 10	130	100	J7MN-25-10	1	0.32
	12.5	5.5	9 – 12.5	163	100	J7MN-25-12E5	1	0.32
16	7.5	11 – 16	208	50	J7MN-25-16	1	0.32	
20	-	14 – 20	260	50	J7MN-25-20	1	0.32	
22	-	17 – 22	286	50	J7MN-25-22	1	0.32	
25	11	20 – 25	325	50	J7MN-25-25	1	0.32	
Circuit-Breakers J7MN-50								
	25	11	18 – 25	325	50	J7MN-50-25	1	0.96
	32	15	22 – 32	416	50	J7MN-50-32	1	0.96
	40	18.5	28 – 40	520	50	J7MN-50-40	1	0.96
	45	-	36 – 45	585	50	J7MN-50-45	1	0.96
	50	22	40 – 50	650	50	J7MN-50-50	1	0.96
Circuit-Breakers J7MN-100								
	63	30	45 – 63	819	50	J7MN-100-63	1	2.1
	75	37	57 – 75	975	50	J7MN-100-75	1	2.1
	90	-	70 – 90	1170	50	J7MN-100-90	1	2.1
	100	45	80 – 100*2	1235	50	J7MN-100-100	1	2.1




*1) Recommended values for standard motors

*2) max. motor current 95A



Accessories

	Description	Version	for circuit breaker	Type	Pack pcs.	Weight approx. kg/pcs.	
Transverse auxiliary contact block							
	Contact block	1NO + 1NC	all	J73MN-11F	10	0.02	
Auxiliary contact block for left hand side mounting (max 1pc. per circuit breaker)							
	Contact block	1NO + 1NC 9 mm	all	J73MN-11S	10	0.03	
Signalling switch for left hand side mounting (max 1pc. per circuit breaker)							
	Signalling switch	1NO + 1NC each Individual tripped and short-circuit signalling	J7MN-25 J7MN-50	J73MN-T-11S	1	0.07	
Auxiliary releases for right hand side mounting (max 1pc. per circuit breaker)							
	Undervoltage release Trips the circuit-breaker when the voltage is interrupted. Prevents the motor from being restarted accidentally when the voltage is restored, suitable for EMERGENCY STOP acc. to VDE 0113	AC 50 Hz 110 V 230 V 400 V	AC 60 Hz 120 V 240 V 400 V	all all all	J74MN-U-N3 J74MN-U-N1 J74MN-U-N4	1 1 1	0.12 0.12 0.12
	Shunt release Trips the circuit-breaker when the release coil energized.	50/60 Hz 100% ON 210-240 V	50/60 Hz, DC 5 sec ON 190-330 V	all	J74MN-S-N2	1	0.11
Terminal block							
	with increased creepage distances and clearances acc. to cULus Type „E“						
	Terminal block	up to 600 V acc. to UL 489 not for transverse aux. contact block	J7MN-25 J7MN-100	J74MN-TB25 J74MN-TB100	1 1	0.12 0.15	

Enclosures and Front Plates




	Description	Version	for circuit breaker	Type	Pack pcs.	Weight approx. kg/pcs.
Front Plates						
	Moulded plastic front plate with actuator diaphragm and holder for circuit breaker	for actuation of circuit-breakers in any enclosure protection degree IP55	J7MN-12	J74MN-P12	1	0.08
	Moulded plastic front plate with rotary operating mechanism lockable	for actuation of circuit-breakers in any enclosure protection degree IP55	J7MN-25 J7MN-50	J74MN-P25	1	0.08
	Holder for front plate J74MN-P25	Holder is mounted on front plate, circuit-breaker (with accessories) is snapped on	J7MN-25	J74MN-PH	1	0.12
Enclosures						
	Moulded plastic enclosure with actuator diaphragm knockouts for J7MN-12 sealable	protection degree IP55 with N- and PE- terminal 72 mm (+ aux. contact + release) 54 mm (+ lateral contact block)	J7MN-12	J74MN-PF12 J74MN-PF12S	1 1	0.27 0.23

Low voltage switch gear

	Description	Version	for circuit breaker	Type	Pack pcs.	Weight approx. kg/pcs.
	Moulded plastic enclosure with rotary operating mechanism knockouts for J7MN-25 lockable	protection degree IP55 with N- and PE- terminal 72 mm (+ aux. contact + release)	J7MN-25	J74MN-PF25 J74MN-PF25RY ^{*1}	1	0.30
		54 mm (+ lateral contact block)		J74MN-PF25S J74MN-PF25SRY ^{*1}	1	0.26
Door-coupling mechanisms						
	The door-coupling rotary operating mechanisms consist of a knob, a coupling driver and a extension shaft (5 mm x 5 mm). The door-coupling rotary operating mechanisms are designed for degree of protection IP 65. The door locking device prevents accidental opening of the cubicle door in the ON position of the circuit-breaker. The OFF position can be locked with up to 3 padlocks.					
	Door-coupling rotary mechanism black	extension shaft 330 mm with supporting bracket	J7MN-25 to J7MN-50	J74MN-DC-B	1	0.3
	Emergency-Stop Door-coupling rotary	extension shaft 330 mm with supporting bracket	J7MN-25 to J7MN-50	J74MN-DC-RY ^{*1}	1	0.3

*1 RY = mechanism red/yellow




Insulated 3-Phase Busbar System

	Description	Version	For Units (contactors or MPCB)	Type	Pack pcs
	3-phase busbars modular spacing = 45 mm In = 64 A ^{*1}	for 2 units	J7KN 10-...40	J75-CPM-2-45-6	1
		for 3 units	J7MN 12	J75-CPM-3-45-6	1
		for 4 units	J7MN 25	J75-CPM-4-45-6	1
		for 5 units ^{*2}		J75-CPM-5-45-6	1
	3-phase busbars modular spacing = 54 mm In = 64 A ^{*1}	for 2 units	J7KN 24-...40 + J73 KN□□	J75-CPM-2-54-6	1
		for 3 units	J7MN 12 + J73 MN□□	J75-CPM-3-54-6	1
		for 4 units	J7MN 25 + J73 MN□□	J75-CPM-4-54-6	1
		for 5 units ^{*2}		J75-CPM-5-54-6	1
	3-phase busbars modular spacing = 54 mm In = 120 A ^{*1}	for 2 units	J7KN 50	J75-CPM-2-54-12	1
		for 3 units	J7MN 50	J75-CPM-3-54-12	1
				J75-CPM-4-54-12	1
	3-phase busbars modular spacing = 54 mm In = 120 A ^{*1}	for 2 units	J7KN 50 + J73 KN□□	J75-CPM-2-63-12	1
for 3 units		J7MN 50 + J73 MN□□	J75-CPM-3-63-12	1	
for 4 units ^{*2}			J75-CPM-4-63-12	1	
	Shrouds for unused terminals on the busbar system	for 64 A version for 120 A version		J75-TA-63 J75-TA-120	10
	Line side terminals to be used with busbar systems J75-CPM-...6 In = 64 A ^{*1}	IEC 60947 EN 60947 according to UL 508		J75-BTC-25-IC	1
		IEC 60947 EN 60947 according to UL 508E		J75-BTC-25-EC	1
	Line side terminals to be used with busbar systems J75-CPM-...12			J75-BTC-50-E	1

*1 The sum of all added currents per module must not exceed the above mentioned nominal currents!




*2 For more than 5 units (64 A) and 4 units (120 A) the system can be extended accordingly by installing an additional busbar

Mounting Parts for Fuseless Load Feeders (see page I-72)

	Description	Version	for circuit breaker	Type	Pack pcs.	Weight approx. kg/pcs.
DIN-rail adapters						
	Adapter for mechanical fixing of circuit-breaker and contactor	35 mm-DIN-rail (DIN EN50022) or screw mounting	J7MN-12-...25	J74MN-HU	1	0.05
			J7MN-50	J74MN-HU-50	1	0.20
			J7MN-100	J74MN-HU-100	1	0.25
Link modules						
	for electrical and mechanical connection between circuit-breaker and contactor					
	Link module	J7KNA 09 - J7KNA 12 J7KN 10 - J7KN 22	J7MN 12-25 J7MN 12-25	J74MN-VK1 12-25 J74MN-VK3 12-25	1 1	0.015 0.02
	for electrical connection between circuit-breaker and contactor					
	Link module	J7KN-24 - J7KN-40 J7KN-50 - J7KN-74	J7MN-50 J7MN-100	J74MN-VD-50 J74MN-VD-100	10 10	- -

■ Components for Fuseless Load Feeders, DIN-rail Mounting

Type of coordination „1“ 3 x 415 V 10 kA (other conditions on request)

	Motor 3~400V kW	Setting range A	MPCB	Contactor	Link	DIN-rail
			Type	220-230V 50Hz ¹ Type	module Type	adapter Type
			<i>page I-68</i>	<i>page I-13</i>	<i>page I-13</i>	
	–	0.11 – 0.16	J7MN-25-E16	J7KNA-09-10-230	J74MN-VK1 12-25	–
	–	0.14 – 0.20	J7MN-25-E2	J7KNA-09-10-230	J74MN-VK1 12-25	–
	0.06	0.18 – 0.25	J7MN-25-E25	J7KNA-09-10-230	J74MN-VK1 12-25	–
	0.09	0.22 – 0.32	J7MN-25-E32	J7KNA-09-10-230	J74MN-VK1 12-25	–
	–	0.28 – 0.40	J7MN-25-E4	J7KNA-09-10-230	J74MN-VK1 12-25	–
	0.12	0.35 – 0.50	J7MN-25-E5	J7KNA-09-10-230	J74MN-VK1 12-25	–
	0.18	0.45 – 0.63	J7MN-25-E63	J7KNA-09-10-230	J74MN-VK1 12-25	–
	–	0.55 – 0.80	J7MN-25-E8	J7KNA-09-10-230	J74MN-VK1 12-25	–
	0.25	0.70 – 1.00	J7MN-25-1	J7KNA-09-10-230	J74MN-VK1 12-25	–
	0.37	0.90 – 1.25	J7MN-25-1E25	J7KNA-09-10-230	J74MN-VK1 12-25	–
	0.55	1.10 – 1.60	J7MN-25-1E6	J7KNA-09-10-230	J74MN-VK1 12-25	–
	0.75	1.40 – 2.00	J7MN-25-2	J7KNA-09-10-230	J74MN-VK1 12-25	–
	–	1.80 – 2.50	J7MN-25-2E5	J7KNA-09-10-230	J74MN-VK1 12-25	–
	1.10	2.20 – 3.20	J7MN-25-3E2	J7KNA-09-10-230	J74MN-VK1 12-25	–
	1.50	2.80 – 4.00	J7MN-25-4	J7KNA-09-10-230	J74MN-VK1 12-25	–
	–	3.50 – 5.00	J7MN-25-5	J7KNA-09-10-230	J74MN-VK1 12-25	–
	2.20	4.50 – 6.30	J7MN-25-6E3	J7KNA-09-10-230	J74MN-VK1 12-25	–
3.00	5.50 – 8.00	J7MN-25-8	J7KNA-09-10-230	J74MN-VK1 12-25	–	
4.00	7.00 – 10.00	J7MN-25-10	J7KNA-09-10-230	J74MN-VK1 12-25	–	
5.50	9.00 – 12.50	J7MN-25-12E5	J7KNA-12-10-230	J74MN-VK1 12-25	–	
			<i>page I-68</i>	<i>page I-30</i>		
	–	0.11 – 0.16	J7MN-25-E16	J7KN-10-10-230-VK3	–	–
	–	0.14 – 0.20	J7MN-25-E2	J7KN-10-10-230-VK3	–	–
	0.06	0.18 – 0.25	J7MN-25-E25	J7KN-10-10-230-VK3	–	–
	0.09	0.22 – 0.32	J7MN-25-E32	J7KN-10-10-230-VK3	–	–
	–	0.28 – 0.40	J7MN-25-E4	J7KN-10-10-230-VK3	–	–
	0.12	0.35 – 0.50	J7MN-25-E5	J7KN-10-10-230-VK3	–	–
	0.18	0.45 – 0.63	J7MN-25-E63	J7KN-10-10-230-VK3	–	–
	–	0.55 – 0.80	J7MN-25-E8	J7KN-10-10-230-VK3	–	–
	0.25	0.70 – 1.00	J7MN-25-1	J7KN-10-10-230-VK3	–	–
	0.37	0.90 – 1.25	J7MN-25-1E25	J7KN-10-10-230-VK3	–	–
	0.55	1.10 – 1.60	J7MN-25-1E6	J7KN-10-10-230-VK3	–	–
	0.75	1.40 – 2.00	J7MN-25-2	J7KN-10-10-230-VK3	–	–
	–	1.80 – 2.50	J7MN-25-2E5	J7KN-10-10-230-VK3	–	–
	1.10	2.20 – 3.20	J7MN-25-3E2	J7KN-10-10-230-VK3	–	–
	1.50	2.80 – 4.00	J7MN-25-4	J7KN-10-10-230-VK3	–	–
	–	3.50 – 5.00	J7MN-25-5	J7KN-10-10-230-VK3	–	–
	2.20	4.50 – 6.30	J7MN-25-6E3	J7KN-10-10-230-VK3	–	–
3.00	5.50 – 8.00	J7MN-25-8	J7KN-10-10-230-VK3	–	–	
4.00	7.00 – 10.00	J7MN-25-10	J7KN-10-10-230-VK3	–	–	
6.00	9.00 – 12.50	J7MN-25-12E5	J7KN-14-10-230-VK3	–	–	
8.00	11.00 – 16.00	J7MN-25-16	J7KN-18-10-230-VK3	–	–	
–	14.00 – 20.00	J7MN-25-20	J7KN-22-10-230-VK3	–	–	
–	17.00 – 22.00	J7MN-25-22	J7KN-22-10-230-VK3	–	–	
11.00	20.00 – 25.00	J7MN-25-25	J7KN-22-10-230-VK3	–	–	
			<i>page I-68</i>	<i>page I-30</i>	<i>page I-71</i>	<i>page I-71</i>
	11.00	18.00 – 25.00	J7MN-50-25	J7KN-24-230	J74MN-VD-50	J74MN-HU-50
	15.00	22.00 – 32.00	J7MN-50-32	J7KN-32-230	J74MN-VD-50	J74MN-HU-50
	19.00	28.00 – 40.00	J7MN-50-40	J7KN-40-230	J74MN-VD-50	J74MN-HU-50
	–	36.00 – 45.00	J7MN-50-45	J7KN-50-230	J74MN-VD-100	J74MN-HU-100
	22.00	40.00 – 50.00	J7MN-50-50	J7KN-50-230	J74MN-VD-100	J74MN-HU-100
	30.00	45.00 – 63.00	J7MN-100-63	J7KN-62-230	J74MN-VD-100	J74MN-HU-100
	37.00	57.00 – 75.00	J7MN-100-75	J7KN-74-230	J74MN-VD-100	J74MN-HU-100
	–	70.00 – 90.00	J7MN-100-90	J7KN-85-22-230	–	–
45.00	80.00 – 100.00	J7MN-100-100	J7KN-110-22-230	–	–	

¹ other voltages, see *page I-36*

Specifications

Engineering data and Characteristics

Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660

This table shows the rated ultimate short-circuit breaking capacity I_{cu} and the rated service short-circuit breaking capacity I_{cs} of the J7MN circuit-breakers with different operational voltages as a function of the rated current I_n of the circuit-breakers.

The circuit-breakers can be fed at the top or bottom supply terminals without any reduction of the rated data.

If the short-circuit current exceeds the rated short-circuit breaking capacity of the circuit-breaker specified in the tables at the installation point, a back-up fuse is to be used.

The maximum rated current for the back-up fuse is specified in the tables. These fuses are only suitable for the short-circuit-currents as indicated on the fuses.

Circuit-breaker Type	Rated current I_n A	up to AC 240V ¹⁾			up to AC 400V ¹⁾ up to AC 415V ²⁾			up to AC 440V ¹⁾ up to AC 460V ²⁾			up to AC 500V ¹⁾ up to AC 525V ²⁾			up to AC 690V ¹⁾		
		I_{cu} kA	I_{cs} kA	max. fuse (gL/gG) A	I_{cu} kA	I_{cs} kA	max. fuse (gL/gG) A	I_{cu} kA	I_{cs} kA	max. fuse (gL/gG) A	I_{cu} kA	I_{cs} kA	max. fuse (gL/gG) A	I_{cu} kA	I_{cs} kA	max. fuse (gL/gG) A
J7MN-12	0.16 to 0.8	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	1	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	1.25	100	100	--	100	100	--	100	100	--	100	100	--	2	2	20
	1.6	100	100	--	100	100	--	100	100	--	100	100	--	2	2	20
	2	100	100	--	100	100	--	100	100	--	10	10	35	2	2	35
	2.5	100	100	--	100	100	--	100	100	--	10	10	35	2	2	35
	3.2	100	100	--	100	100	--	10	10	40	3	3	40	2	2	40
	4	100	100	--	100	100	--	10	10	40	3	3	40	2	2	40
	5	100	100	--	100	100	--	10	10	50	3	3	50	2	2	50
	6.3	100	100	--	100	100	--	10	10	50	3	3	50	2	2	50
	8	100	100	--	50	12.5	80 ³⁾	10	10	63	3	3	63	2	2	63
	10	100	100	--	50	12.5	80 ³⁾	10	10	63	3	3	63	2	2	63
12	100	100	--	50	12.5	80 ³⁾	10	10	80	3	3	80	2	2	80	
J7MN-25	0.16 to 1.25	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	1.6	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	2	100	100	--	100	100	--	100	100	--	100	100	--	8	8	25
	2.5	100	100	--	100	100	--	100	100	--	100	100	--	8	8	25
	3.2	100	100	--	100	100	--	100	100	--	100	100	--	8	8	32
	4	100	100	--	100	100	--	100	100	--	100	100	--	6	3	32
	5	100	100	--	100	100	--	100	100	--	100	100	--	6	3	32
	6.3	100	100	--	100	100	--	100	100	--	100	100	--	6	3	50
	8	100	100	--	100	100	--	50	25	63 ³⁾	42	21	63	6	3	50
	10	100	100	--	100	100	--	50	25	80 ³⁾	42	21	63	6	3	50
	12.5	100	100	--	100	100	--	50	25	80 ³⁾	42	21	80	6	3	63
	16	100	100	--	50	25	100 ³⁾	20	10	80	10	5	80	4	2	63
	20	100	100	--	50	25	125 ³⁾	20	10	80	10	5	80	4	2	63
	22	100	100	--	50	25	125 ³⁾	20	10	100	10	5	80	4	2	63
	25	100	100	--	50	25	125 ³⁾	20	10	100	10	5	80	4	2	63
J7MN-50	25	100	100	--	50	25	125 ³⁾	30	15	100	12	6	80	5	3	63
	32	100	100	--	50	25	125 ³⁾	30	15	125	10	5	100	4	2	63
	40	100	100	--	50	25	160 ³⁾	30	15	125	10	5	100	4	2	63
	45	100	100	--	50	25	160 ³⁾	30	15	125	10	5	100	4	2	63
	50	100	100	--	50	25	160 ³⁾	30	15	125	10	5	100	4	2	80
J7MN-100	63	100	100	--	50	25	160 ³⁾	40	20	160	12	6	125	6	3	80
	75	100	100	--	50	25	160 ³⁾	40	20	160	8	4	125	5	3	100
	90	100	100	--	50	25	160 ³⁾	40	20	160	8	4	125	5	3	125
	100	100	100	--	50	25	160 ³⁾	40	20	160	8	4	125	5	3	125

¹⁾ 10% overvoltage

²⁾ 5% overvoltage

³⁾ Back-up fuse required if short-circuit current at installation point > 50 kA

-- No back-up fuse required.

Low voltage switch gear

Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660

Main Circuit

Type		J7MN-12	J7MN-25	J7MN-50	J7MN-100	
Number of poles		3	3	3	3	
Max. rated current Inmax (=max. rated operational current Ie)	A	12	25	50	100	
Permissible ambient temperature						
Storage/transport	°C	-50 to +80				
Operation	°C	-20 to +70 ¹				
Permissible rated current at temperature inside cubicle of:	+60 °C	%	100			
	+70 °C	%	87			
Circuit-breaker inside enclosure						
Permissible rated current at temperature inside enclosure of:	+60 °C	%	100			
	+70 °C	%	87			
Rated operational voltage Ue	V	690 ²				
Rated frequency	Hz	50/60				
Rated insulation voltage Ui	V	690				
Rated impulse withstand voltage Uimp	kV	6				
Utilization category						
IEC 60 947-2 (circuit-breaker)		A				
IEC 60 947-4-1 (motor starter)		AC-3				
Class	acc. to IEC 60 947-4-1	10				
DC short-circuit breaking capacity (time constant t = 5 ms)						
1 conducting path DC 150 V	kA	10				
2 conducting paths in series DC 300 V	kA	10				
3 conducting paths in series DC 450 V	kA	10				
Power loss Pv per circuit-breaker dependent on rated current In (upper setting range)	In -> to 1.25 A	W	5	-	-	-
	In -> 1.6 to 6.3 A	W	6	-	-	-
	In -> 8 to 12 A	W	7	-	-	-
R per conducting path = P/(I ² × 3)	In -> 1 to 6.3 A	W	-	6	-	-
	In -> 8 to 16 A	W	-	7	-	-
	In -> 20 to 25 A	W	-	8	-	-
	In -> to 25 A	W	-	-	12	-
	In -> 32 A	W	-	-	15	-
	In -> 40 to 50 A	W	-	-	20	-
	In -> to 63 A	W	-	-	-	20
	In -> 75 to 90 A	W	-	-	-	30
	In -> to 100 A	W	-	-	-	38
	Shock resistance	acc. to IEC 68 Part 2-27	g	25	25	25
Degree of protection	acc. to IEC 60 529		IP 20	IP 20	IP 20 ³	IP 20 ³
Shock hazard protection	acc. to DIN VDE 0106 Part 100	safe against finger touch				
Temperature compensation	acc. to IEC 60 947-4-1	°C	-20 to +60			
Phase failure sensitivity	acc. to IEC 60 947-4-1		yes			
Explosion protection	acc. to EC Directive 94191 EC		yes ⁴			
Isolator characteristics	acc. to IEC 60 947-3		yes			
Main and EM. STOP switch characteristics	acc. to IEC 60 204-1 (VDE 0113)		yes ⁵			
Safe isolation between main and auxiliary circuits	acc. to DIN VDE 0106 Part 101		yes			
	up to 400 V + 10 % up to 415 V + 5 %		yes			
Mechanical endurance	operating cycles		100 000	100 000	50 000	50 000
Electrical endurance			100 000	100 000	25 000	25 000
Max. operating frequency per hour (motor starts)	1/h		15	15	15	15
Permissible mounting position		any. acc. to IEC 60 447 start command "I" right-hand side or top				

¹ Over +60°C current reduction
² 500 V with moulded-plastic enclosure
³ Terminal compartment IP00
⁴ KEMA-test certification on request
⁵ With appropriate accessories

Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660

Conductor cross-sections for main Circuit

Type		J7MN-12	J7MN-25	J7MN-50	J7MN-100
Terminal type		Screw-type	Screw-type	Box terminal	Box terminal
Terminal screw		Pozidriv size 2	Pozidriv size 2	Pozidriv size 2	Allen screw 4 mm
Tightening torque	Nm	0.8 to 1.2	2 to 2.5	3 to 4.5	4 to 6
Conductor cross-sections					
solid	mm ²	2 x (0.5 to 1.5)	2 x (1 to 2.5)	2 x (0.75 to 16)	2 x (2.5 to 16)
	mm ²	2 x (0.75 to 2.5)	2 x (2.5 to 6)	–	–
	mm ²	1 x (0.5 to 4)	–	–	–
finely stranded with end ferrule	mm ²	2 x (0.5 to 1.5)	2 x (1 to 2.5)	2 x (0.75 to 16)	2 x (2.5 to 35)
	mm ²	2 x (0.75 to 2.5)	2 x (2.5 to 6)	1 x (0.75 to 25)	1 x (2.5 to 50)
	mm ²	–	1 x (1 to 10)	–	–
stranded	mm ²	2 x (0.5 to 1.5)	2 x (1 to 2.5)	2 x (0.75 to 25)	2 x (10 to 50)
	mm ²	2 x (0.75 to 2.5)	2 x (2.5 to 6)	1 x (0.75 to 35)	1 x (10 to 70)
	mm ²	1 x (0.5 to 4)	1 x (1 to 10)	–	–
AWG-wires, solid or stranded	AWG	2 x (18 to 14)	2 x (14 to 10)	2 x (18 to 3)	2 x (10 to 1/0)
	AWG	–	–	1 x (18 to 2)	1 x (10 to 2/0)
conductor bar (number x width x thick)	mm	–	–	2 x (6 x 9 x 0.8)	2 x (6 x 9 x 0.8)
	mm	–	–	–	18 x 10
	mm ²	–	–	–	up to 2 x 70

Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660

Auxiliary switches

Switching capacity				Control voltage			
Front transverse auxiliary switch with 1 NO + 1 NC							
Rated operational voltage U _e	AC	V	24	230			
Rated operational current I _e /AC-15		A	2	0.5			
Rated operational current I _e /AC-12 I _{th}		A	2.5	2.5			
Rated operational voltage U _e	DC L/R 200 ms	V	24	48	60		
Rated operational current I _e /DC-13		A	1	0.3	0.15		
Lateral auxiliary switch and signalling switch							
Rated operational voltage U _e	AC	V	24	230	400	690	
Rated operational current I _e /AC-15		A	6	6	3	1	
Rated operational current I _e /AC-12 I _{th}		A	10	10	10	10	
Rated operational voltage U _e	DC L/R 200 ms	V	24	110	220	440	
Rated operational current I _e /DC-13		A	2	0.5	0.25	0.1	
Undervoltage release		Power consumption during pick-up	VA/W	20.2/13			
		uninterrupted duty	VA/W	7.2/2.4			
	Response voltage	trip	V	0.7 to 0.35 × U _s			
		pick-up	V	0.85 to 1.1 × U _s			
	Max. opening time		ms	20			
Shunt release		Power consumption during pick-up	AC VA/W	20.2/13			
			DC W	13 to 80			
	Response voltage acc. to IEC 60 947-1, trip		V	0.7 to 1.1 × U _s			
	Max. opening time		ms	20			
Short-circuit protection for auxiliary and control circuits							
	Fuse	gL/gG	A	10			
	Miniature circuit breaker C-characteristic		A	6 ^{*1}			
Conductor cross-sections for auxiliary and control circuits				Screw-type Pozidriv size 2			
	solid		mm ²	2 x (0.5 to 1.5) / 2 x (0.75 to 2.5)			
	finely stranded with ferrule		mm ²	2 x (0.5 to 1.5) / 2 x (0.75 to 2.5)			
	stranded		mm ²	2 x (0.5 to 1.5) / 2 x (0.75 to 2.5)			
	AWG-wires, solid or stranded		AWG	2 x (18 to 14)			

*1 Prospective short-circuit current < 0.4 kA.

Low voltage switch gear

Description

J7MN circuit-breakers are compact, current-limiting circuit-breakers which are optimised for load feeders. The circuit-breakers are used for switching and protecting three-phase induction motors of up to 18,5 kW at AC 400 V and for loads with rated currents of up to 40 A.

Construction

The circuit-breakers are available in three sizes:

J7MN-12 overall width 45 mm. Max. rated current 12 A. Suitable for 3-phase induction motors of up to 5.5 kW at voltages of 400 V AC.

J7MN-25 overall width 45 mm. Max. rated current 25 A. Suitable for 3-phase induction motors of up to 11 kW at voltages of 400 V AC.

J7MN-50 overall width 55 mm. Max. rated current 40 A. Suitable for 3-phase induction motors of up to 18,5 kW at voltages of 400 V AC.

J7MN-100 overall width 70 mm. Max. rated current 100 A. Suitable for 3-phase induction motors of up to 45 kW at voltages of 400 V AC.

Releases

Circuit-breakers J7MN are equipped with bimetallic-based, inverse-time delayed overload releases and with instantaneous overcurrent releases (electromagnetic short-circuit releases).

The overload releases can be set in accordance with the load current. The overcurrent releases are permanently set to a value 13 times the rated current and thus enable trouble-free start-up of motors.

The scale cover can be sealed to prevent unauthorized adjustments to the set current.

Operating mechanisms

Circuit-breakers J7MN-12 are actuated via a switch operating mechanism and circuit-breakers J7MN-25, J7MN-50 and J7MN-100 via a rotary operating mechanism. If the circuit-breaker trips, the rotary operating mechanism switches to the tripped position to indicate this. Before the circuit-breaker is reclosed, the rotary operating mechanism must be reset to the 0 position by hand, in order to prevent the former from closing by mistake before the fault has been cleared.

In the case of circuit-breakers with rotary operating mechanisms, there is an electrical signal via a signalling switch to indicate that the circuit-breaker has tripped.

All operating mechanisms can be locked in the 0 position with a padlock (shackle diameter 3.5 to 4.5 mm).

The J7MN circuit-breakers fulfil the isolation characteristics specified in IEC 60 947-2.

Operating conditions

Circuit-breakers J7MN are suitable for use in any climate. They are designed for operation in enclosed rooms under normal conditions (e. g. no dust, corrosive vapours or harmful gases). Suitable enclosures must be provided for installation in dusty or damp rooms.

Circuit-breakers J7MN can also be fed from below. The standards in accordance with which the circuit-breakers are constructed, the permissible ambient temperatures, the maximum making and breaking capacities, the tripping currents and other boundary conditions can be found in the technical data and tripping characteristics.

Since the operational currents, starting currents and current peaks vary as a result of the inrush current, even in the case of motors with identical output ratings, the values specified for these output ratings in the selection tables are intended as a guide only. The specific rated and start-up data of the motor to be protected is always paramount to the choice of the most suitable circuit-breaker.

In order to prevent premature tripping due to phase failure sensitivity, the circuit-breakers should always be connected in such a way that current flows through all three main conducting paths.

Short-circuit protection

The short-circuit releases of J7MN circuit-breakers disconnect the faulty load feeder from the system in the event of a short circuit and thus prevent any further damage.

Circuit-breakers with a short-circuit breaking capacity of 50 kA or 100 kA at a voltage of 400 V AC are practically short-circuit-proof at this voltage, as higher short-circuit currents are not usually encountered at the installation point.

Back-up fuses are only necessary if the short-circuit current at the installation point exceeds the rated ultimate short-circuit breaking capacity of the circuit-breakers.

Motor protection

The tripping characteristics of J7MN circuit-breakers are designed mainly to protect three-phase induction motors. The circuit-breakers are therefore also referred to as motor circuit-breakers. The current of the motor to be protected is set with the aid of the scale.

Circuit-breakers with thermal overload releases are normally designed in accordance with release Class 10.

Line protection

J7MN circuit-breakers for motor protection are also suitable for line protection. In order to prevent premature tripping due to phase failure sensitivity, the three conducting paths must always be uniformly loaded. The conducting paths must be connected in series in the case of single-phase loads.

The J7MN circuit-breakers meet the isolation conditions of IEC 60 947-3 as well as the additional test conditions for circuit-breakers with isolation characteristics specified in IEC 60 947-2. Taking IEC 60 204-1 into consideration, they can thus be implemented as main and EMERGENCY STOP switches.

Door-coupling rotary operating mechanism do not fulfil the isolation characteristics specified in IEC 60 947-2. Door-coupling rotary operating mechanism according isolation characteristics specified in IEC 60 947-2 on request.

Characteristics

The time/current characteristic, the current limiting characteristics and the I^2t characteristics were determined in accordance with DIN VDE 0660 and IEC 60 947.

The tripping characteristic of the inverse-time delayed overload releases (thermal overload releases or 'a' releases) for DC and AC with a frequency of 0 to 400 Hz also apply to the time/current characteristic.

The characteristics apply to the cold state. At operating temperature, the tripping times of the thermal releases are reduced to approximately 25 %.

Under normal operating conditions, all three poles of the device must be loaded. The three main conducting paths must be connected in series in order to protect single-phase or DC loads.


With 3-pole loading, the maximum deviation in the tripping time for 3 times the setting current and upwards is $\pm 20\%$ and thus in accordance with DIN VDE 0165.

The tripping characteristics for the instantaneous, electromagnetic overcurrent releases (short-circuit releases or 'n' releases) are based on the rated current I_n , which is also the maximum value of the setting range for circuit-breakers with adjustable overload releases. If the current is set to a lower value, the tripping current of the 'n' release is increased by a corresponding factor.

The characteristics of the electromagnetic overcurrent releases apply to frequencies of 50/60 Hz. Appropriate correction factors must be used for lower frequencies up to $16\frac{2}{3}$ Hz, for higher frequencies up to 400 Hz and for DC.

The characteristic shown here is a schematic representation of circuit-breakers for all ranges.

Time/current characteristics, current limiting characteristics and I^2t characteristics are available on request.

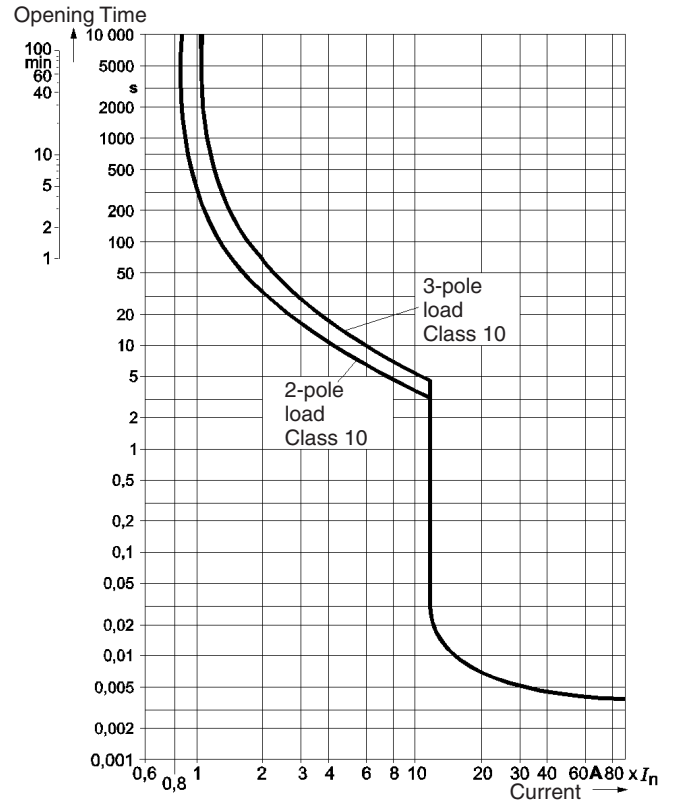


Wiring diagrams

<p>Circuit-breaker J7MN</p>	<p>Transverse auxiliary contact block J73MN-11F</p>	<p>Lateral auxiliary contact block J73MN-11S</p>
<p>Signalling switch J73MN-T-11S</p>	<p>Undervoltage release J74MN-U</p>	<p>Shunt release J74MN-S</p>


Low voltage switch gear

■ Dimensions


Circuit-breaker J7MN-12

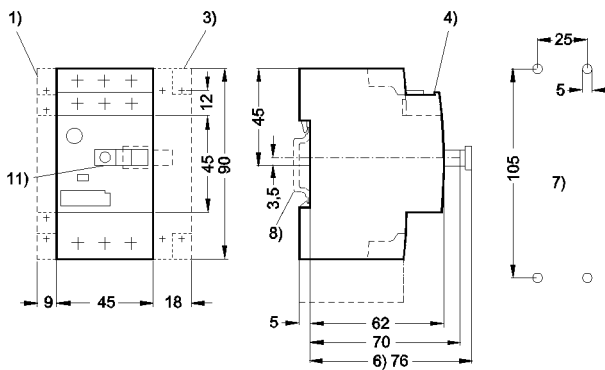

Circuit-breaker J7MN-25

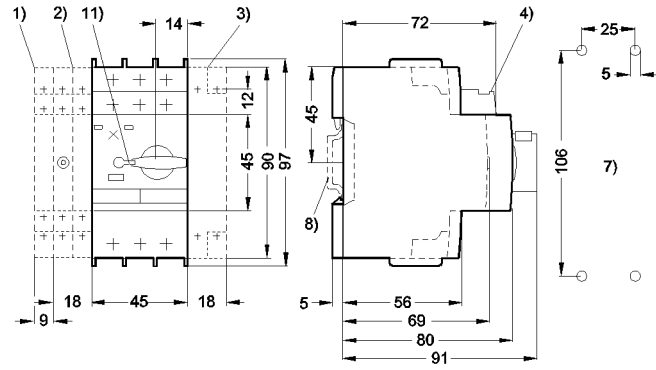


Circuit-breaker J7MN-50

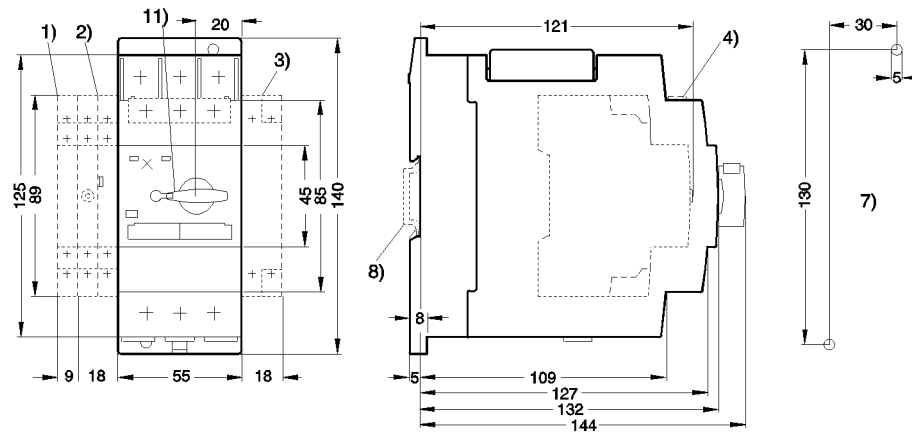


- 1) Lateral aux. contact
- 2) Signalling contact
- 3) Auxiliary release
- 4) Transverse aux. contact
- 7) Mounting holes
- 8) 35mm DIN-rail
- 9) 35mm DIN-rail 15mm high or 75mm DIN-rail
- 10) 4mm hexagon socket screw
- 11) Lockable in 0-position with shackle diameter max.5mm

Circuit-breaker J7MN-100

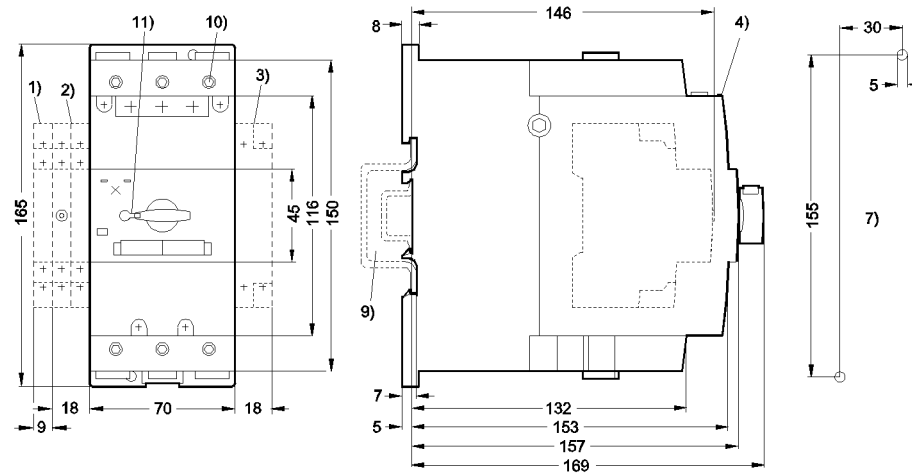


- 1) Lateral aux. contact
- 2) Signalling contact
- 3) Auxiliary release
- 4) Transverse aux. contact
- 7) Mounting holes
- 8) 35mm DIN-rail
- 9) 35mm DIN-rail 15mm high or 75mm DIN-rail
- 10) 4mm hexagon socket screw
- 11) Lockable in 0-position with shackle diameter max.5mm


Moulded plastic front plate J74MN-P12

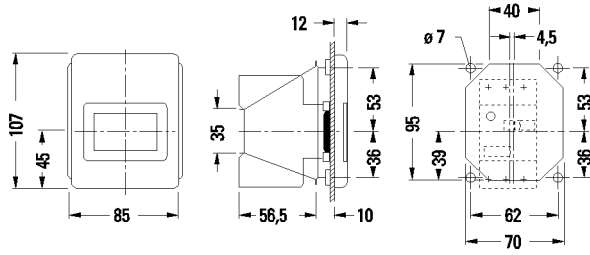

Moulded plastic front plate J74MN-P25

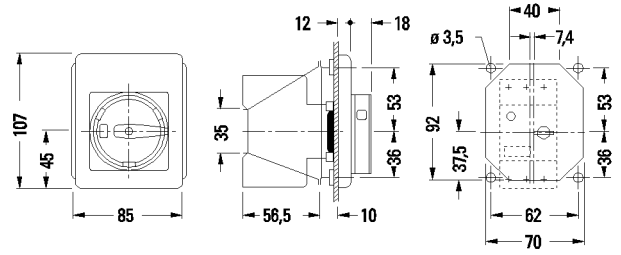


Moulded plastic enclosure J74MN-PF12(S)

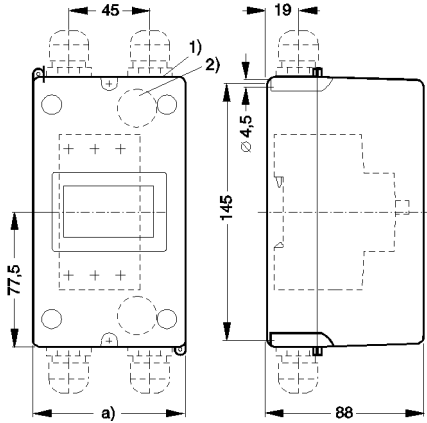


Dim. a
J74MN-PF12 105 mm
J74MN-PF12S 85 mm

Moulded plastic enclosure J74MN-PF25(S)(RY)

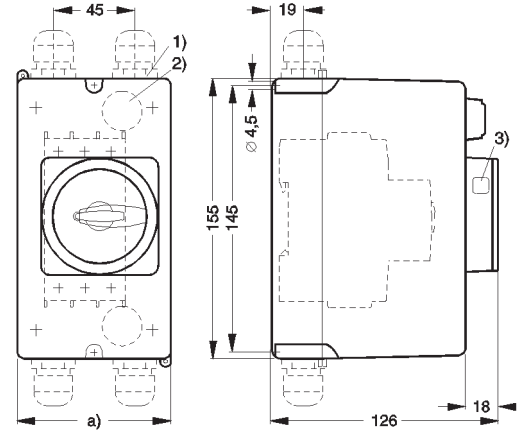

Dim. a
J74MN-PF25 105 mm
J74MN-PF25S 85 mm

Door-coupling rotary operating mechanism J74MN-DC

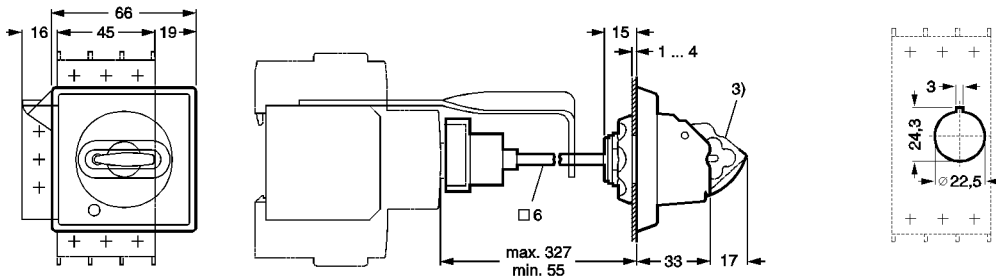

1) Max. for shackle diameter for padlock 8 mm

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.