










Selection Guide – Signal Relays

Model		G5V-1	G6E
Features		Slim single in-line miniature relay	Sub-miniature, sensitive relay
		ROHS compliant	ROHS compliant
Appearance			
Dimensions (LxWxH)		12.5 x 7.5 x 10	16 x 10 x 8
Contact Ratings	Contact Form	SPDT	SPDT
	Contact Type	Single Crossbar	Bifurcated Crossbar
	Contact Material	Ag (Au-clad)	Ag (Au-clad)
	Resistive Load	0.5 A at 125 VAC 1 A at 24 VDC	0.4 A at 125 VAC 12 A at 30 VDC
	Max. Switching Current	1 A	3 A
	Min. Permissible load	1 mA at 5 VDC	10 µA at 10 mVDC
	Max. Switching Power	125 VA, 90 W	50 VA, 60 W
	Max. Switching Voltage	125 VAC, 60 VDC	250 VAC, 220 VDC
Coil ratings	Rated Voltage	3 to 24 VDC	3 to 48 VDC
	Power Consumption (Approx.)	150 mW	200 to 400 mW
Endurance	Electrical (operations)	100,000 min	100,000 min
	Mechanical (operations)	5,000,000 min	100,000,000 min
Dielectric strength	Between coil and contacts	1,000 VAC	1,500 VAC
	Between contacts of different polarity	—	—
	Between contacts of same polarity	400 VAC	1,000 VAC
Ambient temperature (operating)		–40°C to 70°C	–40°C to 70°C
Variations	Single Side Stable	•	•
	Single Winding Latching		•
	Double Winding Latching		•
	Through Hole	•	•
	Surface Mount		
	Fully Sealed	•	•
Approved Standards		UL, CSA	UL, CSA
Packaging	Min. Pack Quantity	25 (Tube)	25 (Tube)
	Min. Order Quantity	500	500
Page		170	173




Selection Guide – Signal Relays

Model		G6L		G6H	
Features		Ultra-thin flat relay		Ultra-small relay with 5mm height	
		ROHS compliant		ROHS compliant	
Appearance		G6L-1P	G6L-1F	G6H-2F	G6H-2
Dimensions (LxWxH)		 10.6 x 7 x 4.1	 10.6 x 7 x 4.5	 14.3 x 9.3 x 5.4	 14.3 x 9.3 x 6.6
Contact Ratings	Contact Form	SPST-NO		DPDT	
	Contact Type	Single Crossbar		Single Crossbar	
	Contact Material	Ag (Au-clad)		Ag (Au-clad)	
	Resistive Load	0.3 A at 125 VAC 1 A at 24 VDC		0.5 A at 125 VAC 1 A at 30 VDC	
	Max. Switching Current	1 A		1 A	
	Min. Permissible load	1 mA at 5 VDC		10 µA at 10 mVDC	
	Max. Switching Power	37.5 VA, 24 W		62.5 VA, 33 W	
	Max. Switching Voltage	125 VAC, 60 VDC		125 VAC, 110 VDC	
Coil ratings	Rated Voltage	3 to 24 VDC		3 to 48 VDC	
	Power Consumption (Approx.)	180 to 230 mW		140 to 280 mW	
Endurance	Electrical (operations)	100,000 min		200,000 min	
	Mechanical (operations)	5,000,000 min		100,000,000 min	
Dielectric strength	Between coil and contacts	1,000 VAC		1,000 VAC	
	Between contacts of different polarity	—		1,000 VAC	
	Between contacts of same polarity	750 VAC		750 VAC	
Ambient temperature (operating)		-40°C to 70°C		-40°C to 70°C	
Variations	Single Side Stable	•		•	
	Single Winding Latching			•	
	Double Winding Latching			•	
	Through Hole	•		•	
	Surface Mount	•		•	
	Fully Sealed	•		•	
Approved Standards		UL, CSA		UL, CSA	
Packaging	Min. Pack Quantity	50 (Tube)		50 (Tube)	25 (Tube)
	Min. Order Quantity	500 (Tube), 1,000 (Tape & reel)		1,000 (Tube), 400 (T&R)	500
Page		178		187	




Selection Guide – Signal Relays

Model		G6J-Y		
Features		Ultra compact and slim relay		
		ROHS compliant		
Appearance		G6J-2FS-Y 	G6J-2FL-Y 	G6J-2P-Y 
Dimensions (LxWxH)		10.6 x 5.7 x 10.0	10.6 x 5.7 x 10.0	10.6 x 5.7 x 9.0
Contact Ratings	Contact Form	DPDT		
	Contact Type	Bifurcated Crossbar		
	Contact Material	Ag (Au alloy contact)		
	Resistive Load	0.3 A at 125 VAC 1 A at 30 VDC		
	Max. Switching Current	1 A		
	Min. Permissible load	1 µA at 10 mVDC		
	Max. Switching Power	37.5 VA, 30 W		
	Max. Switching Voltage	125 VAC, 110 VDC		
Coil ratings	Rated Voltage	3 to 24 VDC		
	Power Consumption (Approx.)	140 to 230 mW		
Endurance	Electrical (operations)	100,000 min		
	Mechanical (operations)	50,000,000 min		
Dielectric strength	Between coil and contacts	1,500 VAC		
	Between contacts of different polarity	1,000 VAC		
	Between contacts of same polarity	750 VAC		
Ambient temperature (operating)		-40°C to 85°C		
Variations	Single Side Stable	•		
	Single Winding Latching	•		
	Double Winding Latching			
	Through Hole	•		
	Surface Mount	•		
	Fully Sealed	•		
Approved Standards		UL, CSA		
Packaging	Min. Pack Quantity	50 (Tube)		
	Min. Order Quantity	1,000 (Tube), 400 (Tape & reel)		
Page		193		



Selection Guide – Signal Relays

Model		G6K		
Features		Sub-miniature surface mounting relay		
		ROHS compliant		
Appearance		G6K-2F	G6K-2G	G6K-2P
Dimensions (LxWxH)		 10 x 6.5 x 5.4	 10 x 6.5 x 5.4	 10 x 6.5 x 5
Contact Ratings	Contact Form	DPDT		
	Contact Type	Bifurcated Crossbar		
	Contact Material	Ag (Au alloy)		
	Resistive Load	0.3 A at 125 VAC, 1 A at 30 VDC		
	Max. Switching Current	1 A		
	Min. Permissible load	10 µA at 10 mVDC		
	Max. Switching Power	37.5 VA, 30 W		
	Max. Switching Voltage	125 VAC, 60 VDC		
Coil ratings	Rated Voltage	3 to 24 VDC		
	Power Consumption (Approx.)	100 mW		
Endurance	Electrical (operations)	100,000 min		
	Mechanical (operations)	50,000,000 min		
Dielectric strength	Between coil and contacts	1,500 VAC		
	Between contacts of different polarity	1,000 VAC		
	Between contacts of same polarity	750 VAC		
Ambient temperature (operating)		-40°C to 70°C		
Variations	Single Side Stable	•		
	Single Winding Latching	•		
	Double Winding Latching			
	Through Hole	•		
	Surface Mount	•		
	Fully Sealed	•		
Approved Standards		UL, CSA		
Packaging	Min. Pack Quantity	50 (Tube)		
	Min. Order Quantity	1,000 (Tube), 900 (Tape & reel)		
Page		203		




Selection Guide – Signal Relays

Model		G6S		
Features		Surface mounting relay with 2.5kV surge voltage		
		ROHS compliant		
Appearance		G6S-2F	G6S-2	G6S-2G
Dimensions (LxWxH)				
		15 x 7.5 x 9.4	15 x 7.5 x 9.4	15 x 7.5 x 9.4
Contact Ratings	Contact Form	DPDT		
	Contact Type	Bifurcated Crossbar		
	Contact Material	Ag (Au alloy contact)		
	Resistive Load	0.5 A at 125 VAC, 1 A at 30 VDC		
	Max. Switching Current	2 A		
	Min. Permissible load	10 µA at 10 mVDC		
	Max. Switching Power	62.5 VA, 60 W		
	Max. Switching Voltage	250 VAC, 220 VDC		
Coil ratings	Rated Voltage	4.5 to 24 VDC		
	Power Consumption (Approx.)	140 to 200 mW		
Endura- nce	Electrical (operations)	100,000 min		
	Mechanical (operations)	100,000,000 min		
Dielectric strength	Between coil and contacts	2,000 VAC		
	Between contacts of different polarity	1,500 VAC		
	Between contacts of same polarity	1,000 VAC		
Ambient temperature (operating)		-40°C to 85°C		
Variations	Single Side Stable	•		
	Single Winding Latching	•		
	Double Winding Latching	•		
	Through Hole	•		
	Surface Mount	•		
	Fully Sealed	•		
Approved Standards		UL, CSA		
Packag- ing	Min. Pack Quantity	50 (Tube)		
	Min. Order Quantity	1,000 (Tube), 400 (Tape & reel)		
Page		213		




Selection Guide – Signal Relays

Model		G5A	G5V-2
Features		Sub-miniature relay	Miniature relay for signal circuits
		ROHS compliant	ROHS compliant
Appearance			
Dimensions (LxWxH)		16 x 9.9 x 8.4	20.5 x 10.1 x 11.5
Contact Ratings	Contact Form	DPDT	DPDT
	Contact Type	Bifurcated Crossbar	Bifurcated Crossbar
	Contact Material	Ag (Au-clad)	Ag (Au-clad)
	Resistive Load	0.5 A at 30 VAC 1 A at 30 VDC	0.5 A at 125 VAC 2 A at 30 VDC
	Max. Switching Current	1 A	2 A
	Min. Permissible load	10 µA at 10 mVDC	10 µA at 10 mVDC
	Max. Switching Power	37.5 VA, 33 W	62.5 VA, 60 W
	Max. Switching Voltage	125 VAC, 60 VDC	125 VAC, 125 VDC
Coil ratings	Rated Voltage	3 to 48 VDC	3 to 48 VDC
	Power Consumption (Approx.)	200 to 280 mW	500 to 580 mW (150 mW high sensitivity version)
Endurance	Electrical (operations)	100,000 min	100,000 min
	Mechanical (operations)	50,000,000 min	15,000,000 min
Dielectric strength	Between coil and contacts	1,000 VAC	1,000 VAC
	Between contacts of different polarity	1,000 VAC	1,000 VAC
	Between contacts of same polarity	500 VAC	750 VAC
Ambient temperature (operating)		-40°C to 70°C	-25°C to 65°C
Variations	Single Side Stable	•	•
	Single Winding Latching	•	
	Double Winding Latching	•	
	Through Hole	•	•
	Surface Mount		
	Fully Sealed	•	•
Approved Standards		UL, CSA	UL, CSA
	Min. Pack Quantity	25 (Tube)	25 (Tube)
	Min. Order Quantity	500	500
Page		222	226




Selection Guide – Signal Relays

Model		G6A				G6Y
Features		Fully sealed relay with high surge dielectric for use in telecommunications equipment				High frequency relay with high isolation and low insertion loss
		ROHS compliant				
Appearance		G6A-2  20.2 x 10.1 x 8.4		G6A-4  35.4 x 10.1 x 8.4		ROHS compliant  20.7 x 11.7 x 9.2
		Dimensions (LxWxH)				
Contact Ratings	Contact Form	DPDT		4PDT		SPDT
	Contact Type	Bifurcated Crossbar				Double-braking contact
	Contact Material	Ag (Au-clad)	AgPd (Au-clad)	Ag (Au-clad)	AgPd (Au-clad)	Au
	Resistive Load	0.5 A at 125 VAC 2 A at 30 VDC	0.3 A at 125 VAC 1 A at 30 VDC	0.5 A at 125 VAC 2 A at 30 VDC	0.3 A at 125 VAC 1 A at 30 VDC	10 mA at 30 VAC 10 mA at 30 VDC
	Max. Switching Current	2 A				0.5 A
	Min. Permissible load	10 µA at 10 mVDC				10 µA at 10 mVDC
	Max. Switching Power	125 VA, 60 W				10 VA (AC) 10 W (DC)
	Max. Switching Voltage	250 VAC, 220 VDC				30 VAC, 30 VDC
Coil ratings	Rated Voltage	3 to 48 VDC				3 to 24 VDC
	Power Consumption (Approx.)	200 to 235 mW		360 mW		200 mW
Endurance	Electrical (operations)	500,000 min				300,000 min
	Mechanical (operations)	100,000,000 min				50,000,000 min
Dielectric strength	Between coil and contacts	1,000 VAC				1,000 VAC
	Between contacts of different polarity	1,000 VAC				1,000 VAC
	Between contacts of same polarity	1,000 VAC				1,000 VAC
Ambient temperature (operating)		-40°C to 70°C				-40°C to 70°C
Variations	Single Side Stable	•				•
	Single Winding Latching	•				
	Double Winding Latching	•				
	Through Hole	•				•
	Surface Mount					
	Fully Sealed	•				•
Approved Standards		UL, CSA				–
Packaging	Min. Pack Quantity	25 (Tube)				100 (Tray)
	Min. Order Quantity	500				500
Page		231				240

Selection Guide – Signal Relays

Model		G6K(U)-2F-RF	G6Z	
Features		Surface mounting 1GHz band high frequency relay	Surface mountable 2.6GHz band miniature high frequency relay	
		ROHS compliant	ROHS compliant	
Appearance				
Dimensions (LxWxH)		10.3 x 6.9 x 5.4	20 x 8.6 x 9.3	20 x 8.6 x 8.9
Contact Ratings	Contact Form	DPDT	SPDT	
	Contact Type	Bifurcated Crossbar	Double-braking contact	
	Contact Material	Ag (Au-alloy)	Au-clad (Cu alloy)	
	Resistive Load	0.3 A at 125 VAC 1 A at 30 VDC	10 mA at 30 VAC 10 mA at 30 VDC	
	Max. Switching Current	1 A	0.5 A	
	Min. Permissible load	10 µA at 10 mVDC	10 µA at 10 mVDC	
	Max. Switching Power	1 W	10 VA (AC) 10 W (DC)	
	Max. Switching Voltage	125 VAC, 60 VDC	30 VAC, 30 VDC	
Coil ratings	Rated Voltage	3 to 24 VDC	3 to 24 VDC	
	Power Consumption (Approx.)	100 mW	200 mW	
Endurance	Electrical (operations)	100,000 min	300,000 min	
	Mechanical (operations)	50,000,000 min	1,000,000 min	
Dielectric strength	Between coil and contacts	750 VAC	1,000 VAC	
	Between contacts of different polarity	750 VAC	500 VAC	
	Between contacts of same polarity	750 VAC	500 VAC	
Ambient temperature (operating)		-40°C to 70°C	-40°C to 70°C	
Variations	Single Side Stable	•	•	
	Single Winding Latching	•	•	
	Double Winding Latching		•	
	Through Hole		•	
	Surface Mount	•	•	
	Fully Sealed		•	
Approved Standards		–	–	
Packaging	Min. Pack Quantity	50 (Tube)	25 (Tube)	
	Min. Order Quantity	1,000	500 (Tube), 300 (Tape & reel)	
Page		246	250	

Selection Guide – Signal Relays

Model		G6W		G9YA
Features		Surface mountable 2.5GHz band miniature high frequency relay		High frequency co-axial switch to 26GHz bandwidth
		ROHS compliant		
Appearance		G6W-1F 	G6W-1P 	
Dimensions (LxWxH)		20 x 9.4 x 9.3	20 x 9.4 x 8.9	34 x 13.2 x 39
Contact Ratings	Contact Form	SPDT		SPDT
	Contact Type	Double-braking single contact		Single contact
	Contact Material	Au		Gold
	Resistive Load	10 mA at 30 VAC 10 mA at 30 VDC		– –
	Max. Switching Current	0.5 A		–
	Min. Permissible load	10 µA at 10 mVDC		–
	Max. Switching Power	10 VA (AC), 10 W (DC)		–
	Max. Switching Voltage	230 VAC, 30 VDC		–
Coil ratings	Rated Voltage	3 to 48 VDC		4.5 to 28 VDC
	Power Consumption (Approx.)	200 to 360 mW	360 mW	Failsafe: 700 mW Doublecoil Latching: 500 mW
Endurance	Electrical (operations)	300,000 min		5,000,000 min
	Mechanical (operations)	1,000,000 min		5,000,000 min
Dielectric strength	Between coil and contacts	1,000 VAC		500 VAC
	Between contacts of different polarity	–		500 VAC
	Between contacts of same polarity	500 VAC		500 VAC
Ambient temperature (operating)		–40°C to 70°C		–55°C to 85°C
Variations	Single Side Stable		•	•
	Single Winding Latching		•	
	Double Winding Latching		•	•
	Through Hole		•	
	Surface Mount		•	
	Fully Sealed		•	
Approved Standards		–		–
Packaging	Min. Pack Quantity	25 (Tube)		–
	Min. Order Quantity	500		–
Page		266		274

Ultra-miniature, Highly Sensitive SPDT Relay for Signal Circuits

- ROHS compliant.
- Ultra-miniature at 12.5 x 7.5 x 10 mm (L x W x H).
- Wide switching power of 1 mA to 1 A.
- High sensitivity: 150mW nominal coil power.
- Fully sealed construction.
- International 2.54mm terminal pitch.
- Conforms to FCC Part 68 requirements for coil to contacts.



Ordering Information

Classification				Model
Contact form	Contact type	Contact material	Structure	
SPDT	Single crossbar	Ag + Au-clad	Fully sealed	G5V-1

Note: When ordering, add the rated coil voltage to the model number.

Example: G5V-1 12 VDC

Rated coil voltage

Model Number Legend

G5V - VDC

1 2

1. Contact Form
1: SPDT

2. Rated Coil Voltage
3, 5, 6, 9, 12, 24 VDC

Specifications

Coil Ratings

Rated voltage	3 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC
Rated current	50 mA	30 mA	25 mA	16.7 mA	12.5 mA	6.25 mA
Coil resistance	60 Ω	167 Ω	240 Ω	540 Ω	960 Ω	3,840 Ω
Coil inductance	0.05	0.15	0.20	0.45	0.85	3.48
(H) (ref. value)	0.11	0.29	0.41	0.93	1.63	6.61
Must operate voltage	80% max. of rated voltage					
Must release voltage	10% min. of rated voltage					
Max. voltage	200% of rated voltage at 23°C					
Power consumption	Approx. 150 mW					

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

2. Operating characteristics are measured at a coil temperature of 23°C.

■ Contact Ratings

Load	Resistive load ($\cos\varphi = 1$)
Rated Load	0.5 A at 125 VAC; 1 A at 24 VDC
Contact Material	Ag + Au-clad
Rated Carry Current	2 A
Max. switching voltage	125 VAC, 60 VDC
Max. switching current	1 A
Max. switching power	62.5 VA, 30 W
Failure rate (reference value)	1 mA at 5 VDC

Note: P level: $\lambda_{60} = 0.1 \times 10^{-6}$ /operation.

■ Characteristics

Contact resistance	100 mΩ max.
Operate time	5 ms max. (mean value: approx. 2.5 ms)
Release time	5 ms max. (mean value: approx. 0.9 ms)
Bounce Time	Operate: Approx. 0.2 ms Release: Approx. 5 ms
Max. operating frequency	Mechanical: 36,000 operations/hr Electrical: 1,800 operations/hr at rated load
Insulation resistance	1,000 MΩ min. (at 500 VDC between coil and contacts, at 250 VDC between contacts of same polarity.)
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between coil and contacts 400 VAC, 50/60 Hz for 1 min between contacts of same polarity
Impulse withstand voltage	1,500 V (10 x 160 μs) between coil and contacts (conforms to FCC Part 68)
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 1.65mm single amplitude (3.3mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 1.65mm single amplitude (3.3mm double amplitude)
Shock resistance	Destruction: 1,000 m/s ² Malfunction: 100 m/s ²
Endurance	Mechanical: 5,000,000 operations min. (at 18,000 operations/hr) Electrical: 100,000 operations min. (under rated load, at 1,800 operations/hr)
Ambient temperature	Operating: -40°C to 70°C (with no icing)
Ambient humidity	Operating: 5% to 85%
Weight	Approx. 2 g


■ Approved Standards

UL1950 (File No. E41515)/CSA C22.2 No.0, No.14 (File No. LR31928)


Model	Contact form	Coil ratings	Contact ratings
G5V-1	SPDT	3 to 24 VDC	0.5 A, 125 VAC (general use) 0.3 A, 110 VDC (resistive load) 1 A, 30 VDC (resistive load)

Engineering Data


Maximum Switching Power



Endurance





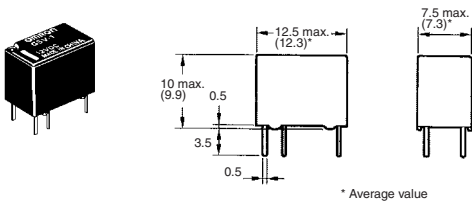
Ambient Temperature vs. Maximum Coil Voltage




Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

Dimensions


- Note:** 1. All units are in millimetres unless otherwise indicated.
2. Numbers in parentheses are reference values.
3. Tolerance: ± 0.1
4. Orientation marks are indicated as follows:  



Terminal Arrangement/
Internal Connections
(Bottom View)



Mounting Holes
(Bottom View)



Precautions

Long-term Continuously ON Contacts


Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts, because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. Be sure to use a fail-safe circuit design that provides protection against contact failure or coil burnout.

Relay Handling

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

Sub-miniature, Sensitive SPDT Signal Switching Relay

- ROHS compliant.
- High sensitivity: 98mW pickup coil power.
- Impulse withstand voltage meets FCC Part 48 requirements.
- Fully sealed construction.
- Unique moving loop armature reduces relay size, magnetic interference, and contact bounce time.
- Single- and double-winding latching types also available.

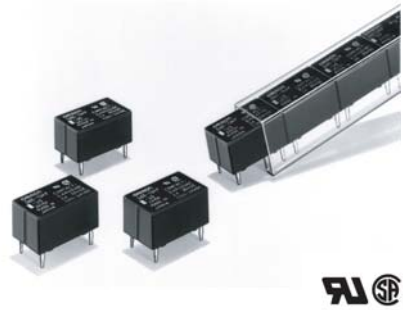

Ordering Information

Contact form		Terminal	Single-side stable	Single-winding latching	Double-winding latching
SPDT	Bifurcated crossbar	Straight terminal	G6E-134P-US	G6EU-134P-US	G6EK-134P-US
		Self-clinching terminal	G6E-134C-US	G6EU-134C-US	G6EK-134C-US

Note: When ordering, add the rated coil voltage to the model number.
Example: G6E-134P-US 12 VDC

12 Rated coil voltage

Model Number Legend

G6E - - VDC
1 2 3 4 5 6 7 8 9

1. Relay Function

None: Single-side stable
U: Single-winding latching
K: Double-winding latching

2. Contact Form

1: SPDT

3. Contact Type

3: Bifurcated crossbar
Ag (Au-clad) contact
9: Bifurcated crossbar
AgNi (Au-clad) contact

4. Enclosure Ratings

4: Fully sealed

5. Terminals

P: Straight PCB
C: Curved tail

6. Special Function

L: Low sensitivity coil (400 mW)

7. Approved Standards

US: UL, CSA certified

8. Special Function

U: For ultrasonically cleanable

9. Rated Coil Voltage

3, 5, 6, 9, 12, 24, 48 VDC

Specifications

■ Coil Ratings

Single-side Stable, Bifurcated Crossbar Contact Type

Rated voltage	3 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current	66.7 mA	40 mA	33.3 mA	22.2 mA	16.7 mA	8.3 mA	8.3 mA
Coil resistance	45 Ω	125 Ω	180 Ω	405 Ω	720 Ω	2,880 Ω	5,760 Ω
Coil inductance	Armature OFF	0.08	0.18	0.31	0.62	1.20	5.35
(H) (ref. value)	Armature ON	0.06	0.17	0.24	0.50	0.99	5.12
Must operate voltage	70% max. of rated voltage						
Must release voltage	10% min. of rated voltage						
Max. voltage	190% of rated voltage at 23°C						170% of rated voltage at 23°C
Power consumption	Approx. 200 mW						Approx 400 mW

Single-winding Latching, Bifurcated Crossbar Contact Type

Rated voltage	3 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC
Rated current	66.7 mA	40 mA	33.3 mA	22.2 mA	16.7 mA	8.3 mA
Coil resistance	45 Ω	125 Ω	180 Ω	405 Ω	720 Ω	2,880 Ω
Coil inductance	Armature OFF	0.05	0.13	0.19	0.45	3.56
(H) (ref. value)	Armature ON	0.04	0.12	0.17	0.40	3.10
Must set voltage	70% max. of rated voltage					
Must reset voltage	70% max. of rated voltage					
Max. voltage	190% of rated voltage at 23°C					
Power consumption	Approx. 200 mW					

Double-winding Latching, Bifurcated Crossbar Contact Type

Rated voltage			3 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC
Set Coil	Rated current		66.7 mA	40 mA	33.3 mA	22.2 mA	16.7 mA	8.3 mA
	Coil resistance		45 Ω	125 Ω	180 Ω	405 Ω	720 Ω	2,880 Ω
	Coil inductance	Armature OFF	0.03	0.09	0.12	0.25	0.44	1.66
	(H) (ref. value)	Armature ON	0.03	0.08	0.11	0.22	0.41	1.62
Reset Coil	Rated current		66.7 mA	40 mA	33.3 mA	22.2 mA	16.7 mA	8.3 mA
	Coil resistance		45 Ω	125 Ω	180 Ω	405 Ω	720 Ω	2,880 Ω
	Coil inductance	Armature OFF	0.03	0.09	0.12	0.25	0.44	1.66
	(H) (ref. value)	Armature ON	0.03	0.08	0.11	0.22	0.41	1.62
Must set voltage			70% max. of rated voltage					
Must reset voltage			70% max. of rated voltage					
Max. voltage			190% of rated voltage (at 23°C)					
Power consumption			Set coil: Approx. 200 mW Reset coil: Approx. 200 mW					

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
2. Operating characteristics are measured at a coil temperature of 23°C.

■ Contact Ratings

Load	Resistive load ($\cos\phi = 1$)		Inductive load ($\cos\phi = 0.4$; L/R = 7 ms)
Rated Load	0.4 A at 125 VAC; 2 A at 30 VDC		0.2 A at 125 VAC; 1 A at 30 VDC
Contact Material	Ag (Au-clad)		
Rated Carry Current	3 A		
Max. switching voltage	250 VAC, 220 VDC		
Max. switching current	3 A		3 A
Max. switching power	50 VA, 60 W		25 VA, 30 W
Failure rate (reference value)	10 μ A at 10m VDC		

Note: P level: $\lambda_{60} = 0.1 \times 10^{-6}$ /operation.

■ Characteristics

Contact resistance	50 m Ω max.
Operate (set*) time	5 ms max. (mean value: approx. 2.9 ms; 48 VDC type: approx. 2.4 ms)
Release (reset*) time	5 ms max. (mean value: approx. 1.3 ms)
Bounce time	Operate: 3 ms max. (mean value: 0.37 ms) Release: 3 ms max. (mean value: 1.12 ms)
Max. operating frequency	Mechanical: 36,000 operations/hr Electrical: 1,800 operations/hr (under rated load)
Insulation resistance	1,000 M Ω min. (at 500 VDC)
Dielectric withstand voltage	1,500 VAC, 50/60 Hz for 1 min between coil and contacts 1,000 VAC, 50/60 Hz for 1 min between contacts of same polarity
Impulse withstand voltage	1,500 V (10 x 160 μ s) (conforms to FCC Part 68)
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 2.5mm single amplitude (5mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 1.65mm single amplitude (3.3mm double amplitude)
Shock resistance	Destruction: 1,000 m/s ² Malfunction: 300 m/s ²
Endurance	Mechanical: 100,000,000 operations min. (at 36,000 operations/hr) Electrical: 100,000 operations min. (0.4 A at 125 VAC resistive load; 0.2 A at 125 VAC inductive load) 500,000 operations min. (2 A at 30 VDC resistive load; 1 A at 30 VDC inductive load) 200,000 operations min. (3 A at 30 VDC resistive load)
Ambient temperature	Operating: -40°C to 70°C (with no icing)
Ambient humidity	5% to 85%
Weight	Approx. 2.7 g


*Minimum set and reset signals width is 7 ms min.

■ Approved Standards
UL508 (File No. E41515)/CSA C22.2, No.14 (File No. LR31928)


Contact form	Coil ratings	Contact ratings
SPDT	3 to 48 VDC	0.2 A, 250 VAC (general use) 0.6 A, 125 VAC (general use) 2 A, 30 VDC (resistive) 0.6 A, 125 VDC (resistive, Ag contact only)

Engineering Data


Maximum Switching Power



Endurance



Ambient Temperature vs. Maximum Coil Voltage





Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

Dimensions


Note: 1. All units are in millimetres unless otherwise indicated.

2. Orientation marks are indicated as follows:  



G6E-134P-US G6E-194P-US



Terminal Arrangement/ Internal Connections (Bottom View)




G6E-194C-US

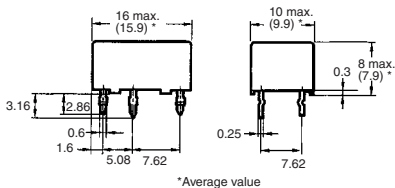



Mounting Holes (Bottom View)


Tolerance: ± 0.1



G6EU-134P-US G6EU-194P-US





Terminal Arrangement/ Internal Connections (Bottom View)




Mounting Holes (Bottom View)



G6EU-134C-US G6EU-194C-US

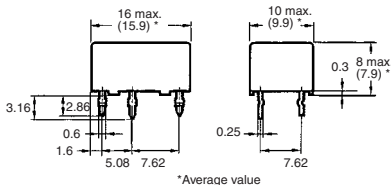


Mounting Holes (Bottom View) Tolerance: ± 0.1





G6EK-134P-US G6EK-194P-US




Terminal Arrangement/ Internal Connections (Bottom View)



G6EK-134C-US G6EK-194C-US

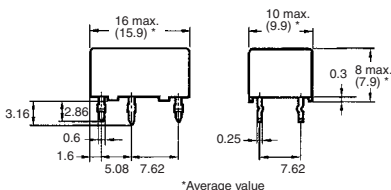

Mounting Holes (Bottom View) Tolerance: ± 0.1



Precautions

■ Precautions for Correct Use


Long-term Continuously ON Contacts

Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. We recommend using a latching relay (magnetic-holding relay) in this kind of circuit. If a single-side stable model must be used in this kind of circuit, we recommend using a fail-safe circuit design that provides protection against contact failure or coil burnout.

Installation


Do not reverse the polarity of the coil (+, -).

Provide sufficient space between Relays when mounting two or more on the same PCB, as shown in the following diagram.



Wiring

Refer to the following diagram when wiring to switch a DC load. The difference in polarity applied to the contacts will affect the endurance of the Relay due to the amount of contact movement. To extend the endurance characteristics beyond the performance ratings, wire the common (pin 7) terminal to the positive (+) side.



Ultrasonic Cleaning


Do not use ultrasonic cleaning on standard relay models. Doing so may result in resonance, coil burnout, and contact adhesion within the Relay. Use a model designed for ultrasonic cleaning if ultrasonic cleaning is required.

Relay Handling

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

Extremely Thin SPST-NO Flat Relay, One of the Thinnest Relays in the World

- ROHS compliant.
- Dimensions of 7.0(W) x 10.6(L) x 4.2(H) (SMD) or 3.8 mm(H) (TH) represent a reduction of approximately 20% in mounting area and approximately 67% in volume compared with the OMRON G5V-1, for higher-density mounting.
- Ensures a dielectric strength between coil and contacts (1,000), and conforms to FCC Part 68 (i.e., withstanding an impulse withstand voltage of 1.5 kW for 10 x160 μs).
- High dielectric strength between contacts of same polarity (750 VAC).
- Surface-Mounting relays are also available.
- Conforms to to UL60950 (File No. E41515 / CSA C222 No. 60950 (File No. LR31928)).
- Use of lead completely eliminated.

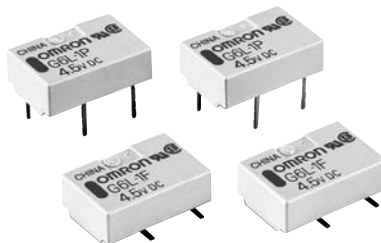

R C

Ordering Information

Classification			Single-side stable
SPST-NO	Fully sealed	Through-hole terminal	G6L-1P
		Surface-mounting terminal	G6L-1F

Note: 1. When ordering, add the rated coil voltage to the model number.

Example: G6L-1P 12 VDC

Rated coil voltage

2. When ordering tape packing, add “-TR” to the model number.

Example: G6L-1F-TR 12 VDC

Tape packing

Be sure since “-TR” is not part of the relay model number, it is not marked on the relay case.

Model Number Legend

G6L $\frac{\square}{1} - \frac{1}{2} \frac{\square}{3} - \frac{\square}{4}$

- | | |
|--|---|
| <p>1. Relay Function
None: Single-side stable relay</p> <p>2. Number of contact poles/ Contact form
1: SPST-NO</p> | <p>3. Terminal shape
P: PCB terminals
F: Surface-mounting terminals, short</p> <p>4. Packing state
None: Stick packing
TR: Tape packing</p> |
|--|---|

Application Examples

Peripherals of MODEM/PC, telephones, office automation machines, audio-visual products, communications equipment, measurement devices, amusement equipment, or security equipment.

Specifications

■ Contact Ratings

Item/Load	Resistive load
Contact mechanism	Single crossbar
Rated load	0.3 A at 125 VAC, 1 A at 24 VDC
Contact material	Ag (Au-clad)
Rated carry current	1 A
Max. switching voltage	125 VAC, 60 VDC
Max. switching current	1 A

■ Coil Ratings

Single-side Stable Relays (G6L-1P, G6L-1F)

Rated voltage	3 VDC	4.5 VDC	5 VDC	12 VDC	24 VDC
Rated current	60.0 mA	40.0 mA	36.0 mA	15.0 mA	9.6 mA
Coil resistance	50.0 Ω	112.5 Ω	139.0 Ω	800.0 Ω	2,504.0 Ω
Must operate voltage	75% max. of rated voltage				
Must release voltage	10% min. of rated voltage				
Max. voltage	150% of rated voltage				130% of rated voltage
Power consumption	Approx. 180 mW				Approx. 230 mW

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
2. Operating characteristics are measured at a coil temperature of 23°C.
3. The maximum voltage is the highest voltage that can be imposed on the Relay coil.

■ Characteristics

Classification		Single-side Stable Relays
Item/Model		G6L-1P, G6L-1F
Contact resistance (See note 1.)		100 mΩ max.
Operating time (See note 2.)		5 ms max. (approx. 1.1 ms)
Release time (See note 2.)		5 ms max. (approx. 0.4 ms)
Insulation resistance (See note 3.)		1,000 MΩ min. (at 500 VDC)
Dielectric strength	Coils & contacts	1,000 VAC, 50/60 Hz for 1 min
	Contacts of same polarity	750 VAC, 50/60 Hz for 1 min
Impulse with-stand voltage	Coil & contacts	1,500 VAC, 10 x 160 μs
Vibration resistance	Destruction	10 to 55 Hz, 1.65-mm single amplitude (3.3mm double amplitude)
	Malfunction	10 to 55 Hz, 1.65-mm single amplitude (3.3mm double amplitude)
Shock resistance	Destruction	1,000 m/s ²
	Malfunction	100 m/s ²
Endurance	Mechanical	5,000,000 operations min. (at 36,000 operations/hour)
	Electrical	100,000 operations min. (with a rated load at 1,800 operations/hour)
Failure rate (P level) (See note 4.)		1 mA at 5 VDC
Ambient temperature		Operating: -40°C to 70°C (with no icing or condensation)
Ambient humidity		Operating: 5% to 85%
Weight		Approx. 0.6 g

Note: 1. The contact resistance was measured with 10 mA at 1 VDC with a fall-of-potential method.

2. Values in parentheses are actual values.


3. The insulation resistance was measured with a 500-VDC Megger Tester applied to the same parts as those for checking the dielectric strength.

4. This value was measured at a switching frequency of 120 operations/min. This value may vary, depending on switching frequency, operating conditions, expected reliability level of the relay, etc. It is always recommended to double-check relay suitability under actual load conditions.


5. The above values are initial values.

Engineering Data

Maximum Switching Capacity




Ambient Temperature vs. Maximum Voltage




Note: "Maximum voltage" is the maximum voltage that can be applied to the Relay coil.


Ambient Temperature vs. Switching Current




Endurance




Ambient Temperature vs. Must Operate or Must Release Voltage




Shock Malfunction

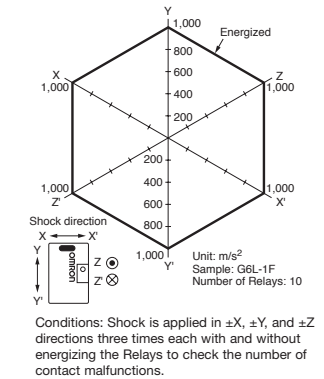


Electrical Endurance (with Must Operate and Must Release Voltage) (See note.)




Electrical Endurance (Contact Resistance) (See note.)




Contact Reliability Test (Contact Resistance) (See note.)






Mutual Magnetic Interference



Mutual Magnetic Interference




External Magnetic Interference




High-frequency Characteristics (Isolation)

(See note.)




High-frequency Characteristics (Insertion Loss)

(See note.)




High-frequency Characteristics (Return Loss, V.SWR)

(See note.)




Note: High-frequency characteristics depend on the PCB to which the Relay is mounted. Always check these characteristics, including endurance, in the actual machine before use.


Must Operate and Must Release Time Distribution (See note.)



Distribution of Bounce Time (See note.)



Vibration Resistance





Note: The tests were conducted at an ambient temperature of 23°C.

Dimensions

Note: All units are in millimetres unless otherwise indicated.


G6L-1P

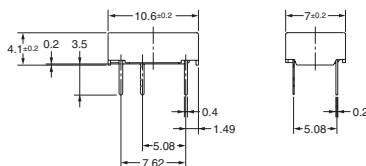


Note: Each value has a tolerance of ± 0.3 mm.

PCB Mounting Holes (Bottom View)


Tolerance: ± 0.1 mm



Terminal Arrangement/ Internal Connections (Bottom View)




G6L-1F




Note: Each value has a tolerance of ± 0.3 mm.

PCB Mounting Holes (Top View)

Tolerance: ± 0.1 mm



Terminal Arrangement/ Internal Connections (Top View)




Stick Packing and Tape Packing

1. STICK PACKING

Relays in stick packing are arranged so that the orientation mark of each Relay is on the left side.

Always confirm that the Relays are in the correct orientation when mounting the Relays to the PCBs.



Stick length: 552 mm (stopper not included)

No. of Relays per stick: 50

2. TAPE PACKING

(SURFACE-MOUNTING TERMINAL RELAYS)


When ordering Relays in tape packing, add the suffix "-TR" to the model number, otherwise the Relays in stick packing will be provided.

Tape type: TB2412R (Refer to EIAJ (Electronic Industries Association of Japan))


Reel type: R24D (Refer to EIAJ (Electronic Industries Association of Japan))

Relays per reel: 1,000

Direction of Relay Insertion

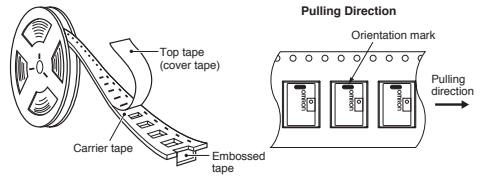


Reel Dimensions

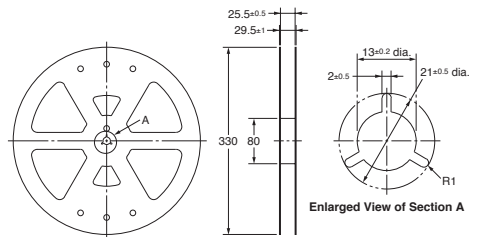

Carrier Tape Dimensions


G6L-1F

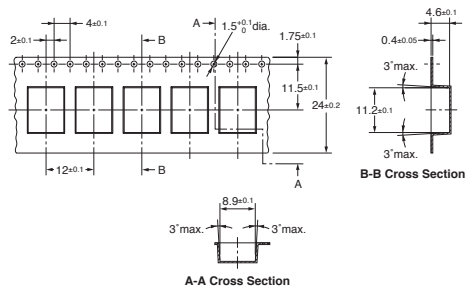


Recommended Soldering Method

TEMPERATURE PROFILE ACCORDING TO IRS

- When performing reflow-soldering, check the profile on an actual device after setting the temperature condition so that the temperatures at the relay terminals and the upper surface of the case do not exceed the limits specified in the following table.



- The thickness of cream solder to be applied should be within a range between 150 and 200 μm on OMRON's recommended PCB pattern.



Visually check that the Relay is properly soldered.

Item/ Measuring position	Preheating (T1 to T2, t1)	Soldering (T3, t1)	NPeak value (T2)
Terminal	150°C to 180°C, 120 s max.	180°C to 200°C, 20 to 30 s	245°C max.
Upper surface of case	—	—	250°C max.

Approved Standards

UL approval: UL60950 (File No. E41515)

CSA approval: C22.2 No.60950 (File No. LR31928)

Contact form	Coil ratings	Contact ratings	Number of test operations
SPST-NO	G6L-1P and G6L-1F: 3 to 24 VDC	1A at 30 VDC 0.5A at 60 VDC 0.3A at 125 VAC	6,000

Precautions

CORRECT USE

Long-term Continuously ON Contacts

Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. Be sure to use a fail-safe circuit design that provides protection against contact failure or coil burnout.

Relay Handling

Use the Relay as soon as possible after opening the moisture-proof package. If the Relay is left for a long time after opening the moisture-proof package, the appearance may suffer and seal failure may occur after the solder mounting process. To store the Relay after opening the moisture-proof package, place it into the original package and sealed the package with adhesive tape.

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

Soldering

Solder: JIS Z3282, H63A


Soldering temperature: Approx. 250°C (At 260°C if the DWS method is used.)

Soldering time: Approx. 5 s max. (approx. 2 s for the first time and approx. 3 s for the second time if the DWS method is used.)

Be sure to adjust the level of the molten solder so that the solder will not overflow onto the PCB.

Claw Securing Force During Automatic Insertion

During automatic insertion of Relays, make sure to set the securing force of the claws to the following values so that the Relay characteristics will be maintained.



Direction A: 5.0 N max.

Direction B: 5.0 N max.

Direction C: 5.0 N max.

Secure the claws to the area indicated by shading. Do not attach them to the center area or to only part of the Relay.

Environmental Conditions During Operation, Storage, and Transportation

Protect the Relays from direct sunlight and keep the Relays under normal temperature, humidity, and pressure.

Coil Power Supply Waveform

If the voltage applied to the coil is increased or decreased gradually, operating characteristics may be unstable, contact endurance may decline, or the Relay may not function at its full performance level. Therefore, always use an instantaneous ON and instantaneous OFF when applying the voltage. Be sure that the rated voltage or zero voltage is reached within 1 ms.

MAXIMUM VOLTAGE

The maximum voltage of the coil can be obtained from the coil temperature increase and the heat-resisting temperature of coil insulating sheath material. (Exceeding the heat-resisting temperature may result in burning or short-circuiting.) The maximum voltage also involves important restrictions which include the following:

- Must not cause thermal changes in or deterioration of the insulating material.
- Must not cause damage to other control devices.
- Must not cause any harmful effect on people.
- Must not cause fire.

Therefore, be sure not to exceed the maximum voltage specified in the catalog.


As a rule, the rated voltage must be applied to the coil. A voltage exceeding the rated value, however, can be applied to the coil provided that the voltage is less than the maximum voltage. It must be noted that continuous voltage application to the coil will cause a coil temperature increase thus affecting characteristics such as electrical life and resulting in the deterioration of coil insulation.

Coating

Relays mounted on PCBs may be coated or washed. Do not apply silicone coating or detergent containing silicone, otherwise the silicone coating or detergent may remain on the surface of the Relays.

Ultracompact, Ultrasensitive DPDT Relay

- ROHS compliant.
- Compact size and low 5mm profile.
- Low power consumption (140 mW for single-side stable, 100 to 300 mW for latching type) and high sensitivity.
- Low thermoelectromotive force.
- Low magnetic interference enables high-density mounting.
- Single- and double-winding latching types also available.

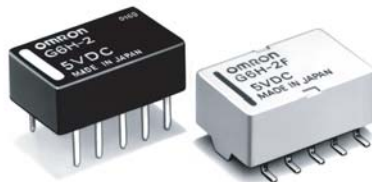

Ordering Information

Classification			Single-side stable	Single-winding latching	Double-winding latching
DPDT	Fully Sealed	PCB terminal	G6H-2	G6HU-2	G6HK-2
		Surface mount terminal	G6H-2F	—	—

Note: When ordering, add the rated coil voltage to the model number.

Example: G6HK-2 12 VDC

Rated coil voltage

Model Number Legend

G6H - - **VDC**
 1 2 3 4 5

1. Relay Function

None: Single-side stable
 U: Single-winding latching
 K: Double-winding latching

2. Contact Form

2: DPDT

3. Terminal Shape

None: PCB terminal
 F: Surface mount terminal

4. Classification

U: Ultrasonically cleanable

5. Rated Coil Voltage

3, 5, 6, 9, 12, 24 VDC

Specifications

■ Coil Ratings

Single-side Stable Type (G6H-2, G6H-2F)

Rated voltage	3 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC
Rated current	46.7 mA	28.1 mA	23.3 mA	15.5 mA	11.7 mA	8.3 mA
Coil resistance	64.3 Ω	178 Ω	257 Ω	579 Ω	1,028 Ω	2,880 Ω
Coil inductance Armature OFF	0.025	0.065	0.11	0.24	0.43	1.2
(H) (ref. value) Armature ON	0.022	0.058	0.09	0.20	0.37	1.0
Must operate voltage	75% max. of rated voltage					
Must release voltage	10% min. of rated voltage					
Max. voltage	200% of rated voltage at 23°C					170% of rated voltage at 23°C
Power consumption	Approx. 140 mW					Approx. 200 mW

Note: 48 VDC (single-side stable) model is also available. Consult OMRON for details.

PCB Signal Relay – G6H

Single-winding Latching Type (G6HU-2)

Rated voltage	3 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC
Rated current	33.3 mA	20 mA	16.7 mA	11.1 mA	8.3 mA	6.25 mA
Coil resistance	90 Ω	250 Ω	360 Ω	810 Ω	1,440 Ω	3,840 Ω
Coil inductance (H) (ref. value)	Armature OFF	0.034	0.11	0.14	0.33	0.60
	Armature ON	0.029	0.09	0.12	0.28	0.50
Must operate voltage	75% max. of rated voltage					
Must release voltage	75% min. of rated voltage					
Max. voltage	180% of rated voltage at 23°C					
Power consumption	Approx. 100 mW					Approx. 150 mW

Double-winding Latching Type (G6HK-2)

Rated voltage	3 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC
Rated current	66.7 mA	40 mA	33.3 mA	22.2 mA	16.7 mA	12.5 mA
Coil resistance	45 Ω	125 Ω	180 Ω	405 Ω	720 Ω	1,920 Ω
Coil inductance (H) (ref. value)	Armature OFF	0.014	0.042	0.065	0.16	0.3
	Armature ON	0.0075	0.023	0.035	0.086	0.33
Must operate voltage	75% max. of rated voltage					
Must release voltage	75% min. of rated voltage					
Max. voltage	160% of rated voltage at 23°C					130% of rated voltage at 23°C
Power consumption	Approx. 200 mW					Approx. 300 mW

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
2. Operating characteristics are measured at a coil temperature of 23°C.

■ Contact Ratings

Load	Resistive load ($\cos\varphi = 1$)
Rated load	0.5 A at 125 VAC; 1 A at 30 VDC
Contact material	Ag (Au-clad)
Rated carry current	1 A
Max. switching voltage	125 VAC, 110 VDC
Max. switching current	1 A
Max. switching power	62.5 VA, 33 W
Failure rate (reference value)	10 μA at 10 mVDC

Note: P level: $\lambda_{60} = 0.1 \times 10^{-6}$ /operation

■ Characteristics

Contact resistance	50 mΩ max. (G6H-2-U: 100 mΩ max.; G6H-2F: 60 mΩ max.)
Operate (set) time	Single-side stable types: 3 ms max. (mean value: approx. 2 ms) Latching types: 3 ms max. (mean value: approx. 1.5 ms)
Release (reset) time	Single-side stable types: 2 ms max. (mean value: approx. 1 ms) Latching types: 3 ms max. (mean value: approx. 1.5 ms)
Bounce time	Operate: Approx. 0.5 ms Release: Approx. 0.5 ms Set/reset: Approx. 0.5 ms
Min. set/reset signal width	Latching type: 5 ms min. (at 23°C)
Max. operating frequency	Mechanical: 36,000 operations/hr Electrical: 1,800 operations/hr (under rated load)
Insulation resistance	1,000 MΩ min. (at 500 VDC)
Dielectric withstand voltage	1,000 VAC, 50/60 Hz for 1 min between coil and contacts 1,000 VAC, 50/60 Hz for 1 min between contacts of different polarity 750 VAC, 50/60 Hz for 1 min between contacts of same polarity
Impulse withstand voltage	1,500 V (10 x 160 μs) between contacts of same polarity (conforms to FCC Part 68)
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 2.5mm single amplitude (5mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 1.65mm single amplitude (3mm double amplitude)
Shock resistance	Destruction: 1,000 m/s ² Malfunction: 500 m/s ²
Endurance	Mechanical: 100,000,000 operations min. (at 36,000 operations/hr) Electrical: 200,000 operations min. (at 1,800 operations/hr)
Ambient temperature	Operating: -40°C to 70°C (with no icing)
Ambient humidity	Operating: 5% to 85%
Weight	Approx. 1.5 g


■ Approved Standards

UL114, UL478 (File No. E41515)/CSA C22.2 No.0, No.14 (File No. LR31928)


Model	Contact form	Coil ratings	Contact ratings
G6H-2 G6HU-2 G6HK-2 G6H(U/K)-2-U G6H(U/K)-2-100	DPDT	1.5 to 48 VDC	2 A, 30 VDC 0.3 A, 110 VDC 0.5 A, 125 VAC

Engineering Data

Maximum Switching Power




Endurance




Ambient Temperature vs. Maximum Coil Voltage


Single-side Stable (G6H-2)



Single-winding Latching (G6HU-2)




Double-winding Latching (G6HK-2)



Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

Malfunctioning Shock Resistance (G6H-2)


5 VDC
Number of Units: 10




Condition: The Units were shocked at the rate of 500 m/s² three times each in the $\pm X$, $\pm Y$, and $\pm Z$ directions with and without voltage imposed on the Units until the Units malfunctioned.

High-frequency Characteristics (See notes 1 and 2.)


Frequency vs. Isolation




Frequency vs. Insertion Loss




Frequency vs. Return Loss, V.SWR



Distribution of Operate and Release Time (See note 1.)



Distribution of Bounce Time (See note 1.)



Note: 1. The ambient temperature is 23°C.

2. High-frequency characteristics depend on the PCB to which the Relay is mounted. Always check these characteristics, including endurance, in the actual machine before use.


Dimensions

Note: 1. All units are in millimetres unless otherwise indicated.


2. Orientation marks are indicated as follows:  

Single-side Stable Type

G6H-2(-U)

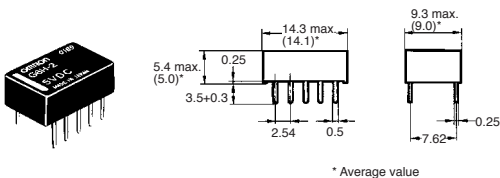


Terminal Arrangement/ Internal Connections (Bottom View)






Mounting Holes (Bottom View)

Tolerance: ± 0.1






Single-winding Latching Type

G6HU-2(-U)

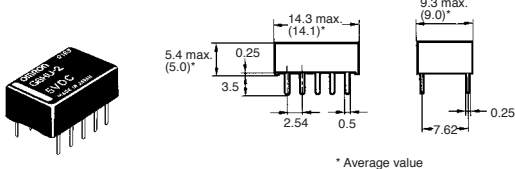




Double-winding Latching Type

G6HK-2(-U)

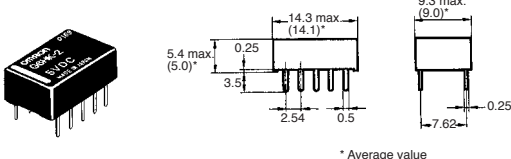

Single-side Stable Type

G6H-2F

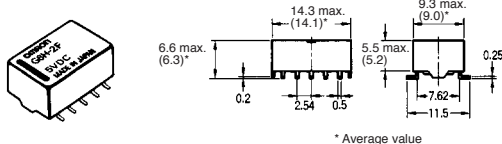

-

NEW

Classification				Single-side stable	Single-winding latching
DPDT	Plastic sealed	Through-hole terminal		G6J-2P-Y	G6JU-2P-Y
		Surface mount terminal	Short	G6J-2FS-Y	G6JU-2FS-Y
			Long	G6J-2FL-Y	G6JU-2FL-Y

Example: G6J-2P-Y 12 VDC

Rated coil voltage

Example: G6J-2P-Y-TR 12 VDC

Tape packing

Be sure since “-TR” is not part of the relay model number, it is not marked on the relay case.

G6J – –
1 2 3 4

- None: Single-side stable relay
U: Single-winding latching relay

- 2: DPDT

- P: PCB terminals
FS: Surface-mounting terminals, short
FL: Surface-mounting terminals, long

- Y: Improved product for soldering heat resistance

Telephones, communications equipment, measurement devices, office automation machines, audio-visual products.

Standard Specifications

Contact mechanism: Crossbar twin Ag (Au-alloy contact)

Enclosure rating: Plastic-sealed

■ Coil Rating

Single-side Stable Relays (G6J-2P-Y, G6J-2FS-Y, G6J-2FL-Y)

Rated voltage	3 VDC	4.5 VDC	5 VDC	12 VDC	24 VDC
Rated current	48.0 mA	32.6 mA	28.9 mA	12.3 mA	9.2 mA
Coil resistance	62.5 Ω	137.9 Ω	173.1 Ω	976.8 Ω	2,600.5 Ω
Must operate voltage	75% max. of rated voltage				
Must release voltage	10% min. of rated voltage				
Max. voltage	150% of rated voltage				
Power consumption	Approx. 140 mW				Approx. 230 mW

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of $\pm 10\%$.

2. Operating characteristics are measured at a coil temperature of 23°C.

3. The maximum voltage is the highest voltage that can be imposed on the Relay coil instantaneously.

Single-winding Latching Relays (G6JU-2P-Y, G6JU-2FS-Y, G6JU-2FL-Y)

Rated voltage	3 VDC	4.5 VDC	5 VDC	12 VDC	24 VDC
Rated current	33.7 mA	22.0 mA	20.4 mA	9.0 mA	5.2 mA
Coil resistance	89.0 Ω	204.3 Ω	245.5 Ω	1,329.2 Ω	4,619.2 Ω
Must set voltage	75% max. of rated voltage				
Must reset voltage	75% max. of rated voltage				
Max. voltage	150% of rated voltage				
Power consumption	Approx. 100 mW				

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of $\pm 10\%$.

2. Operating characteristics are measured at a coil temperature of 23°C.

3. The maximum voltage is the highest voltage that can be imposed on the Relay coil instantaneously.

■ Contact Ratings

Load	Resistive load
Rated load	0.3 A at 125 VAC; 1 A at 30 VDC
Contact material	Ag (Au-alloy contact)
Rated carry current	1 A
Max. switching voltage	125 VAC, 110 VDC
Max. switching current	1 A


■ Characteristics

Item		Single-side Stable Relays	Single-winding Latching Relays
		G6J-2P-Y, G6J-2FS-Y, G6J-2FL-Y	G6JU-2P-Y, G6JU-2FS-Y, G6JU-2FL-Y
Contact resistance (See note 1.)		100 mΩ max.	
Operating (set) time (See note 2.)		3 ms max. (approx. 1.6 ms)	
Release (reset) time (See note 2.)		3 ms max. (approx. 1.0 ms)	3 ms max. (approx. 0.9 ms)
Minimum set/reset signal width		–	10 ms
Insulation resistance (See note 3.)		1,000 MΩ min. (at 500 VDC)	
Dielectric strength	Coil & contacts	1,500 VAC, 50/60 Hz for 1 min	
	Contacts of different polarity	1,000 VAC, 50/60 Hz for 1 min	
	Contacts of same polarity	750 VAC, 50/60 Hz for 1 min	
Impulse with stand voltage	Coil & contacts	2,500 VAC, 2 x 10 μs	
	Contacts of different polarity	1,500 VAC, 10 x 160 μs	
	Contacts of same polarity		
Vibration resistance		Destruction: 10 to 55 Hz 2.5mm single amplitude (5mm double amplitude) Malfunction: 10 to 55 Hz 1.65mm single amplitude (3.3mm double amplitude)	
Shock resistance		Destruction: 1,000 m/s ² (approx. 100G) Malfunction: 750 m/s ² (approx. 75G)	
Life expectancy		Mechanical: 50,000,000 operations min. (at 36,000 operations/hour) Electrical: 100,000 operations min. (with a rated load at 1,800 operations/hour)	
Failure rate (P level) (See note 4.)		10 μA at 10 mVDC	
Ambient temperature		-40 to 85°C (with no icing or condensation)	
Ambient humidity		5% to 85%	
Weight		Approx. 1 g	


- Note:** 1. The contact resistance was measured with 10 mA at 1 VDC with a fall-of-potential method.
2. Values in parentheses are actual values.
3. The insulation resistance was measured with a 500-VDC Megger Tester applied to the same parts as those for checking the dielectric strength.
4. This value was measured at a switching frequency of 120 operations/min and the criterion of contact resistance is 5% of the load impedance. This value may vary depending on the operating frequency, operating conditions, expected reliability level of the relay, etc. Always double-check relay suitability under actual load conditions.
5. The above values are initial values.

Engineering Data

Maximum Switching Capacity




Ambient Temperature vs. Maximum Coil Voltage




Note: "Maximum voltage" is the maximum voltage that can be applied to the Relay coil.


Ambient Temperature vs. Switching Current




Electrical Endurance




Ambient Temperature vs. Must Operate or Must Release Voltage




Shock Malfunction

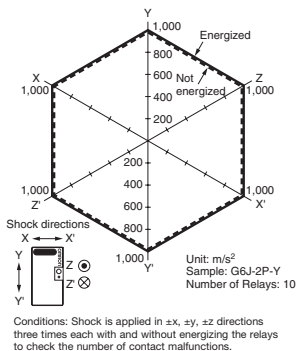


Electrical Endurance (with Operate and Release Voltage) (See note.)



Electrical Endurance (Contact Resistance) (See note.)





Contact Reliability Test (See note.)






Note: These tests were conducted at an ambient temperature of 23°C.

Mutual Magnetic Interference


Mutual Magnetic Interference

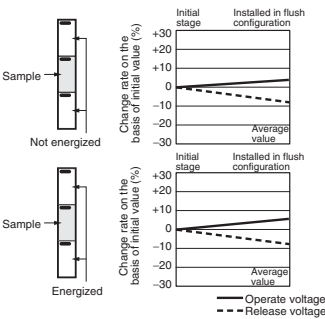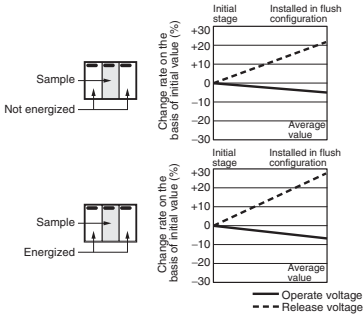


External Magnetic Interference




High-frequency Characteristics (Isolation)




High-frequency Characteristics (Insertion Loss)




High-frequency Characteristics (Return Loss, V.SWR)




Operate and Release Time
Distribution (See note.)



Operate and Release Bounce
Time Distribution (See note.)



Vibration Resistance






Note: These tests were conducted at an ambient temperature of 23°C.

Dimensions

Note: All units are in millimetres unless otherwise indicated.

G6J-2P-Y


G6JU-2P-Y



Note: Each value has a tolerance of ± 0.3 mm.

Mounting Dimensions (Bottom View)


Tolerance ± 0.1 mm



Terminal Arrangement/ Internal Connections (Bottom View)


G6J-2P

Orientation mark





G6JU-2P

Orientation mark



G6J-2FS-Y


G6JU-2FS-Y



Note: Each value has a tolerance of ± 0.3 mm.

Mounting Dimensions (Top View)


Tolerance ± 0.1 mm



Terminal Arrangement/ Internal Connections (Top View)


G6J-2FS

Orientation mark





G6JU-2FS

Orientation mark



G6J-2FL-Y


G6JU-2FL-Y



Note: Each value has a tolerance of ± 0.3 mm.

Mounting Dimensions (Bottom View)


Tolerance ± 0.1 mm



Terminal Arrangement/ Internal Connections (Top View)


G6J-2FL

Orientation mark



G6JU-2FL

Orientation mark




Stick Packing and Tape Packing

1. Stick Packing

Relays in stick packing are arranged so that the orientation mark of each Relay is on the left side.

Always confirm that the Relays are in the correct orientation when mounting the Relays to the PCBs.



Stick length: 555 mm (stopper not included)
No. of Relays per stick: 50

2. Tape Packing (Surface-mounting Terminal Relays)


When ordering Relays in tape packing, add the prefix “-TR” to the model number, otherwise the Relays in stick packing will be provided.

Tape type: TB2412R (EIAJ (Electronic Industrial Association of Japan))


Reel type: R24D (EIAJ (Electronic Industrial Association of Japan))

Relays per reel: 400

Direction of Relay Insertion

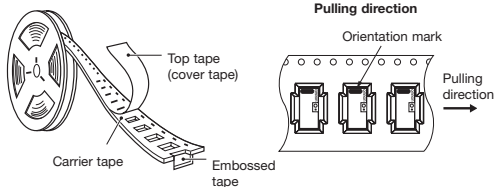


Reel Dimensions

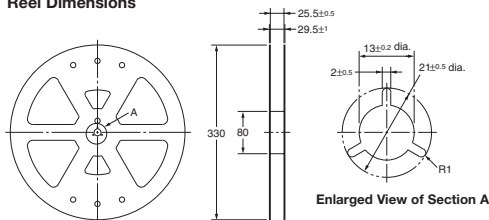


Carrier Tape Dimensions

G6J-2FS-Y, G6JU-2FS-Y

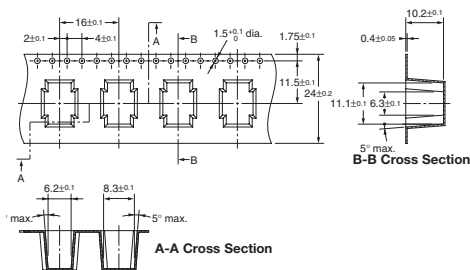


G6J-2FL-Y, G6JU-2FL-Y

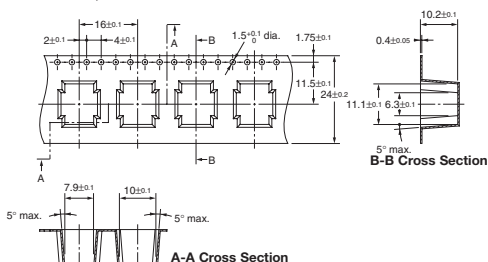

Recommended Soldering Method

IRS Method (for Surface-Mounting Terminal Relays)



Note: Temperatures are given for the surface of the terminal.


■ Approved Standards

UL approval: UL60950 (File No. E41515)
CSA approval: C22.2 No. 60950 (File No. LR31928)


Contact form	Coil ratings	Contact ratings	Number of test operations
DPDT	G6J-2P-Y, 2FS-Y, 2FL-Y: 3 to 24 VDC G6JU-2P-Y, 2FS-Y, 2FL-Y: 3 to 24 VDC	1 A at 30 VDC 0.5 A at 60 VDC 0.3 A at 125 VAC	6,000

- The thickness of cream solder to be applied should be between 150 and 200 μm on OMRON's recommended PCB pattern.
- In order to perform correct soldering, it is recommended that the correct soldering conditions be maintained as shown below on the left-hand side.

Correct Soldering



Incorrect Soldering



Visually check that the Relay is properly soldered.

Precautions

CORRECT USE

Long Term Current Carrying

Under a long-term current carrying without switching, the insulation resistance of the coil goes down gradually due to the heat generated by the coil itself. Furthermore, the contact resistance of the Relay will gradually become unstable due to the generation of film on the contact surfaces. A Latching Relay can be used to prevent these problems. When using a single-side stable relay, the design of the fail-safe circuit provides protection against contact failure and open coils.

Handling of Surface-mounting Relays

Use the Relay as soon as possible after opening the moisture-proof package. If the Relay is left for a long time after opening the moisture-proof package, the appearance may suffer and seal failure may occur after the solder mounting process. To store the Relay after opening the moisture-proof package, place it into the original package and sealed the package with adhesive tape.

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the relay in a cold cleaning bath immediately after soldering.

Soldering

Solder: JIS Z3282, H63A


Soldering temperature: Approx. 250°C (At 260°C if the DWS method is used.)

Soldering time: Approx. 5s max. (Approx. 2s for the first time and approx. 3s for the second time if the DWS method is used.)

Be sure to adjust the level of the molten solder so that the solder will not overflow onto the PCB.

Claw Securing Force During Automatic Mounting

During automatic insertion of Relays, make sure to set the securing force of the claws to the following values so that the Relay characteristics will be maintained.



Direction A: 4.90 N max.
Direction B: 9.80 N max.
Direction C: 9.80 N max.

Secure the claws to the area indicated by shading.

Do not attach them to the center area or to only part of the Relay.

Environmental Conditions During Operation, Storage, and Transportation

Protect the Relays from direct sunlight and keep the Relays under normal temperature, humidity, and pressure.

Mounting Latching Relays

Make sure that the vibration or shock that is generated from other devices, such as Relays in operation, on the same panel and imposed on the Latching Relays does not exceed the rated value, otherwise the Latching Relays that have been set may be reset or vice versa. The Latching Relays are reset before shipping. If excessive vibration or shock is imposed, however, the Latching Relays may be set accidentally. Be sure to apply a reset signal before use.

Maximum Voltage

The maximum voltage of the coil can be obtained from the coil temperature increase and the heat-resisting temperature of coil insulating sheath material. (Exceeding the heat-resisting temperature may result in burning or short-circuiting.) The maximum voltage also involves important restrictions which include the following:

- Must not cause thermal changes or deterioration of the insulating material.
- Must not cause damage to other control devices.
- Must not cause any harmful effect on people.
- Must not cause fire.

Therefore, be sure not to exceed the maximum voltage specified in the catalog.

As a rule, the rated voltage must be applied to the coil. A voltage exceeding the rated value, however, can be applied to the coil provided that the voltage is less than the maximum voltage. It must be noted that continuous voltage application to the coil will cause a coil temperature increase thus affecting characteristics such as electrical life and resulting in the deterioration of coil insulation.

Coating

Relays mounted on PCBs may be coated or washed. Do not apply silicone coating or detergent containing silicone, otherwise the silicone coating or detergent may remain on the surface of the Relays.

Other Handling

Please don't use the relay if it has been dropped. There is a possibility of damage.



Application Examples

Telephones, communications equipment, measurement devices, office automation machines, and audio-visual products.

Specifications

Contact mechanism: Bifurcated crossbar Ag (Au-alloy contact)

Enclosure ratings: Fully sealed

■ Coil Ratings

Single-side Stable Models – G6K-2F, G6K-2G, G6K-2P

Rated voltage	3 VDC	4.5 VDC	5 VDC	12 VDC
Rated current	33.0 mA	23.2 mA	21.1 mA	9.1 mA
Coil resistance	91 Ω	194 Ω	237 Ω	1,315 Ω
Must operate voltage	80% max. of rated voltage			
Must release voltage	10% min. of rated voltage			
Max. voltage	150% of rated voltage at 23°C to 70°C			
Power consumption	Approx. 100 mW			

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

2. The operating characteristics are measured at a coil temperature of 23°C.

3. The maximum voltage is the highest voltage that can be imposed on the relay coil instantaneously.

Single-side Stable Models (Bellcore Version) – G6K-2F-Y, G6K-2G-Y, G6K-2P-Y

Rated voltage	3 VDC	4.5 VDC	5 VDC	12 VDC	24 VDC
Rated current	33.0 mA	23.2 mA	21.1 mA	9.1 mA	4.6 mA
Coil resistance	91 Ω	194 Ω	237 Ω	1,315 Ω	5,220 Ω
Must operate voltage	80% max. of rated voltage				
Must release voltage	10% min. of rated voltage				
Max. voltage	150% of rated voltage at 23°C to 70°C				
Power consumption	Approx. 100 mW				

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

2. The operating characteristics are measured at a coil temperature of 23°C.

3. The maximum voltage is the highest voltage that can be imposed on the relay coil instantaneously.

Single-winding Latching Models (Bellcore Version) – G6KU-2F-Y, G6KU-2G-Y, G6KU-2P-Y

Rated voltage	3 VDC	4.5 VDC	5 VDC	12 VDC	24 VDC
Rated current	33.0 mA	23.2 mA	21.1 mA	9.1 mA	4.6 mA
Coil resistance	91 Ω	194 Ω	237 Ω	1,315 Ω	5,220 Ω
Must Set voltage	75% max. of rated voltage				
Must reset voltage	75% max. of rated voltage				
Max. voltage	150% of rated voltage at 23°C to 70°C				
Power consumption	Approx. 100 mW				

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

2. The operating characteristics are measured at a coil temperature of 23°C.

3. The maximum voltage is the highest voltage that can be imposed on the relay coil instantaneously.

■ Contact Ratings

Load	Resistive load
Rated load	0.3 A at 125 VAC; 1 A at 30 VDC
Contact material	Ag (Au-alloy contact)
Rated carry current	1 A
Max. switching voltage	125 VAC, 60 VDC
Max. switching current	1 A

■ Characteristics

Item	Single-side stable models (double-pole)		Single-winding latching model
	G6K-2F, G6K-2G, G6K-2P	G6K-2F-Y, G6K-2G-Y, G6K-2P-Y	G6KU-2F-Y, G6KU-2G-Y, G6KU-2P-Y
Contact resistance (see note 1)	100 mΩ max.		
Operating (set) time (see note 2)	3 ms max. (approx. 1.4 ms)		3 ms max. (approx. 1.2 ms)
Release (reset) time (see note 2)	3 ms max. (approx. 1.3 ms)		3 ms max. (approx. 1.2 ms)
Insulation resistance (see note 3)	1,000 MΩ min. (at 500 VDC)		
Dielectric strength	Coil & contacts	1,500 VAC, 50/60 Hz for 1 min	
	Contacts of different polarity	1,000 VAC, 50/60 Hz for 1 min	
	Contacts of same polarity	750 VAC, 50/60 Hz for 1 min	
Impulse withstand voltage	Coil & contacts	1,500 V (10 x 160 μs)	2,500 V (2 x 10 μs), 1,500 V (10 x 160 μs)
	Contacts of different polarity	1,500 V (10 x 160 μs)	
	Contacts of same polarity	—	
Vibration resistance	Destruction: 10 to 55 Hz, 2.5-mm single amplitude (5-mm double amplitude) and 55 to 500 Hz, 300 m/s ² (approx. 30G) Malfunction: 10 to 55 Hz, 1.65-mm single amplitude (3.3-mm double amplitude) and 55 to 500 Hz, 200 m/s ² (approx. 20G)		
Shock resistance	Destruction: 1,000 m/s ² (approx. 100G) Malfunction: 750 m/s ² (approx. 75G)		
Endurance	Mechanical: 50,000,000 operations min. (at 36,000 operations/hour) Electrical: 100,000 operations min. (with a rated load at 1,800 operations/hour)		
Failure rate (P level) (see note 4)	10 μA at 10 mVDC		
Ambient temperature	Operating: -40°C to 70°C (with no icing or condensation)		
Ambient humidity	Operating: 5% to 85%		
Weight	Approx. 0.7 g		

Note: The above values are initial values.

Note: 1. The contact resistance was measured with 10 mA at 1 VDC with a fall-of-potential method.


2. Values in parentheses are actual values.

3. The insulation resistance was measured with a 500-VDC Megger Tester applied to the same parts as those used for checking the dielectric strength.


4. This value was measured at a switching frequency of 120 operations/min.

Engineering Data

Maximum Switching Power




Ambient Temperature vs. Maximum Coil Voltage




Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.


Ambient Temperature vs. Switching Current




Endurance




Ambient Temperature vs. Must Operate or Must Release Voltage G6K-2G (F/P), G6K-2G (F/P)-Y




Ambient Temperature vs. Must Set or Must Reset Voltage G6KU-2G (F/P)-Y




Shock Malfunction

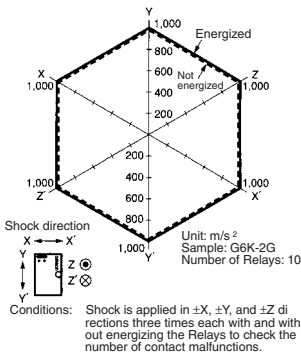


Electrical Endurance (with Must Operate and Must Release Voltage) (see note) G6K-2G (F/P), G6K-2G (F/P)-Y



Electrical Endurance (Contact Resistance) (see note) G6K-2G (F/P), G6K-2G (F/P)-Y




Contact Reliability Test (see note) G6K-2G (F/P), G6K-2G (F/P)-Y




Note: The test was conducted at an ambient temperature of 23°C.




Mutual Magnetic Interference G6K-2G (F/P), G6K-2G (F/P)-Y

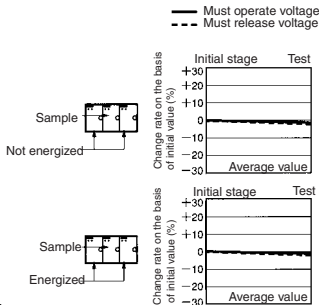


Mutual Magnetic Interference G6K-2G (F/P), G6K-2G (F/P)-Y




External Magnetic Interference G6K-2G (F/P), G6K-2G (F/P)-Y




High-frequency Characteristics (Isolation) G6K-2G (F/P), G6K-2G (F/P)-Y



High-frequency Characteristics (Insertion Loss) G6K-2G (F/P), G6K-2G (F/P)-Y



High-frequency Characteristics (Return Loss) G6K-2G (F/P), G6K-2G (F/P)-Y

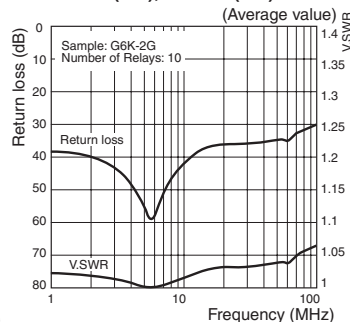


Note: 1. These tests were conducted at an ambient temperature of 23°C.


2. High-frequency characteristics depend on the PCB to which the Relay is mounted. Always check these characteristics, including endurance, in the actual machine before use.

Surface-Mounting Signal Relay – G6K


Must Operate and Must Release Time Distribution (see note)
G6K-2G (F/P), G6K-2G (F/P)-Y



Must Operate and Must Release Bounce Time Distribution (see note)
G6K-2G (F/P), G6K-2G (F/P)-Y



Vibration Resistance
G6K-2G (F/P), G6K-2G (F/P)-Y






Note: The tests were conducted at an ambient temperature of 23°C.

Dimensions

Note: 1. All units are in millimetres unless otherwise indicated.


■ DPDT

G6K-2F




Mounting Dimensions (Top View)

Tolerance: ± 0.1 mm






Terminal Arrangement/ Internal Connections (Top View)




Note: Each value has a tolerance of ± 0.3 mm.

G6K-2G




Mounting Dimensions (Top View)

Tolerance: ± 0.1 mm






Terminal Arrangement/ Internal Connections (Top View)




Note: Each value has a tolerance of ± 0.3 mm.

G6K-2P




Mounting Dimensions (Bottom View)

Tolerance: ± 0.1 mm






Terminal Arrangement/ Internal Connections (Bottom View)



Note: Each value has a tolerance of ± 0.3 mm.


Surface-Mounting Signal Relay – G6K

G6K-2F-Y




Mounting Dimensions (Top View)

Tolerance: ± 0.1 mm






Terminal Arrangement/ Internal Connections (Top View)




Note: Each value has a tolerance of ± 0.3 mm.

G6K-2G-Y




Mounting Dimensions (Top View)

Tolerance: ± 0.1 mm






Terminal Arrangement/ Internal Connections (Top View)




Note: Each value has a tolerance of ± 0.3 mm.

G6K-2P-Y




Mounting Dimensions (Bottom View)

Tolerance: ± 0.1 mm






Terminal Arrangement/ Internal Connections (Bottom View)




Note: Each value has a tolerance of ± 0.3 mm.

G6KU-2F-Y




Mounting Dimensions (Top View)

Tolerance: ± 0.1 mm






Terminal Arrangement/ Internal Connections (Top View)




Note: Each value has a tolerance of ± 0.3 mm.

G6KU-2G-Y




Mounting Dimensions (Top View)

Tolerance: ± 0.1 mm






Terminal Arrangement/ Internal Connections (Top View)




Note: Each value has a tolerance of ± 0.3 mm.

G6KU-2P-Y




Mounting Dimensions (Bottom View)

Tolerance: ± 0.1 mm



Terminal Arrangement/ Internal Connections (Bottom View)




Note: Each value has a tolerance of ± 0.3 mm.

Stick Packing and Tape Packing

Stick Packing

Relays in stick packing are arranged so that the orientation mark of each Relay is on the left side. Fifty Relays are packed on one stick.

Be sure not to make mistakes in Relay orientation when mounting the Relay to the FPCB.



Stick length: 520 mm (stopper not included)

No. of Relays per stick: 50

Tape Packing (Surface-Mounting Terminal Models)

When ordering Relays in tape packing, add the prefix “-TR” to the model number, otherwise the Relays in stick packing will be provided.


Tape Type: ETX7200

(EIAJ (Electronic Industrial Association of Japan))


Reel type: RPM-16D (EIAJ)

Relays per Reel: 900

1. Direction of Relay Insertion

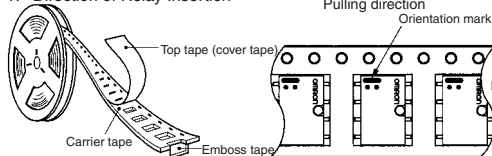


2. Reel Dimensions




3. Carrier Tape Dimensions

G6K-2F, G6K-2F-Y, G6KU-2F-Y

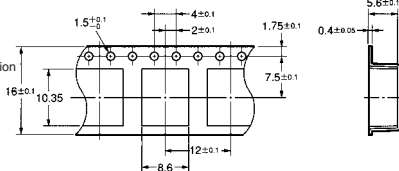


G6K-2G, G6K-2G-Y, G6KU-2G-Y

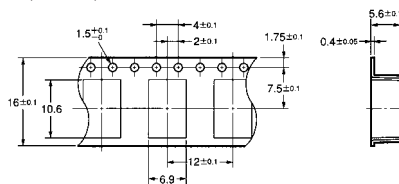


Recommended Soldering Method

Temperatures indicate the surface temperatures of the PCB.

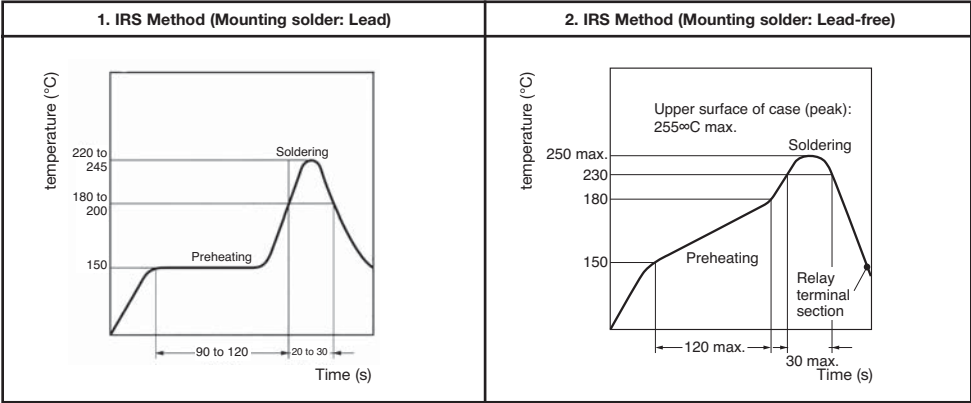

- The thickness of cream solder to be applied should be within a range between 150 and 200 μm on OMRON's recommended PCB pattern.
- In order to perform correct soldering, it is recommended that the correct soldering conditions be maintained as shown below on the left side.

Note: The temperature profile indicates the temperature of the relay terminal section.



Visually check that the Relay is properly soldered.

Approved Standards

UL approval: UL1950 (File No. E41515)

CSA approval: C22.2 No. 950 (File No. LR24825)

Model	Coil ratings	Contact ratings	Number of test operations
DPDT	G6K-2G(F/P): 3 to 12 VDC	1 A at 30 VDC G6K(U)-2G(F/P)-Y: 3 to 24 VDC	6,000 0.5 A at 60 VDC 0.3 A at 125 VAC

Precautions

CORRECT USE

Handling

Leave the Relay unpacked until mounting it.

Soldering

Solder: JIS Z3282, H63A


Soldering temperature: Approx. 250°C (260°C if the DWS method is used)

Soldering time: Approx. 5 s max. (approx. 2 s for the first time and approx. 3 s for the second time if the DWS method is used)

Be sure to make a molten solder level adjustment so that the solder will not overflow on the PCB.

Claw Securing Force During Automatic Mounting

During automatic insertion of Relays, make sure to set the securing force of each claw to the following so that the Relays characteristics are maintained.



Environmental Conditions During Operation, Storage, and Transportation

Protect the Relay from direct sunlight and keep the Relay under normal temperature, humidity, and pressure.

If the Relay is stored for a long time in an adverse environment with high temperature, high humidity, organic gases, or sulphide gases, sulphide or oxide films will form on the contact surfaces. These films may result in unstable contact, contact problems, or functional problems. Therefore, operate, store, or transport the product under specified environmental conditions.

Latching Relay Mounting

Make sure that the vibration or shock that is generated from other devices, such as relays in operation, on the same panel and imposed on the Latching Relay does not exceed the rated value, otherwise the Latching Relay that has been set may be reset or vice versa. The Latching Relay is reset before shipping. If excessive vibration or shock is imposed, however, the Latching Relay may be set accidentally. Be sure to apply a reset signal before use.

Maximum Allowable Voltage

The maximum allowable voltage of the coil can be obtained from the coil temperature increase and the heat-resisting temperature of coil insulating sheath material. (Exceeding the heat-resisting temperature may result in burning or short-circuiting.) The maximum allowable voltage also involves important restrictions which include the following:

- Must not cause thermal changes in or deterioration of the insulating material.
- Must not cause damage to other control devices.
- Must not cause any harmful effect on people.
- Must not cause fire.

Therefore, be sure to use the maximum allowable voltage beyond the value specified in the catalog.

As a rule, the rated voltage must be applied to the coil. A voltage exceeding the rated value, however, can be applied to the coil provided that the voltage is less than the maximum allowable voltage. It must be noted that continuous voltage application to the coil will cause a coil temperature increase thus affecting characteristics such as electrical life and resulting in the deterioration of coil insulation.


Coating

The Relay mounted on the PCB may be coated or washed but do not apply silicone coating or detergent containing silicone, otherwise the silicone coating or detergent may remain on the surface of the Relay.


PCB Mounting

If two or more Relays are closely mounted with the long sides of the Relays facing each other and soldering is performed with infrared radiation, the solder may not be properly exposed to the infrared rays. Be sure to keep the proper distance between adjacent Relays as shown below.

G6K-2G




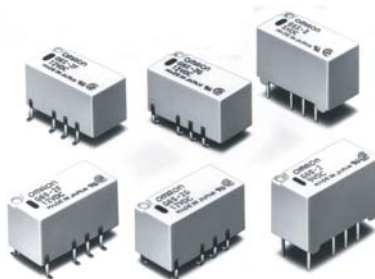
G6K-2F



Two or more Relays may be closely mounted with the short sides of the Relays facing each other.

Surface-Mounting DPDT Relay

- ROHS compliant.
 - Long terminals ideal for soldering and mounting reliability.
 - Space-saving inside-L terminal.
 - High dielectric strength between coil and contacts (2,000 VAC), and between contacts of different polarity (1,500 VAC).
 - High impulse withstand voltages between coil and contacts, and between contacts of different polarity (2,500 V, 2 10 μ s: Bellcore requirements).
 - Low power consumption (140 mW).
 - Bifurcated crossbar contact (Au-clad) and Fully sealed construction for high reliability.
 - Applicable to IRS.
 - High sealability after IRS.
- 
- Ultra-miniature at 15 x 7.5 x 9.4 mm (L x W x H).
 - Through-hole terminal is available
 - EN60950/EN41003 Supplementary Insulation-certified type is available.



Ordering Information

Classification				Single-side Stable	Single-winding latching	Double-winding latching	Single-side stable EN60950/EN41003
DPDT	Fully sealed	Through-hole terminal		G6S-2	G6SU-2	G6SK-2	G6S-2-Y
		Surface mounting terminal	Inside-L	G6S-2G	G6SU-2G	G6SK-2G	G6S-2G-Y
			Outside-L	G6S-2F	G6SU-2F	G6SK-2F	G6S-2F-Y

Note: 1. When ordering, add the rated coil voltage to the model number.

Example: G6S-2F 12 VDC

 Rated coil voltage

2. When ordering tape packing, add -TR" to the model number.

Example: G6S-2F-TR 12 VDC

 Tape packing

Be sure since -TR" is not part of the relay model number, it is not marked on the relay case.

Model Number Legend

G6S@-@@-@ @ VDC

1. Relay Function

None: Single-side stable

U: Single-winding latching

K: Double-winding latching

2. Contact Form

2: DPDT

3. Terminal Shape

None: Through-hole terminal

G: Inside-L surface mounting terminal

F: Outside-L surface mounting terminal

4. Approved Standards

None: UL/CSA

Y: EN60950/EN41003

5. Rated Coil Voltage

4.5, 5, 12, 24 VDC

Specifications

■ Coil Ratings

Single-side Stable Type (G6S-2, G6S-2F, G6S-2G)

Rated voltage	4.5 VDC	5 VDC	12 VDC 24 VDC
Rated current	31.0 mA	28.1 mA	11.7 mA 8.3 mA
Coil resistance	145 Ω	178 Ω	1,028 Ω 2,880 Ω
Must operate voltage	75% max. of rated voltage		
Must release voltage	10% min. of rated voltage		
Max. voltage	200% of rated voltage at 23°C		170% of rated voltage at 23°C
Power consumption	Approx. 140 mW		Approx. 200 mW

Single-winding Latching Type (G6SU-2, G6SU-2F, G6SU-2G)

Rated voltage	4.5 VDC	5 VDC	12 VDC	24 VDC
Rated current	22.2 mA	20 mA	8.3 mA	6.3 mA
Coil resistance	203 Ω	250 Ω	1,440 Ω	3,840 Ω
Coil inductance	Armature OFF	0.27	0.36	5.80
(H) (ref. value)	Armature ON	0.14	0.18	1.14 3.79
Must set voltage	75% max. of rated voltage			
Must reset voltage	75% min. of rated voltage			
Max. voltage	180% of rated voltage at 23°C			
Power consumption	Approx. 100 mW			Approx. 150 mW

Double-winding Latching Type (G6SK-2, G6SK-2F, G6SK-2G)

Rated voltage	4.5 VDC	5 VDC	12 VDC	24 VDC
Rated current	44.4 mA	40 mA	16.7 mA	12.5 mA
Coil resistance	101 Ω	125 Ω	720 Ω	1,920 Ω
Coil inductance (H) (ref. value)	Set	Armature OFF	0.12	0.14 0.60 1.98
		Armature ON	0.074	0.088 0.41 1.23
	Reset	Armature OFF	0.082	0.098 0.46 1.34
		Armature ON	0.14	0.16 0.54 2.23
Must set voltage	75% max. of rated voltage			
Must reset voltage	75% min. of rated voltage			
Max. voltage	170% of rated voltage at 23°C			140% of rated voltage at 23°C
Power consumption	Approx. 200 mW			Approx. 300 mW

- Note:** 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
2. Operating characteristics are measured at a coil temperature of 23°C.
3. The maximum voltage is the highest voltage that can be imposed on the relay coil.

Surface-Mounting Signal Relay – G6S

Single-side Stable EN60950/EN41003 Approved Type (G6S-2-Y, G6S-2F-Y, G6S-2G-Y)

Rated voltage	5 VDC	12 VDC	24 VDC
Rated current	40 mA	16.7 mA	9.6 mA
Coil resistance	125 Ω	720 Ω	2,504 Ω
Must operate voltage	75% max. of rated voltage		
Must release voltage	10% min. of rated voltage		
Max. voltage	170% of rated voltage at 23°C		170% of rated voltage at 23°C
Power consumption	Approx. 200 mW		Approx. 230 mW

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
2. Operating characteristics are measured at a coil temperature of 23°C.
3. The maximum voltage is the highest voltage that can be imposed on the relay coil.

Contact Ratings

Load	Resistive load ($\cos\phi = 1$)
Rated Load	0.5 A at 125 VAC; 2 A at 30 VDC
Contact material	Ag (Au-alloy)
Rated Carry Current	2 A
Max. switching voltage	250 VAC, 220 VDC
Max. switching current	2 A
Max. switching power	62.5 VA, 60 W
Failure rate (reference value) (see note)	10 μA at 10 mVDC

Note: P level: $\lambda_{60} = 0.1 \times 10^{-6}$ /operation. This value was measured at a switching frequency of 120 operations/min and the criterion of contact resistance is 50Ω. This value may vary depending on the operating environment. Always double-check relay suitability under actual operating conditions.

■ Characteristics

Contact resistance (Note)	75 mΩ max.
Operate (set) time (Note 2)	4 ms max. (mean value: approx. 2.5 ms; latching type: approx. 2 ms)
Release (reset) time (Note 2)	4 ms max. (mean value: approx. 1.5 ms; latching type: approx. 2 ms)
Bounce Time	Operate: Approx. 0.5 ms Release: Approx. 0.5 ms Set/Reset: Approx. 0.5 ms
Max. operating frequency	Mechanical: 36,000 operations/hr Electrical: 1,800 operations/hr (under rated load)
Insulation resistance (Note 3)	1,000 MΩ min. (at 500 VDC)
Dielectric strength	2,000 VAC, 50/60 Hz for 1 min between coil and contacts 1,000 VAC, 50/60 Hz for 1 min between coil and contacts (double-winding latching) 1,500 VAC, 50/60 Hz for 1 min between contacts of different polarity 1,000 VAC, 50/60 Hz for 1 min between contacts of same polarity 500 VAC, 50/60 Hz for 1 min between set and reset coil (double-winding latching)
Impulse withstand voltage	2,500 V (2 x 10 μs) between coil and contacts 1,500 V (10 x 160 μs) between coil and contacts (double-winding latching) 2,500 V (2 x 10 μs) between contacts of different polarity 1,500 V (10 x 160 μs) between contacts of same polarity (conforms to FCC Part 68)
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 2.5mm single amplitude (5mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 1.65mm single amplitude (3.3mm double amplitude)
Shock resistance	Destruction: 1,000 m/s ² (approx. 100G) Malfunction: 750 m/s ² (approx. 175G)
Endurance	Mechanical: 100,000,000 operations min. (at 36,000 operations/hr) Electrical: 100,000 operations min. (2 A at 30 VDC, resistive load; 1,200 operations/hr) 100,000 operations min. (0.5 A at 125 VAC, resistive load)
Ambient temperature	Operating: -40°C to 85°C (with no icing), -40°C to 70°C (double-winding latching, 24 VDC)
Ambient humidity	Operating: 5% to 85%
Weight	Approx. 2 g

Note: The above values are initial values.

Note: 1. The contact resistance was measured with 10mA at 1 VDC with a voltage drop method.

Note: 2. Values in parentheses are actual values.

Note: 3. The insulation resistance was measured with a 500-VDC megohmmeter applied to the same parts as those used for checking the dielectric strength (except between the set and reset coil).

■ Approved Standards

UL1950 (File No. E41515)/CSA C22.2 No.950 (File No. LR24825)


Model	Contact form	Coil ratings	Contact ratings
G6S-2, G6S-2F, G6S-2G	DPDT	1.5 to 48 VDC	2 A, 30 VDC
G6SU2, G6SK-2, G6SU-2F		1.5 to 24 VDC	0.3 A, 110 VDC
G6SU2G, G6SK-2F, G6SK-2G			0.5 A, 125 VAC

EN60950/EN41003


Model	Contact form	Isolation category	Voltage
G6S-2-Y, G6S-2G-Y, G6S-2F-Y	DPDT	Supplementary Isolation	250 VAC

Engineering Data


Maximum Switching Power



Ambient Temperature vs. Maximum Coil Voltage
Single-side Stable



Single-winding Latching
Double-winding Latching




Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.


Reference Data

Ambient Temperature vs. Switching Current

Single-side Stable




Single-winding Latching
Double-winding Latching



Recommended Soldering Method

Temperatures indicate the surface temperatures of the PCB.

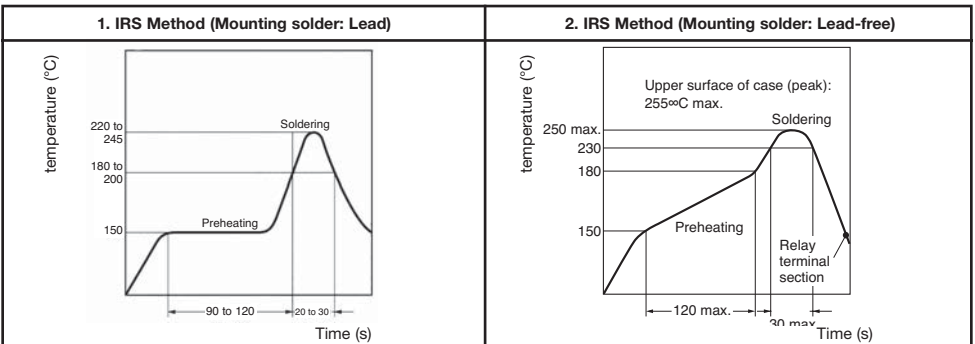

- The thickness of cream solder to be applied should be within a range between 150 and 200 μm on OMRON's recommended PCB pattern.
- In order to perform correct soldering, it is recommended that the correct soldering conditions be maintained as shown below on the left side.

Note: The temperature profile indicates the temperature of the relay terminal section.




Dimensions

Note: All units are in millimetres unless otherwise indicated.


Single-side Stable

G6S-2, G6S-2-Y

Tolerance: ± 0.3






Terminal Arrangement/ Internal Connections (Bottom View)




G6S-2F, G6S-2F-Y

Tolerance: ± 0.3






Terminal Arrangement/ Internal Connections (Top View)




G6S-2G, G6S-2G-Y

Tolerance: ± 0.3





Terminal Arrangement/ Internal Connections (Top View)



Single-winding Latching


G6SU-2

Tolerance: ± 0.3




Footprint (Bottom View)

Tolerance: ± 0.1





Terminal Arrangement/ Internal Connections (Bottom View)




G6SU-2F

Tolerance: ± 0.3




Footprint (Top View)

Tolerance: ± 0.1





Terminal Arrangement/ Internal Connections (Top View)




G6SU-2G

Tolerance: ± 0.3




Footprint (Top View)

Tolerance: ± 0.1



Terminal Arrangement/ Internal Connections (Top View)





Surface-Mounting Signal Relay – G6S

Double-winding Latching


G6SK-2

Tolerance: ± 0.3




Footprint (Bottom View)

Tolerance: ± 0.1





Terminal Arrangement/ Internal Connections (Bottom View)




G6SK-2F

Tolerance: ± 0.3




Footprint (Top View)

Tolerance: ± 0.1





Terminal Arrangement/ Internal Connections (Top View)




G6SK-2G

Tolerance: ± 0.3




Footprint (Top View)

Tolerance: ± 0.1



Terminal Arrangement/ Internal Connections (Top View)




■ Tape Packing

When ordering, add “-TR” before the rated coil voltage for tape packing.


Tape type: TE2416R (Refer to EIAJ)

Reel type: R24E (Refer to EIAJ)


Relays per reel: 400

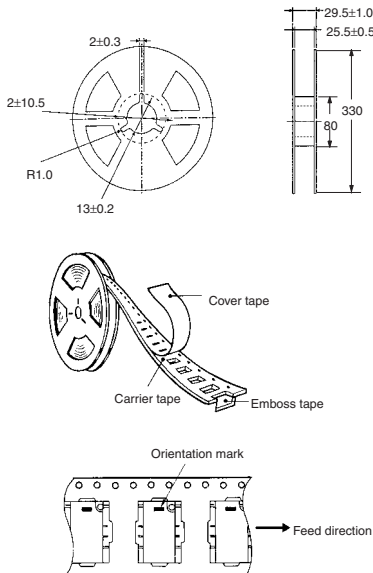

G6S-2F, G6SU-2F, G6SK-2F, G6S-2F-Y

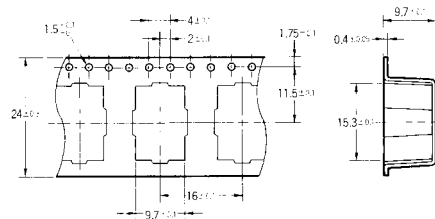

G6S-2G, G6SU-2G, G6SK-2G, G6S-2G-Y

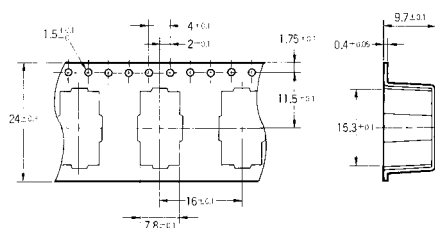

Precautions

Use a DC power supply with 5% or less ripple factor to operate the coil.

Do not use the G6S where subject to strong external magnetic fields.

Do not use the G6S where subject to magnetic particles or excessive amounts of dust.

Do not reverse the polarity of the coil (+, -).

Latching types are delivered in the reset position. We recommend that a reset voltage be applied in advance to start operation.

Do not drop the G6S or otherwise subject it to excessive shock.

Remove the relay from the packing immediately prior to usage.

■ Precautions

Long-term Continuously ON Contacts

Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. We recommend using a latching relay (magnetic-holding relay) in this kind of circuit. If a single-side stable model must be used in this kind of circuit, we recommend using a fail-safe circuit design that provides protection against contact failure or coil burnout.

Relay Handling

Use the Relay as soon as possible after opening the moisture-proof package. If the Relay is left for a long time after opening the moisture-proof package, the appearance may suffer and seal failure may occur after the solder mounting process. To store the

Relay after opening the moisture-proof package, place it into the original package and sealed the package with adhesive tape.

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

G6S (K) (-U) -2 Soldering


Soldering temperature: Approx. 250°C (At 260°C if the DWS method is used.)

Soldering time: Approx. 5 s max. (Approx. 2 s for the first time and approx. 3 s for the second time if the DWS method is used.)

Be sure to adjust the level of the molten solder so that the solder will not overflow onto the PCB.

Claw Securing Force During Automatic Mounting

During automatic insertion of Relays, be sure to set the securing force of each claw to the following so that the Relay's characteristics will be maintained.



Dimension A: 1.96 N max.
Dimension B: 4.90 N max.
Dimension C: 1.96 N max.

Sub-miniature Relay (16 x 9.9 x 8.4 mm (L x W x H)) with DPDT Contact

- ROHS compliant.
- Unique moving-loop armature reduces relay size, magnetic interference and contact bounce time.
- Miniature permissible load: 0.01 mA 10 mVDC.
- Bifurcated gold-clad crossbar contact.
- International 2.54mm terminal pitch.
- Special models available for FCC Part 68 compliance.



Ordering Information

Classification		Single-side stable	Single-winding latching	Double-winding latching
DPDT	Fully sealed	G5A-234P	G5AU-234P	G5AK-234P

Note: When ordering, add the rated coil voltage to the model number.
Example: G5A-234P 12 VDC

Rated coil voltage

Model Number Legend

G5A - - VDC
1 2 3 4 5 6 7

1. Relay Function

None: Single-side stable
U: Single-winding latching
K: Double-winding latching

2. Contact Form

2: DPDT

3. Contact Type

3: Bifurcated crossbar Ag (Au-clad)

4. Enclosure Ratings

4: Fully sealed

5. Terminals

P: Straight PCB
C: Self-clinching PCB

6. Special Function

None: General-purpose
FC: FCC part 68 compliance
U: For ultrasonically cleanable

7. Rated Coil Voltage

3, 5, 6, 9, 12, 24, 48 VDC

Specifications

■ Coil Ratings

Single-side Stable Types

Rated voltage		3 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current		66.7 mA	40 mA	33.3 mA	22.2 mA	16.7 mA	8.3 mA	5.8 mA
Coil resistance		45 Ω	125 Ω	180 Ω	405 Ω	720 Ω	2,880 Ω	8,230 Ω
Coil inductance (H) (ref. value)	Armature OFF	0.048	0.13	0.17	0.43	0.71	2.76	7.44
	Armature ON	0.043	0.12	0.16	0.4	0.68	2.70	7.25
Must operate voltage		70% max. of rated voltage						
Must release voltage		10% min. of rated voltage						
Max. voltage		200% of rated voltage at 23°C						170% of rated voltage at 23°C
Power consumption		Approx. 200 mW						Approx. 280 mW

Single/Double-winding Latching Types

Rated voltage	3 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC
Rated current	66.7 mA	40 mA	33.3 mA	22.2 mA	16.7 mA	8.3 mA
Coil resistance	45 Ω	125 Ω	180 Ω	405 Ω	720 Ω	2,880 Ω
Coil inductance (H) (ref. value)	Armature OFF	0.02	0.06	0.08	0.17	1.1
	Armature ON	0.02	0.05	0.07	0.14	0.85
Must operate voltage	80% max. of rated voltage					
Must release voltage	80% min. of rated voltage					
Max. voltage	200% of rated voltage at 23°C					
Power consumption	Approx. 200 mW					

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of $\pm 10\%$.
2. Operating characteristics are measured at a coil temperature of 23°C.

■ Contact Ratings

Load	Resistive load ($\cos\varphi = 1$)	Inductive load ($\cos\varphi = 0.4$) (L/R = 7 ms)
Rated Load	0.5 A at 30 VAC; 1 A at 30 VDC	0.1 A at 30 VAC; 0.2 A at 30 VDC
Contact Material	Ag (Au-clad)	
Rated Carry Current	1 A	
Max. switching voltage	125 VAC, 125 VDC	
Max. switching current	1 A	0.5 A
Max. switching power	37.5 VA, 33 W	12.5 VA, 11 W
Failure rate (reference value)	0.01 mA at 10 mVDC	


Note: P level: $\lambda_{60} = 0.1 \times 10^{-6}$ /operation.

■ Characteristics


Contact resistance	50 mΩ max.
Operate (set) time	Single-side stable types: 5 ms max. (mean value: approx. 2.4 ms) Latching types: 5 ms max. (mean value: approx. 2 ms)
Release (reset) time	Single-side stable types: 5 ms max. (mean value: approx. 1.1 ms) Latching types: 5 ms max. (mean value: approx. 1.8 ms)
Bounce Time	Operate: Approx. 0.5 ms Release: Approx. 0.5 ms
Min. set/reset signal width	Latching type: 7 ms
Max. operating frequency	Mechanical: 36,000 operations/hr Electrical: 1,800 operations/hr (under rated load)
Insulation resistance	1,000 MΩ min. (at 500 VDC)
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between coil and contacts 1,000 VAC, 50/60 Hz for 1 min between contacts of different polarity 500 VAC, 50/60 Hz for 1 min between contacts of same polarity 100 VAC, 50/60 Hz for 1 min between set and reset coils (double-winding type only)
Impulse withstand voltage	1,500 V (10 x 160 μs) between contacts of same polarity (conforms to FCC Part 68)
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 0.75mm single amplitude (1.5mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 0.75mm single amplitude (1.5mm double amplitude)
Shock resistance	Destruction: 1,000 m/s ² (approx. 100G) Malfunction: 300 m/s ² (approx. 30G)
Endurance	Mechanical: 50,000,000 operations min. (at 36,000 operations/hr) Electrical: 100,000 operations min. (at 1,800 operations/hr)
Ambient temperature	Operating: -40°C to 70°C (with no icing)
Ambient humidity	Operating: 5% to 85%
Weight	Approx. 3 g

Engineering Data


Maximum Switching Power



Endurance



Ambient Temperature vs. Maximum Coil Voltage



Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

■ Approved Standards

UL114, UL478 (File No.E41515)/CSA C22.2 No.0, No.14 (File No.LR24825)



Model	Contact form	Coil ratings	Contact ratings
G5A-234P	DPDT	3 to 48 VDC	0.5 A, 60 VAC 0.5 A, 60 VDC 1 A, 30 VDC
G5AU-234P		3 to 24 VDC	
G5AK-234P			

Dimensions

Note: 1. All units are in millimetres unless otherwise indicated.


2. Orientation marks are indicated as follows:  

G5A-234P




*Average value

Terminal Arrangement/ Internal Connections (Bottom View)





Mounting Holes (Bottom View)

Tolerance: ± 0.1





Eight, 1-dia. holes

G5AU-234P





*Average value




Eight, 1-dia. holes


G5AK-234P



*Average value



S: Set coil
R: Reset coil



Ten, 1-dia. holes

Precautions

Long-term Continuously ON Contacts

Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. We recommend using a latching relay (magnetic-holding relay) in this kind of circuit. If a single-side stable model must be used in this kind of circuit, we recommend using a fail-safe circuit design that provides protection against contact failure or coil burnout.

Relay Handling

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

Miniature Relay for Signal Circuits

- ROHS compliant.
- Wide switching power of 10 μ A to 2 A.
- High dielectric strength coil-contacts:1,000 VAC; open contacts: 750 VAC.
- Conforms to FCC Part 68 requirements.
- Ag + Au clad bifurcated crossbar contacts and fully sealed for high contact reliability.
- New 150-mW relays with high-sensitivity.



Ordering Information

Classification	Contact form	Contact type	Contact material	Enclosure Rating	Model
Standard	DPDT	Bifurcated crossbar	Ag + Au-clad	Fully sealed	G5V-2
High-sensitivity					G5V-2-H1

Note: When ordering, add the rated coil voltage to the model number.

Example: G5V-2 12 VDC

Rated coil voltage

Model Number Legend

G5V - - VDC
 1 2 3

1. Contact Form

2: DPDT

2. Classification

H1: High-sensitivity

3. Rated Coil Voltage

3, 5, 6, 9, 12, 24, 48 VDC

Specifications

■ Coil Rating

Standard Models

Rated voltage	3 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current	166.7 mA	100 mA	83.3 mA	55.6 mA	41.7 mA	20.8 mA	12 mA
Coil resistance (W)	18 Ω	50 Ω	72 Ω	162 Ω	288 Ω	1,152 Ω	4,000 Ω
Coil inductance (H) (ref. value)	Armature OFF	0.04	0.09	0.16	0.31	0.47	1.98
	Armature ON	0.05	0.11	0.19	0.49	0.74	2.63
Must operate voltage	70% max. of rated voltage						
Must release voltage	5% min. of rated voltage						
Max. voltage	120% of rated voltage at 23°C						
Power consumption	Approx. 500 mW						Approx. 580 mW

High Sensitivity Models

Rated voltage	3 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current	50 mA	30 mA	25 mA	16.7 mA	12.5 mA	8.33 mA	6.25 mA
Contact material	Ag (Au-clad)						
Coil resistance	60 Ω	166.7 Ω	240 Ω	540 Ω	960 Ω	2,880 Ω	7,680 Ω
Coil inductance (H) (ref. value)	Armature OFF	0.18	0.46	0.70	1.67	2.90	20.1
	Armature ON	0.57	0.71	0.97	2.33	3.99	26.7
Must operate voltage	75% max. of rated voltage						
Must release voltage	5% min. of rated voltage						
Max. voltage	180% of rated voltage at 23°C						150% of rated voltage (at 23°C)
Power consumption	Approx. 150 mW					Approx. 200 mW	Approx. 580 mW

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
2. Operating characteristics are measured at a coil temperature of 23°C.

■ Contact Ratings

Item	Standard models	High sensitivity models
Load	Resistive load ($\cos\varphi = 1$)	
Rated load	0.5 A at 125 VAC; 2 A at 30 VDC	0.5 A at 125 VAC; 1 A at 24 VDC
Contact material	Ag (Au-clad)	
Rated carry current	2 A	
Max. switching voltage	125 VAC, 125 VDC	
Max. switching current	2 A	1 A
Max. switching power	62.5 VA, 60 W	62.5 VA, 24 W
Failure rate (reference value)	0.01 mA at 10 mVDC	

Note: P level: $\lambda_{60} = 0.1 \times 10^{-6}/\text{operation}$

■ Characteristics

Item	Standard models	High sensitivity models
Contact resistance	50 mΩ max.	100 mΩ max.
Operate time	7 ms max.	
Release time	3 ms max.	
Bounce Time	Operate: approx. 0.3 ms Release: approx. 1.5 ms	
Max. operating frequency	Mechanical: 36,000 operations/hr Electrical: 1,800 operations/hr (under rated load)	
Insulation resistance	1,000 MΩ min. (at 500 VDC)	
Dielectric strength	1,500 VAC, 50/60 Hz for 1 min between coil and contacts 1,000 VAC, 50/60 Hz for 1 min between contacts of different polarity 750 VAC, 50/60 Hz for 1 min between contacts of same polarity	1,000 VAC, 50/60 Hz for 1 min between coil and contacts 1,000 VAC, 50/60 Hz for 1 min between contacts of different polarity 500 VAC, 50/60 Hz for 1 min between contacts of same polarity
Impulse withstand voltage	1,500 V (10 x 160 μs) between coil and contacts (conforms to FCC part 68)	
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)	
Shock resistance	Destruction: 1,000 m/s ² (approx. 100G) Malfunction: 200 m/s ² (approx. 20G)	Destruction: 1,000 m/s ² (approx. 100G) Malfunction: 100 m/s ² (approx. 10G)
Endurance	Mechanical: 15,000,000 operations min. (at 36,000 operations/hr) Electrical: 100,000 operations min. (at 1,800 operations/hr)	
Ambient temperature	Operating: -25°C to 65°C (with no icing)	Operating: -25°C to 70°C (with no icing)
Ambient humidity	Operating: 5% to 85%	
Weight	Approx. 5 g	


■ Approved Standards

UL478, UL1950, UL508 (File No. E41515)/CSA C22.2 No.0, No.14 (File No. LR24825)


Contact form	Coil rating	Contact rating	
		G5V-2	G5V-2-H1
DPDT	3 to 48 VDC	0.6 A, 125 VAC (general use) 0.6 A, 110 VDC (resistive load) 2 A, 30 VDC (resistive load)	0.5 A, 125 VAC (general use) 0.2 A, 110 VDC (resistive load) 1 A, 24 VDC (resistive load)

Engineering Data


Maximum Switching Power
G5V-2



Endurance
G5V-2




Ambient Temperature vs.
Maximum Coil Voltage
G5V-2




Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.


G5V-2-H1



G5V-2-H1






G5V-2-H1



Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

Dimensions

- Note:** 1. All units are in millimetres unless otherwise indicated.
2. Orientation marks are indicated as follows:  

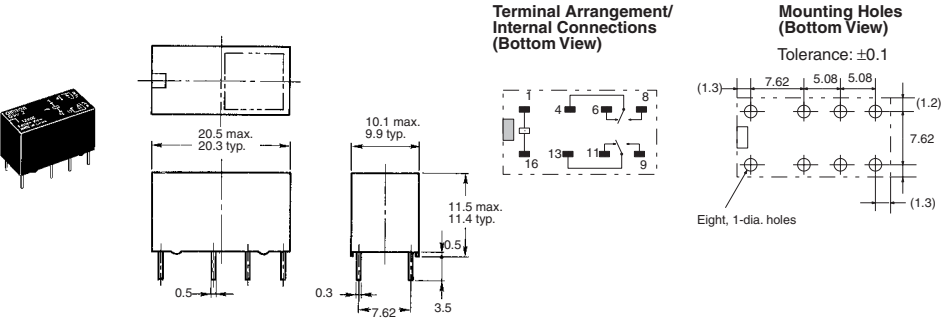

Precautions

Long-term Continuously ON Contacts

Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. Be sure to use a fail-safe circuit design that provides protection against contact failure or coil burnout.

Relay Handling

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

Fully sealed Relay with High Impulse Dielectric for Use in Telecommunications Equipment

- ROHS compliant.
- High sensitivity can be driven by digital circuits.
- Horizontal design allows use in ½ inch PCB racks.
- Impulse withstand voltage meets FCC Part 68 requirements.
- Relays can be mounted side-by-side due to low magnetic leakage.
- Single- and double-winding latching relays also available.
- Special models available for low thermoelectromotive force.



Ordering Information

Single-side Stable Type

Contact		Ag + Au-clad	AgPd + Au-clad
General purpose	DPDT	G6A-274P-ST-US	G6A-234P-ST-US
	4PDT	G6A-474P-ST-US	G6A-434P-ST-US
Low-sensitivity	DPDT	G6A-274P-ST40-US	G6A-234P-ST40-US
	4PDT	G6A-474P-ST40-US	G6A-434P-ST40-US

Single-winding Latching Type

Contact		Ag + Au-clad	AgPd + Au-clad
General purpose	DPDT	G6AU-274P-ST-US	G6AU-234P-ST-US
	4PDT	G6AU-474P-ST-US	G6AU-434P-ST-US

Double-winding Latching Type

Contact		Ag + Au-clad	AgPd + Au-clad
General purpose	DPDT	G6AK-274P-ST-US	G6AK-234P-ST-US
	4PDT	G6AK-474P-ST-US	G6AK-434P-ST-US
Low-sensitivity	DPDT	G6AK-274P-ST40-US	G6AK-234P-ST40-US
	4PDT	G6AK-474P-ST40-US	G6AK-434P-ST40-US

Note: When ordering, add the rated coil voltage to the model number.
Example: G6A-274P-ST-US 12 VDC

Rated coil voltage

Model Number Legend

G6A - - **VDC**
1 2 3 4 5 6 7 8 9

- | | | |
|---|---|--|
| <p>1. Relay Function
 None: Single-side stable
 U: Single-winding latching
 K: Double-winding latching</p> <p>2. Contact Form
 2: DPDT
 4: 4PDT</p> | <p>3. Contact Type
 7: Bifurcated crossbar
 Ag (Au-clad) contact
 3: Bifurcated crossbar
 AgPd (Au-clad) contact</p> <p>4. Enclosure Ratings
 4: Fully sealed</p> <p>5. Terminals
 P: Straight PCB</p> | <p>6. Stand-off
 ST: Stand-off 0.64 mm</p> <p>7. Special Function
 40: Low-sensitivity (400 mW)
 LT: Low thermoelectromotive force</p> <p>8. Approved Standards
 US: UL, CSA certified</p> <p>9. Rated Coil Voltage
 3, 4.5, 5, 6, 9, 12, 24, 48 VDC</p> |
|---|---|--|

Specifications

■ Coil Ratings

General-purpose, DPDT Relays

Rated voltage	3 VDC	4.5 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current	66.7 mA	44.6 mA	40 mA	33.3 mA	22.2 mA	16.7 mA	8.3 mA	4.9 mA
Coil resistance	45 Ω	101 Ω	125 Ω	180 Ω	405 Ω	720 Ω	2,880 Ω	9,750 Ω
Coil inductance	Armature OFF	0.07	0.16	0.2	0.29	0.63	1.1	4.5
(H) (ref. value)	Armature ON	0.065	0.14	0.18	0.26	0.57	1.06	12.5
Must operate voltage	70% max. of rated voltage							
Must release voltage	10% min. of rated voltage							
Max. voltage	200% of rated voltage at 23°C							
Power consumption	Approx. 200 mW						Approx. 235 mW	

General-purpose, 4PDT Relays

Rated voltage	3 VDC	4.5 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current	120 mA	79.9 mA	72.5 mA	60 mA	40 mA	30 mA	15 mA	7.5 mA
Coil resistance	25 Ω	56.3 Ω	69 Ω	100 Ω	225 Ω	400 Ω	1,600 Ω	6,400 Ω
Coil inductance	Armature OFF	0.05	0.11	0.14	0.2	0.45	0.8	3.2
(H) (ref. value)	Armature ON	0.045	0.095	0.12	0.17	0.38	0.68	2.7
Must operate voltage	70% max. of rated voltage							
Must release voltage	10% min. of rated voltage							
Max. voltage	150% of rated voltage at 23°C							
Power consumption	Approx. 360 mW							

Low-sensitivity DPDT Relays

Rated voltage	3 VDC	4.5 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current	133.3 mA	88.9 mA	80 mA	66.7 mA	44.3 mA	33.3 mA	16.7 mA	8.3 mA
Coil resistance	22.5 Ω	50.6 Ω	62.5 Ω	90 Ω	203 Ω	360 Ω	1,440 Ω	5,760 Ω
Coil inductance	Armature OFF	0.03	0.065	0.08	0.11	0.27	2.1	7.5
(H) (ref. value)	Armature ON	0.02	0.06	0.07	0.1	0.23	1.8	6.4
Must operate voltage	70% max. of rated voltage							
Must release voltage	10% min. of rated voltage							
Max. voltage	150% of rated voltage at 23°C							
Power consumption	Approx. 400 mW							

Low-sensitivity 4PDT Relays

Rated voltage	3 VDC	4.5 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current	133.3 mA	88.9 mA	80 mA	66.7 mA	44.3 mA	33.3 mA	16.7 mA	8.3 mA
Coil resistance	22.5 Ω	50.6 Ω	62.5 Ω	90 Ω	203 Ω	360 Ω	1,440 Ω	5,760 Ω
Coil inductance	Armature OFF	0.035	0.1	0.12	0.17	0.42	2.8	10.2
(H) (ref. value)	Armature ON	0.02	0.07	0.09	0.13	0.3	0.52	2.2
Must operate voltage	70% max. of rated voltage							
Must release voltage	10% min. of rated voltage							
Max. voltage	150% of rated voltage at 23°C							
Power consumption	Approx. 400 mW							

Single-winding Latching, DPDT Relays

Rated voltage		3 VDC	4.5 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current		33.7 mA	22.2 mA	20 mA	16.7 mA	11.1 mA	8.3 mA	4.2 mA	2.5 mA
Coil resistance		89 Ω	202 Ω	250 Ω	360 Ω	810 Ω	1,440 Ω	5,760 Ω	19,000 Ω
Coil inductance (H) (ref. value)	Armature OFF	0.15	0.34	0.44	0.64	1.38	2.5	9.2	28.5
	Armature ON	0.11	0.25	0.35	0.48	1.07	2	7.2	22
Must operate voltage		70% max. of rated voltage							
Must release voltage		70% max. of rated voltage							
Max. voltage		200% of rated voltage at 23°C							
Power consumption		Approx. 100 mW							Approx. 125 mW

Single-winding Latching, 4PDT Relays

Rated voltage		3 VDC	4.5 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current		106.8 mA	71.2 mA	64 mA	53.3 mA	35.6 mA	26.7 mA	13.3 mA	6.7 mA
Coil resistance		28.1 Ω	63.2 Ω	78.1 Ω	112.5 Ω	253 Ω	450 Ω	1,800 Ω	7,200 Ω
Coil inductance (H) (ref. value)	Armature OFF	0.03	0.06	0.08	0.11	0.25	0.45	1.8	7
	Armature ON	0.02	0.04	0.06	0.08	0.18	0.32	1.3	5.2
Must operate voltage		70% max. of rated voltage							
Must release voltage		70% max. of rated voltage							
Max. voltage		150% of rated voltage at 23°C							
Power consumption		Approx. 320 mW							

Double-winding Latching, DPDT Relays

Rated voltage			3 VDC	4.5 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current			66.7 mA	40.2 mA	36 mA	30 mA	20 mA	15 mA	7.5 mA	4.2 mA
Coil resistance			45 Ω	112 Ω	139 Ω	200 Ω	450 Ω	800 Ω	3,200 Ω	11,520 Ω
Coil inductance (H) (ref. value)	Set	Armature OFF	0.037	0.09	0.11	0.16	0.38	0.6	2.1	8.5
		Armature ON	0.027	0.065	0.08	0.12	0.28	0.45	1.5	6.3
	Reset	Armature OFF	0.027	0.065	0.08	0.12	0.28	0.45	1.5	6.3
		Armature On	0.037	0.09	0.11	0.16	0.38	0.6	2.1	8.5
Must operate voltage			70% max. of rated voltage							
Must release voltage			70% max. of rated voltage							
Max. voltage			200% of rated voltage at 23°C							
Power consumption			Approx. 200 mW	Approx. 180 mW						Approx. 200 mW

Double-winding Latching, 4PDT Relays

Rated voltage			3 VDC	4.5 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current			106.8 mA	71.2 mA	64 mA	53.3 mA	35.6 mA	26.7 mA	13.3 mA	6.7 mA
Coil resistance			28.1 Ω	63.2 Ω	78.1 Ω	112.5 Ω	253 Ω	450 Ω	1,800 Ω	7,200 Ω
Coil inductance (H) (ref. value)	Set	Armature OFF	0.03	0.06	0.08	0.11	0.25	0.45	1.8	7
		Armature ON	0.02	0.04	0.06	0.08	0.18	0.32	1.3	5.2
	Reset	Armature OFF	0.02	0.04	0.06	0.08	0.18	0.32	1.3	5.2
		Armature ON	0.03	0.06	0.08	0.11	0.25	0.45	1.8	7
Must operate voltage			70% max. of rated voltage							
Must release voltage			70% max. of rated voltage							
Max. voltage			150% of rated voltage at 23°C							
Power consumption			Approx. 320 mW							

PCB Signal Relay – G6A

Double-winding Latching, Low-sensitivity DPDT Relays

Rated voltage			3 VDC	4.5 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current			120 mA	79.9 mA	72.5 mA	60 mA	40 mA	30 mA	15 mA	7.5 mA
Coil resistance			25 Ω	56.3 Ω	69 Ω	100 Ω	225 Ω	400 Ω	1,600 Ω	6,400 Ω
(H) (ref. value)	Set	Armature OFF	0.015	0.04	0.05	0.07	0.16	0.28	1.1	4
		Armature ON	0.01	0.025	0.035	0.05	0.12	0.2	0.75	2.9
	Reset	Armature OFF	0.01	0.025	0.035	0.05	0.12	0.2	0.75	2.9
		Armature ON	0.015	0.04	0.05	0.07	0.16	0.28	1.1	4
Must operate voltage			70% max. of rated voltage							
Must release voltage			70% max. of rated voltage							
Max. voltage			150% of rated voltage at 23°C							
Power consumption			Approx. 360 mW							

Double-winding Latching, Low-sensitivity 4PDT Relays

Rated voltage			3 VDC	4.5 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC	48 VDC
Rated current			120 mA	79.9 mA	72.5 mA	60 mA	40 mA	30 mA	15 mA	7.5 mA
Coil resistance			25 Ω	56.3 Ω	69 Ω	100 Ω	225 Ω	400 Ω	1,600 Ω	6,400 Ω
Coil inductance (H) (ref. value)	Set	Armature OFF	0.02	0.045	0.065	0.09	0.18	0.3	1.2	4.4
		Armature ON	0.015	0.035	0.05	0.075	0.14	0.23	0.82	3.2
	Reset	Armature OFF	0.015	0.035	0.05	0.075	0.14	0.23	0.82	3.2
		Armature ON	0.02	0.045	0.065	0.09	0.18	0.3	1.2	4.4
Must operate voltage			70% max. of rated voltage							
Must release voltage			70% max. of rated voltage							
Max. voltage			150% of rated voltage at 23°C							
Power consumption			Approx. 360 mW							

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

2. Operating characteristics are measured at a coil temperature of 23°C.

■ Contact Ratings

Item	G6A-234P-ST(40)-US/434P-ST(40)-US		G6A-274P-ST(40)-US/474P-ST(40)-US	
Load	Resistive load (cosφ = 1)	Inductive load (cosφ = 0.4; L/R = 7 ms)	Resistive load (cosφ = 1)	Inductive load (cosφ = 0.4; L/R = 7 ms)
Rated Load	0.3 A at 125 VAC; 1 A at 30 VDC	0.2 A at 125 VAC; 0.5 A at 30 VDC	0.5 A at 125 VAC; 2 A at 30 VDC	0.3 A at 125 VAC; 1 A at 30 VDC
Contact Material	AgPd (Au-clad)		Ag (Au-clad)	
Rated Carry Current	3 A			
Max. switching voltage	250 VAC, 220 VDC			
Max. switching current	2 A	1 A	2 A	1 A
Max. switching power	125 VA, 60 W	62.5 VA, 30 W	125 VA, 60 W	62.5 VA, 30 W
Failure rate (reference value)	0.01 mA at 10 mVDC			

Item	G6AK-234P-ST(40)-US/G6AK-434P-ST(40)-US G6AU-234P-ST-US/G6AU-434P-ST-US		G6AK-274P-ST(40)-US/G6AK-474P-ST(40)-U G6AU-274P-ST-US/G6AU-474P-ST-US	
Load	Resistive load ($\cos\varphi = 1$)	Inductive load ($\cos\varphi = 0.4$; $L/R = 7$ ms)	Resistive load ($\cos\varphi = 1$)	Inductive load ($\cos\varphi = 0.4$; $L/R = 7$ ms)
Rated Load	0.3 A at 125 VAC; 1 A at 30 VDC	0.2 A at 125 VAC; 0.5 A at 30 VDC	0.5 A at 125 VAC; 2 A at 30 VDC	0.25 A at 125 VAC; 1 A at 30 VDC
Contact Material	AgPd (Au-clad)		Ag (Au-clad)	
Rated Carry Current	3 A		3 A	
Max. switching voltage	250 VAC, 220 VDC		250 VAC, 220 VDC	
Max. switching current	2 A	1 A	2 A	1 A
Max. switching power	125 VA, 60 W	62.5 VA, 30 W	125 VA, 60 W	62.5 VA, 30 W
Failure rate (reference value)	0.01 mA at 10 mVDC		0.01 mA at 10 mVDC	

Note: P level: $\lambda_{60} = 0.1 \times 10^{-6}$ /operation.
This value was measured at a switching frequency of 60 operations/min and the criterion of contact resistance is 50 Ω . This value may vary depending on the switching frequency and operating environment. Always double-check relay suitability under actual operating conditions.

■ Characteristics

Contact resistance	50 mΩ max.
Operate (set) time	Single-side stable types: DPDT: 5 ms max. (mean value: approx. 3 ms) 4PDT: 7 ms max. (mean value: approx. 3.8 ms) Latching types: DPDT: 5 ms max. (mean value: approx. 2.5 ms) 4PDT: 7 ms max. (mean value: approx. 3.3 ms)
Release (reset) time	Single-side stable types: DPDT: 3 ms max. (mean value: approx. 1.2 ms) 4PDT: 5 ms max. (mean value: approx. 1.3 ms) Latching types: DPDT: 5 ms max. (mean value: approx. 2.5 ms) 4PDT: 7 ms max. (mean value: approx. 2.7 ms)
Bounce Time	Operate: mean value: approx. 0.5 ms Release: mean value: approx. 0.5 ms
Min. set/reset signal width	DPDT: 7 ms min. 4PDT: 15 ms min.
Max. operating frequency	Mechanical: 36,000 operations/hr Electrical: 1,800 operations/hr (under rated load)
Insulation resistance	1,000 MΩ min. (at 500 VDC); except for set-reset
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between coil and contacts 1,000 VAC, 50/60 Hz for 1 min between contacts of different polarity 1,000 VAC, 50/60 Hz for 1 min between contacts of same polarity 250 VAC, 50/60 Hz for 1 min between set and reset coils
Impulse withstand voltage	1,500 V (10 x 160 μs) (conforms to FCC Part 68)
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 2.5-mm single amplitude (5-mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 1.65-mm single amplitude (3.3-mm double amplitude)
Shock resistance	Destruction: 1,000 m/s ² (approx. 100G) Malfunction: DPDT: 500 m/s ² (approx. 50G) 4PDT, Latching type: 300 m/s ² (approx. 30G)
Endurance	Mechanical: 100,000,000 operations min. (at 36,000 operations/hr) Electrical: 500,000 operations min. (at 1,800 operations/hr)
Ambient temperature	Operating: -40°C to 70°C (with no icing)
Ambient humidity	Operating: 5% to 85%
Weight	DPDT: Approx. 3.5 g 4PDT: Approx. 6 g


■ Approved Standards

UL114, UL478 (File No. E41515)/CSA C22.2 No.0, No.14 (File No. LR24825)


Model	Contact form	Coil ratings	Contact ratings
G6A-234P-ST(40)-US G6AK-234P-ST(40)-US G6AU-234P-ST-US	DPDT	3 to 48 VDC	0.6 A, 125 VAC 1 A, 30 VDC 0.6 A, 110 VDC
G6A-274P-ST(40)-US G6AK-274P-ST(40)-US G6AU-274P-ST-US	DPDT		0.6 A, 125 VAC 2 A, 30 VDC 0.6 A, 110 VDC
G6A-434P-ST(40)-US G6AK-434P-ST(40)-US G6AU-434P-ST-US	4PDT		0.6 A, 125 VAC 1 A, 30 VDC 0.6 A, 110 VDC
G6A-474P-ST(40)-US G6AK-474P-ST(40)-US G6AU-474P-ST-US	4PDT		0.6 A, 125 VAC 2 A, 30 VDC 0.6 A, 110 VDC

Engineering Data

Maximum Switching Power
DPDT, 4PDT




Ambient Temperature vs.
Maximum Coil Voltage




Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

Endurance
DPDT



4PDT





Dimensions

Note: 1. All units are in millimetres unless otherwise indicated.


2. Orientation marks are indicated as follows:  

G6A-234P-ST(40)-US, G6A-274P-ST(40)-US




*Average value

Terminal Arrangement/ Internal Connections (Bottom View)





Mounting Holes (Bottom View)

Tolerance: ± 0.1




Eight, 1.0-dia. holes

G6A-434P-ST(40)-US, G6A-474P-ST-US

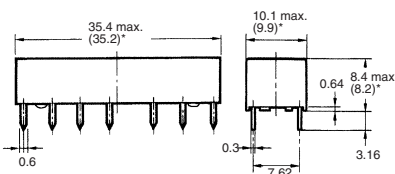


*Average value

Terminal Arrangement/ Internal Connections (Bottom View)





Mounting Holes (Bottom View)

Tolerance: ± 0.1

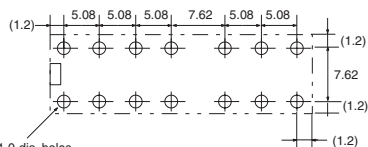


Fourteen, 1.0-dia. holes

G6AK-234P-ST(40)-US, G6AK-274P-ST(40)-US




*Average value

Terminal Arrangement/ Internal Connections (Bottom View)





Mounting Holes (Bottom View)

Tolerance: ± 0.1




Ten, 1-dia. holes

**G6AK-434P-ST(40)-US,
G6AK-474P-ST(40)-US**

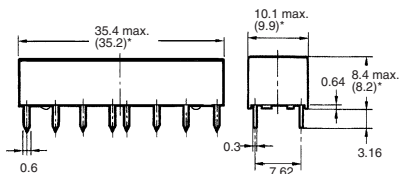


*Average value

**Terminal Arrangement/
Internal Connections
(Bottom View)**





**Mounting Holes
(Bottom View)**

Tolerance: ± 0.1




**G6AU-234P-ST-US,
G6AU-274P-ST-US**




*Average value

**Terminal Arrangement/
Internal Connections
(Bottom View)**





**Mounting Holes
(Bottom View)**

Tolerance: ± 0.1




**G6AU-434P-ST-US,
G6AU-474P-ST-US**

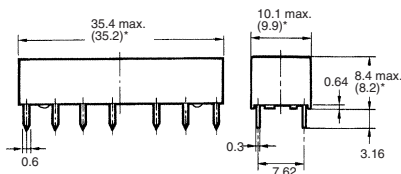


*Average value

**Terminal Arrangement/
Internal Connections
(Bottom View)**



**Mounting Holes
(Bottom View)**

Tolerance: ± 0.1

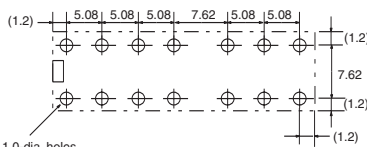

Precautions

Long-term Continuously ON Contacts


Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. We recommend using a latching relay (magnetic-holding relay) in this kind of circuit. If a single-side stable model must be used in this kind of circuit, we recommend using a fail-safe circuit design that provides protection against contact failure or coil burnout.

Relay Handling

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

Switching Structure Based on the Micro Strip Line is Used to Combine High Performance and Cost-effectiveness

- ROHS compliant.
- Isolation characteristics of 65 dB or better at 900 MHz.
- Effective insertion loss characteristics of 0.2 dB or better at 900 MHz (half the loss of earlier models).
- Fully sealed construction provides excellent environmental resistance.
- Improved shock-resistance (double the resistance of earlier models).

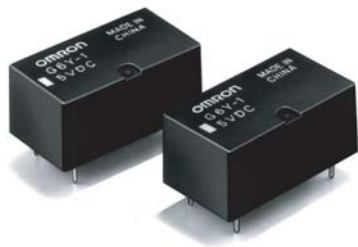

Ordering Information

Class	Sealing	Fully sealed	
	Contact configuration	Rated coil voltage	Model
Basic Type	SPDT	4.5 VDC	G6Y-1
		5 VDC	
		9 VDC	
		12 VDC	
		24 VDC	

Model Number Legend

G6Y-@@ VDC

1 2

1. Number of contact poles

1: Single pole (SPDT contact)

2. Rated Coil Voltage

4.5, 5, 9, 12, 24 VDC

Basic Specifications

- Contact Mechanism: Double-braking bifurcated contact
- Contact Material: Gold alloy

- Sealing: Fully sealed
- Terminal Configuration: Printed circuit board terminal configuration

Application Examples

Signal Switching in Various Communications Equipment

- Wired Communications: Cable TV, captain systems, and video response systems (VRS)
- Wireless Communications: Transceivers, ham radio, car telephones, high-level TV, fax machines, satellite broadcasting, text multiplex broadcasting, and pay TV
- Public Equipment: VCRs, TVs, video disk players, and TV games
- Industrial Equipment: Measuring equipment, test equipment, and multiplex transmission devices

■ Ratings

Operational Coil

Class	Item	Rated voltage (V)	Rated current (mA)	Coil resistance (Ω)	Operating voltage (V)	Release voltage (V)	Max. allowed voltage (V)	Power consumption (mW)
Basic Type	DC	4.5	44.4	101	75% max.	10% min.	150% of rated voltage at 23°C	Approx. 200
		5	40.0	125				
		9	22.2	405				
		12	16.7	720				
		24	8.3	2,880				

Note: The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

The operating characteristics are measured at a coil temperature of 23°C.

The “Max. allowed voltage” is the maximum voltage that can be applied to the relay coil. It is not the maximum voltage that can be applied continuously.

Contact Ratings

Load	Resistive load
Rated voltage	0.01 A at 30 VAC 0.01 A at 30 VDC 900 MHz, 1 W (see note)
Contact material	Au
Rated carry current	0.5 A
Max. switching voltage	30 VAC 30 VDC
Max. switching current	0.5 A
Max. switching power (reference value)	AC10VA DC10W

Note: This value is for a load with V.SWR x 1.2.

High-frequency Characteristics

Item	250 MHz	900 MHz	2.5 GHz
Isolation	80 db min.	65 dB min.	30 dB min.
Insertion loss	0.5 dB max.	0.5 dB max.	–
V.SWR	1.5 max.	1.5 max.	–
Max. carry power	10 W		–
Max. switching power	10 W (see note 3)		–

Note: 1. The impedance of the measuring system is 50 Ω.

2. The table above shows preliminary values.

3. This value is for a load with V.SWR x 1.2

■ Characteristics

Contact resistance (see note 1)	100 mΩ max.
Operating time	10 ms max. (approx. 5 ms)
Release time	5 ms max. (approx. 1 ms)
Insulation resistance (see note 2)	100 mΩ min.
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between coil and contacts 500 VAC, 50/60 Hz for 1 min between contacts of same polarity 500 VAC, 50/60 Hz for 1 min between coil and ground and between contacts and ground
Vibration resistance	Destruction: 10 Hz to 55 to 10 Hz, 0.75-mm single amplitude (1.5 mm double amplitude) Malfunction: 10 Hz to 55 to 10 Hz, 0.75-mm single amplitude (1.5 mm double amplitude)
Shock resistance	Destruction: 1,000 m/s ² Malfunction: 500 m/s ²
Endurance	Mechanical: 1,000,000 operations min. (at 1,800 operations/hr) Electrical: 300,000 operations min. (under rated load at 1,800 operations/hr)
Failure rate (reference value (see note 3))	10 mVDC, 10 μA
Ambient temperature	Operating: -40°C to 70°C (with no icing)
Ambient humidity	Operating: 5% to 85%
Weight	Approx. 5 g

Note: The table above shows preliminary values.


1. Measurement Conditions: 5 VDC, 100 mA, voltage drop method

2. Measurement Conditions: Measured at the same points as the dielectric strength using a 500-VDC ohmmeter.

3. This value is for a switching frequency of 120 operations/minute.


Engineering Data

Ambient Temperature vs. Maximum Coil Voltage



Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.


Malfunctioning Shock




Quantity Tested: 10 Units
Test Method: Shock was applied 3 times in each direction with and without excitation and the level at which the shock caused malfunction was measured.

Rating: 500 m/s^2

Contact Reliability Test (See Note)




Note: Ambient temperature of 23°C

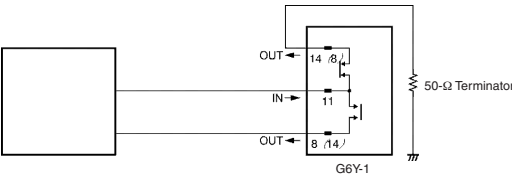


Terminals which were not being measured were terminated with 50 Ω .

Note: The high-frequency characteristics data were measured using a dedicated circuit board and actual values will vary depending on the usage conditions. Check the characteristics of the actual equipment being used.


Isolation Characteristics (Average Values) (See notes 1 and 2.)





Insertion Loss Characteristics (Average Values) (See notes 1 and 2.)



V.SWR, Return Loss Characteristics (Average Values) (See notes 1 and 2.)



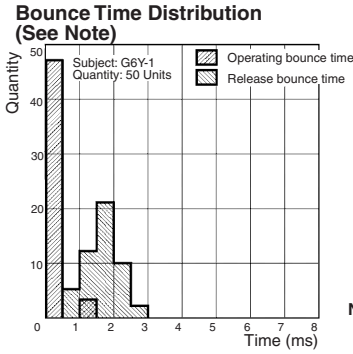
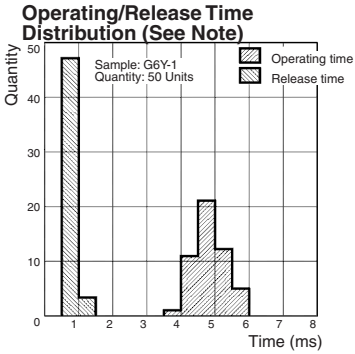


Note: Ambient temperature: 23°C

Dimensions


Note: All units are in millimetres unless otherwise indicated.

G6Y-1




PCB Dimensions (Bottom View)

Tolerances: ± 0.1 mm.



Terminal Arrangement/ Internal Connections (Bottom View)



(There is no polarity to the coil.)


Note: The shaded and unshaded parts indicate the product's directional marks.

■ Correct Use

Airtightness when cleaning will last 1 minute at 70°C. Complete cleaning within these conditions.

MICRO STRIP LINE DESIGN

- It is advantageous to use the Micro Strip Line in high-frequency transmission circuits because a low-loss transmission can be constructed with this method. By etching the dielectric base which has copper foil attached to both sides, the Micro Strip Line will have a concentrated electric field between the lines and ground as shown in the following diagram.



- The characteristic impedance of the lines Z_0 is determined by the kind of base (dielectric constant), the base's thickness, and the width of the lines, as expressed in the following equation.

$$Z_0 = \frac{377}{\sqrt{\epsilon_r} \frac{W}{H} \left\{ 1 + \frac{2H}{\pi W} \left[1 + \ln \frac{\pi W}{H} \right] \right\}}$$


W: Line width

ϵ_r : Effective dielectric constant

H: Dielectric base thickness


The copper foil thickness must be less than H.

- The following graph shows this relationship.

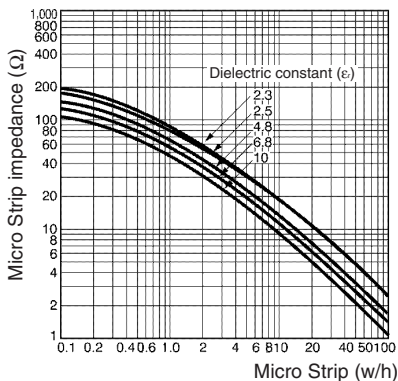

- For example, when creating 50 Ω lines using a glass epoxy base with a thickness of 1.6 mm, the above graph will yield a w/h ratio of 1.7 for a dielectric constant of 4.8. Since the base thickness is 1.6 mm, the width will be $h \propto 1.7 \approx 2.7$ mm.
- The thickness of the copper foil "t" is ignored in this design method, but it must be considered because large errors will occur in extreme cases such as a foil thickness of $t \approx w$. Furthermore, with the Micro Strip Line design, the lines are too short for the G6Y's intended frequency bandwidths, so we can ignore conductive losses and the line's attenuation constant.
- The spacing of the Strip Lines and ground pattern should be comparable to the width of the Strip Lines.
- Design the pattern with the shortest possible distances. Excessive distances will adversely effect the high-frequency characteristics.
- Spread the ground patterns as widely as possible so that potential differences are unlikely to develop between the ground patterns.
- To avoid potential short-circuits, do not place the pattern's leads near the point where the bottom of the Relay attaches to the board.

BENDING THE MICRO STRIP LINE



When the lines must curve, an elbow can be used as shown in the diagram. A distance (D) between the lines of approximately twice the line width is sufficient.

EXAMPLES OF MOUNTING DESIGNS

Since this example emphasizes reducing mounting costs, expensive mounting methods such as through-hole boards are not shown. If such methods are to be used, the characteristics must be studied carefully using the actual board configuration.

Using a Double-sided Paper Epoxy Board


When double-sided paper epoxy boards are used, the dielectric constant will be approximately the same as that of glass epoxy boards ($\epsilon_r = 4.8$).

The width of the Strip Lines for a board with $t=1.6$ mm is 2.7 mm for 50 Ω and 1.3 mm for 75 Ω . For a board with $t=1.0$ mm the width is 1.7 mm for 50 Ω and 0.8 mm for 75 Ω .

The following diagram shows an example pattern and the Micro Strip Lines connected to the contact terminals are formed with pattern widths derived from the description above. The width between the Micro Strip Lines and ground patterns are comparable to the Micro Strip Line width.


There are jumpers between the upper and lower patterns at the points marked with Xs in the diagram. Improved characteristics can be obtained with more jumper locations. This method yields isolation characteristics of 65 dB to 75 dB at 500 MHz and 50 dB at 900 MHz.

At this point in the diagram the component side is the entire ground pattern side, but set aside approximately 2.0 mm \times 2.0 mm of the pattern for the contact terminals and coil terminals.



Using a Single-sided Board

When a single-sided board is used, isolation characteristics of only 60 dB to 70 dB at 200 MHz can be obtained. When high frequency bands are to be used with a single-sided board, a metal plate can be placed between the base and Relay and connected to the ground pattern.

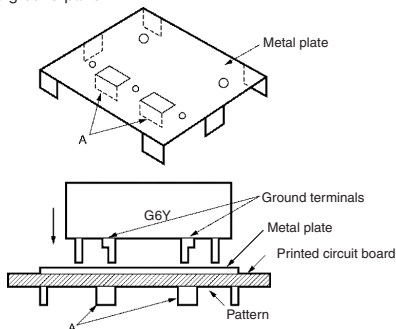

With this method a metal plate is placed between the Relay and base and connected to the pattern, as shown in the above diagram. The important point here is that 3 locations (the G6Y's ground terminal, the metal plate's bent tabs (A), and the ground pattern) are soldered together at the same time. This method combines an inexpensive single-sided board and inexpensive metal plate to yield the same characteristics as a double-sided board and good characteristics are obtained by grounding the G6Y's ground terminal and metal plate in the same place.

The metal plate must be attached to the base as described here. From this point, the methods used for Strip Line design are the same as for the double-sided board.

Mounting Precautions


Be sure to securely attach the Relay's base surface to the board during installation. The isolation characteristics will be affected if the Relay lifts off the board.

As shown in the enlarged illustration of the cross-section of part A, the G6Y is designed to ensure better high-frequency characteristics if the stand-off part of the G6Y is in contact with the ground pattern of the PCB. Therefore, the ground terminal and stand-off part are electrically connected internally.


Should the through hole electrically connected to the contact terminal come in contact with the stand-off part, the contact will be short-circuited with the ground, which may cause an accident. As a preventive measure, keep at least a distance of 0.3 mm between the stand-off part and the through hole or land.

For example, if the terminal hole on the PCB is 1 mm in diameter and the length B shown in the illustration is 1.4 mm, a distance of 0.3 mm or more will be provided between the through hole and stand-off part.

PCB Mounting




Cross-section of Part A



Surface-mounting, 1-GHz-Band,
Miniature, DPDT, High-frequency
Relay

- ROHS compliant.
- Superior high-frequency characteristics (at 1 GHz), such as an isolation of 20 dB min. between contacts of the same polarity or 30 dB min. between contacts of different polarity with an insertion loss of 0.2 dB max.
- Miniaturized to 10.3 x 6.9 x 5.4 mm (L x W x H).
- Rated power consumption of 100 mW with high sensitivity.
- Single-side stable and single-winding latching models available.

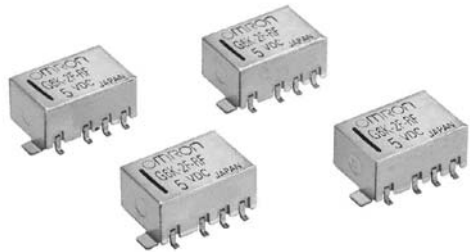

Ordering Information

Model Number Legend

G6K□-□□-□□
1 2 3 4

1. Relay Function

None: Single-side stable
U: Single-winding latching

2. Classification

2: DPDT

3. Terminal Shape

F: Surface-mounting terminals

4. Special Function

RF: High-frequency compatible

■ List of Models

Standard Models with Surface-mounting Terminals

Classification	Structure	Contact form	Rated coil voltage	Model
Single-side stable	Plastic sealed	DPDT	3, 4.5, 5, 12, and 24 VDC	G6K-2F-RF
Single-winding latching			3, 4.5, 5, 12, and 24 VDC	G6KU-2F-RF

Application Examples

- Measurement devices
- Communications devices
- Broadcasting and audio-visual devices

Specifications

■ Contact Ratings

Load	Resistive load
Rated load	125 VAC, 0.3 A 30 VDC, 1 A 1 GHz, 1 W (see note.)
Contact Material	Au (au alloy)
Rated carry current	1 A
Max. switching voltage	125 VAC or 50 VDC
Max. switching current	1 A

Note: This value is for V.SWR of 1.2 max. at the load.

■ High-frequency Characteristics

Frequency		1 GHz
Item		
Isolation	Between contacts of the same polarity	20 dB min.
	Between contacts of different polarity	30 dB min.
Insertion loss		0.2 dB max.
V.SWR		1.2 max.
Maximum carry power		3 W (See note 3.)
Maximum switching power		1 W (See note 3.)

- Note:
1. The impedance of the measurement system is 50 Ω.
 2. The above values are initial values.
 3. These values are for a V.SWR of 1.2 max. at the load.

■ Characteristics

Item		Single-side stable models	Single-winding latching models
		G6KU-2F-RF	G6KU-2F-RF
Contact resistance (See note 2.)		100 mΩ max.	
Operating (set) time (See note 3.)		3 ms max. (approx. 1.4 ms)	3 ms max. (approx. 1.2 ms)
Release (reset) time (See note 3.)		3 ms max. (approx. 1.3 ms)	3 ms max. (approx. 1.2 ms)
Minimum set/reset pulse time		---	10 ms
Insulation resistance (See note 4.)		1,000 MΩ min. (at 500 VDC)	
Dielectric strength	Between coil and contacts	750 VAC, 50/60 Hz for 1 min	
	Between contacts of different polarity	750 VAC, 50/60 Hz for 1 min	
	Between contacts of the same polarity	750 VAC, 50/60 Hz for 1 min	
	Between ground and coil/contacts	500 VAC, 50/60 Hz for 1 min	
Vibration resistance		Destruction: 10 to 55 to 10 Hz, 2.5-mm single amplitude (5-mm double amplitude) and 55 to 500 to 55 Hz, 300 m/s ² Malfunction: 10 to 55 to 10 Hz, 1.65-mm single amplitude (3.3-mm double amplitude) and 55 to 500 to 55 Hz, 200 m/s ²	
Shock resistance		Destruction: 1,000 m/s ² Malfunction: 750 m/s ²	
Endurance		Mechanical: 50,000,000 operations min. (at a switching frequency of 36,000 operations/hour) Electrical: 100,000 operations min. (at a switching frequency of 1,800 operations/hour)	
Ambient temperature		Operating: -40°C to 70°C (with no icing or condensation)	
Ambient humidity		Operating: 5% to 85%	
Weight		Approx. 0.95 g	

- Note:
1. The above values are initial values.
 2. The contact resistance was measured with 10 mA at 1 VDC with a voltage drop method.
 3. Values in parentheses are actual values.
 4. The insulation resistance was measured with a 500-VDC megohmmeter applied to the same parts as those used for checking the dielectric strength.

■ Coil Ratings

Single-side Stable Models

G6K-2F-RF

Rated voltage (VDC)	3	4.5	5	12	24
Rated current (mA)	33.0	23.2	21.1	9.1	4.6
Coil resistance (Ω)	91	194	237	1,315	5,220
Must operate voltage (V)	80% max. of rated voltage				
Must release voltage (V)	10% min. of rated voltage				
Maximum voltage (V)	150% of rated voltage				
Power consumption (mW)	Approx. 100 mW				


Single-winding Latching Models

G6KU-2F-RF


Rated voltage (VDC)	3	4.5	5	12	24
Rated current (mA)	33.0	23.2	21.1	9.1	4.6
Coil resistance (Ω)	91	194	237	1,315	5,220
Must operate voltage (V)	75% max. of rated voltage				
Must release voltage (V)	75% max. of rated voltage				
Maximum voltage (V)	150% of rated voltage				
Power consumption (mW)	Approx. 100 mW				

- Note:
1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
 2. The operating characteristics are measured at a coil temperature of 23°C.
 3. The maximum voltage is the highest voltage that can be imposed on the Relay coil instantaneously.


Engineering Data

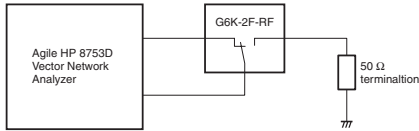


High-frequency Characteristics (Isolation) (See notes 1 and 2.)



High-frequency Characteristics (Insertion Loss) (See notes 1 and 2.)



High-frequency Characteristics (Return Loss V.SWR) (See notes 1 and 2.)

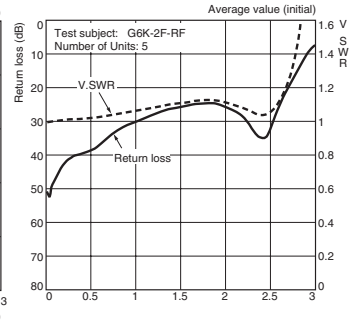

Note: Refer to the G6K specifications for basic specifications not shown above.


Note: 1. These tests were conducted at an ambient temperature of 23°C.

2. High-frequency characteristics depend on the PCB to which the Relay is mounted. Always check these characteristics, including endurance, in the actual machine before use.


Dimensions

Note: All units are in millimetres unless otherwise indicated.


G6K-2F-RF G6KU-2F-RF



Mounting Dimensions (Top View) Tolerance: ±0.1 mm

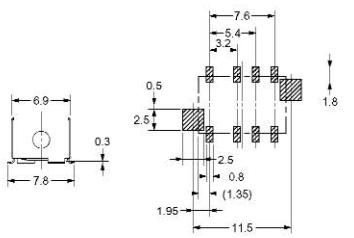


Terminal Arrangement/Internal Connections (Top View)



- Note: 1.** Each value has a tolerance of ±0.3 mm.
2. The coplanarity of the terminals is 0.15 mm max.

Recommended Soldering Method

Recommended Conditions for IRS Method (Surface-mounting Terminals)

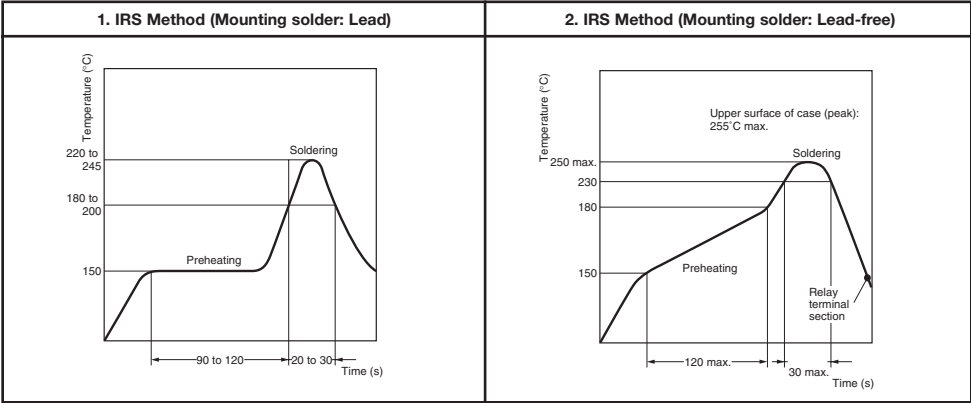


Note: Do not submerge the relay in a solder bath. Doing so will deform the resin causing faulty operation.

Note: The temperature profile indicates the temperature on the circuit board surface.


The thickness of cream solder to be applied should be between 200 and 250 μm and the land pattern should be based on OMRON's recommended PCB pattern.

To maintain the correct soldering joint shown in the following diagram, we recommend applying solder with the soldering conditions shown on the left.

Correct Soldering



Incorrect Soldering



Check the soldering in the actual mounting conditions before use.

Safety Precautions

■ Precautions for Correct Use

Handling

Use the Relay as soon as possible after opening the moisture-proof package. If the Relay is left for a long time after opening the moisture-proof package, the appearance may suffer and seal failure may occur after the solder mounting process. To store the Relay after opening the moisture-proof package, place it into the original package and sealed the package with adhesive tape.

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

Environmental Conditions for Usage, Storage, and Transport

Avoid direct sunlight when using, storing, or transporting the Relay and maintain normal temperature, humidity, and pressure conditions.


Long-term Continuously ON Contacts

Using the Relay in a circuit where the Relay will be ON continuously for long periods (rather than switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation and can cause a film to develop on the contact surfaces. We recommend using a latching relay

(magnetic-holding relay) in this kind of circuit. If a single-side stable model must be used in this kind of circuit, we recommend adding fail-safe circuits in case the contact fails or the coil burns out.

Claw Securing Force During Automatic Mounting

During automatic insertion of Relays, be sure to set the securing force of each claw to the following so that the Relay's characteristics will be maintained.



Direction A: 1.96 N max.
Direction B: 4.90 N max.
Direction C: 1.96 N max.

Secure the claws to the shaded area.


Do not attach them to the center of the Relay or just one part of the Relay.

Coating

Do not use silicone coating to coat the Relay when it is mounted to the PCB. Do not wash the PCB after the Relay is mounted using detergent containing silicone. Otherwise, the detergent may remain on the surface of the Relay.

Surface-mounting, 2.6-GHz-Band, Miniature, SPDT, High-frequency Relay

- ROHS compliant.
- Superior high-frequency characteristics, such as an isolation of 30 dB min., insertion loss of 0.5 dB max., and V.SWR of 1.5 max. at 2.6 GHz.
- Surface-mounting terminals and superior high frequency characteristics combined using semi triplate strip transmission lines.
- Miniature dimensions of 20 x 8.6 x 8.9 mm (L x W x H).
- Choose from a lineup that includes single-winding latching models (200 mW), double-winding latching models (360 mW), and models with a reverse contact arrangement.
- Series includes models with an E-shape terminal structure (same as existing models), and models with a Y-shape terminal structure, allowing greater freedom with PCB design.
- Models with 75-Ω impedance and models with 50-Ω impedance are available.

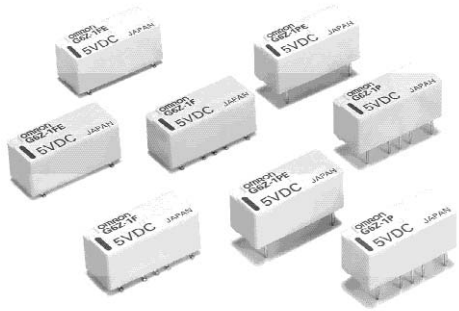

Ordering Information

Model Number Legend

G6Z-

1 2 3 4 5 6

1. Relay Function

None: Single-side stable
U: Single-winding latching
K: Double-winding latching

2. Contact Form

1: SPDT

3. Terminal Shape

F: Surface-mounting terminals
P: PCB terminals

4. Terminal Structure

None: Y-shape terminal structure
E: E-shape terminal structure

5. Characteristic Impedance

None: 75 Ω
A: 50 Ω

6. Contact Arrangement

None: Standard contact arrangement
R: Reverse contact arrangement

■ List of Models

Standard Models with PCB Terminals

Classification	Structure	Contact form	Terminal arrangement	Characteristic impedance	Rated coil voltage	Model		
Single-side stable	Plastic sealed	SPDT	E-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6Z-1PE		
				50 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6Z-1PE-A		
			Y-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6Z-1P		
				50 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6Z-1P-A		
Single-winding latching			Plastic sealed	E-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZU-1PE	
					50 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZU-1PE-A	
				Y-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZU-1P	
					50 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZU-1P-A	
Double-winding latching				Plastic sealed	E-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZK-1PE
						50 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZK-1PE-A
					Y-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZK-1P
						50 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZK-1P-A

Standard Models with Surface-mounting Terminals

Classification	Structure	Contact form	Terminal arrangement	Characteristic impedance	Rated coil voltage	Model
Single-side stable	Plastic sealed	SPDT	E-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6Z-1FE
				50 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6Z-1FE-A
			Y-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6Z-1F
				50 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6Z-1F-A
Single-winding latching			E-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZU-1FE
				50 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZU-1FE-A
			Y-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZU-1F
				50 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZU-1F-A
Double-winding latching	E-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZK-1FE		
		50 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZK-1FE-A		
	Y-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZK-1F		
		50 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZK-1F-A		

Note: When ordering tape packing (surface-mounting models), add “-TR” to the model number. “-TR” does not appear on the Relay itself.

Application Examples

These Relays can be used for switching signals in media equipment.

- **Wire communications:**

Cable TV (STB and broadcasting infrastructure), cable modems, and VRS (video response systems)

- **Wireless communications:**

Transceivers, ham radios, car telephones, ETC, ITS, high-level TV, satellite broadcasting, text multiplex broadcasting, pay TV, mobile phone stations, TV broadcasting facilities, and community antenna systems

- **Public equipment:**

TVs, TV games, satellite radio units, car navigation systems

- **Industrial equipment:**

Measuring equipment, test equipment, and multiplex transmission devices

Specifications

■ Contact Ratings

Lead	Recistive load
Rated load	10 mA at 30 VAC; 10 mA at 30 VDC; 10 W at 900 MHz (See note.)
Contact material	Au-clad (Cu alloy)
Rated carry current	0.5 A
Max. switching voltage	30 VDC, 30 VAC
Max. switching current	0.5 A

Note: This value is for impedance of 50 Ω or 75 Ω with a V.SWR of 1.2max.

■ High-frequency Characteristics

Frequency		900 MHz				2.6 GHz			
		TH		SMD		TH		SMD	
		E-shape	Y-shape	E-shape	Y-shape	E-shape	Y-shape	E-shape	Y-shape
Isolation	75 Ω	65 dB min.		60 dB min.		35 dB min.	45 dB min.	30 dB min.	40 dB min.
	50 Ω	60 dB min.							
Insertion loss (not including substrate loss)	75 Ω	0.2 dB max.				0.5 dB max.			
	50 Ω	0.1 dB max.				0.3 dB max.			
V.SWR	75 Ω	1.2 max.				1.5 max.			
	50 Ω	1.1 max.				1.3 max.			
Return loss	75 Ω	20.8 dB max.				14.0 dB max.			
	50 Ω	26.4 dB max.				17.7 dB max.			
Maximum carry power		10 W (See note 2.)							
Maximum switching power		10 W (See note 2.)							

- Note:** 1. The above values are initial values.
2. These values are for an impedance of 50 Ω or 75 Ω with a V.SWR of 1.2 max.

■ Coil Ratings

Single-side Stable Models

G6Z-1P(E), G6Z-1F(E)

Raged voltage	3 VDC	4.5 VDC	5 VDC	9 VDC	12 VDC	24 VDC
Rated current	66.7 mA	44.4 mA	40.0 mA	22.2 mA	16.7 mA	8.3 mA
Coil resistance	45 Ω	101 Ω	125 Ω	405 Ω	720 Ω	2,880 Ω
Must operate voltage	75% max. of rated voltage					
Must release voltage	10% min. of rated voltage					
Maximum voltage	150% of rated voltage					
Power consumption	Approx. 200 mW					

Single-winding Latching Models

G6ZU-1P(E), G6ZU-1F(E)

Raged voltage	3 VDC	4.5 VDC	5 VDC	9 VDC	12 VDC	24 VDC
Rated current	66.7 mA	44.4 mA	40.0 mA	22.2 mA	16.7 mA	8.3 mA
Coil resistance	45 Ω	101 Ω	125 Ω	405 Ω	720 Ω	2,880 Ω
Must operate voltage	75% max. of rated voltage					
Must release voltage	75% max. of rated voltage					
Maximum voltage	150% of rated voltage					
Power consumption	Approx. 200 mW					

Double-winding Latching Models

G6ZK-1P(E), G6ZK-1F(E)

Raged voltage	3 VDC	4.5 VDC	5 VDC	9 VDC	12 VDC	24 VDC
Rated current	120 mA	80 mA	72 mA	40 mA	30 mA	15 mA
Coil resistance	25 Ω	56 Ω	69 Ω	225 Ω	400 Ω	1,600 Ω
Must operate voltage	75% max. of rated voltage					
Must release voltage	75% max. of rated voltage					
Maximum voltage	150% of rated voltage					
Power consumption	Approx. 360 mW					

- Note:**
1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
 2. The operating characteristics are measured at a coil temperature of 23°C.
 3. The maximum voltage is the highest voltage that can be imposed on the Relay coil instantaneously.

■ Characteristics

Item		Single-side stable models	Single-winding latching models	Double-winding latching models
		G6Z-1P(E), G6Z-1F(E)	G6ZU-1P(E), G6ZU-1F(E)	G6ZK-1P(E), G6ZK-1F(E)
Contact resistance (See note 2.)		100 mΩ max.		
Operating (set) time (See note 3.)		10 ms max. (approx. 3.5 ms)	10 ms max. (approx. 2.5 ms)	
Release (reset) time (See note 3.)		10 ms max. (approx. 2.5 ms)		
Minimum set/reset pulse time		---	12 ms	
Insulation resistance (See note 4.)		100 MΩ min. (at 500 VDC)		
Dielectric strength	Coil and contacts	1,000 VAC, 50/60 Hz for 1 min		
	Coil and ground, contacts and ground	500 VAC, 50/60 Hz for 1 min		
	Contacts of same polarity	500 VAC, 50/60 Hz for 1 min		
Vibration resistance		Destruction: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)		
Shock resistance		Destruction: 1,000 m/s ² Malfunction: 500 m/s ²		
Endurance		Mechanical: 1,000,000 operations min. (at 36,000 operations/hour) Electrical: 300,000 operations min. (30 VAC, 10 mA/30 VDC, 10 mA), 100,000 operations min. (900 MHz, 10 W) at a switching frequency of 1,800 operations/hour		
Ambient temperature		Operating: -40°C to 70°C (with no icing or condensation)		
Ambient humidity		Operating: 5% to 85%		
Weight		Approx. 2.8 g		

Note: 1. The above values are initial values.


2. The contact resistance was measured with 10 mA at 1 VDC with a voltage drop method.

3. Values in parentheses are actual values.


4. The insulation resistance was measured with a 500-VDC megohmmeter applied to the same parts as those used for checking the dielectric strength.

Engineering Data


Ambient Temperature vs. Maximum Voltage




Ambient Temperature vs. Must Operate or Must Release Voltage




Shock Malfunction

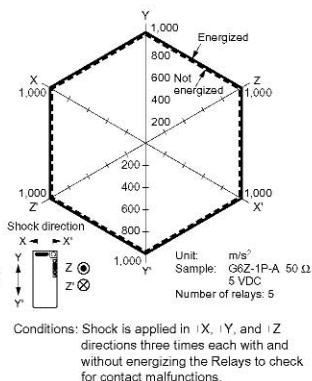


Electrical Endurance (with Must Operate and Must Release Voltage)




Electrical Endurance (with Must Operate and Must Release Voltage)






Electrical Endurance (Contact Resistance)



Electrical Endurance (Contact Resistance)




External Magnetic Interference




Surface-Mounting High-Frequency Relay – G6Z


High-frequency Characteristics at 75 Ω (Isolation)




High-frequency Characteristics at 75 Ω (Insertion Loss)




High-frequency Characteristics at 75 Ω (Return Loss, V.SWR)




High-frequency Characteristics at 50 Ω (Isolation)




High-frequency Characteristics at 50 Ω (Insertion Loss)




High-frequency Characteristics at 50 Ω (Return Loss, V.SWR)



Must Operate and Must Release Time Distribution (See note.)



Must Operate and Must Release Bounce Time Distribution (See note.)




Note: The tests were conducted at an ambient temperature of 23°C.

Dimensions


Note: All units are in millimetres unless otherwise indicated.

■ Models with PCB Terminals

G6Z-1PE
G6ZU-1PE
G6Z-1PE-R



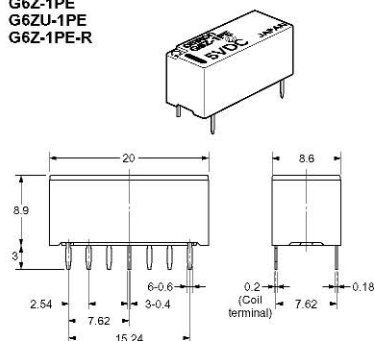


Mounting Dimensions (Bottom View)
Tolerance: ± 0.1 mm




Note: Each value has a tolerance of ± 0.3 mm.


Terminal Arrangement/Internal Connections (Bottom View)



G6Z-1PE-A
G6ZU-1PE-A


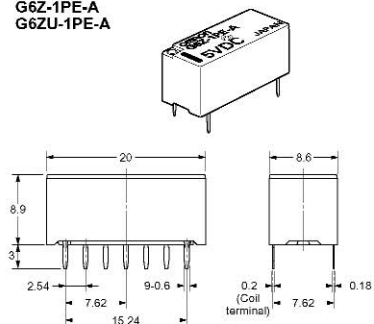


Mounting Dimensions (Bottom View)
Tolerance: ± 0.1 mm





Note: Each value has a tolerance of ± 0.3 mm.

Terminal Arrangement/Internal Connections (Bottom View)



Surface-Mounting High-Frequency Relay – G6Z


**G6Z-1P
G6ZU-1P**

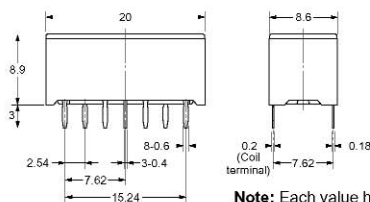


Note: Each value has a tolerance of ± 0.3 mm.

Mounting Dimensions (Bottom View)



Tolerance: ± 0.1 mm



Terminal Arrangement/Internal Connections (Bottom View)




**G6Z-1P-A
G6ZU-1P-A**

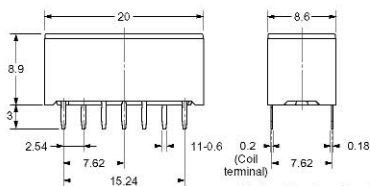


Note: Each value has a tolerance of ± 0.3 mm.

Mounting Dimensions (Bottom View)



Tolerance: ± 0.1 mm



Terminal Arrangement/Internal Connections (Bottom View)




G6ZK-1PE

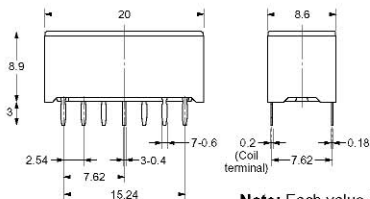


Note: Each value has a tolerance of ± 0.3 mm.

Mounting Dimensions (Bottom View)

Tolerance: ± 0.1 mm





Terminal Arrangement/Internal Connections (Bottom View)




Surface-Mounting High-Frequency Relay – G6Z

G6ZK-1PE-A

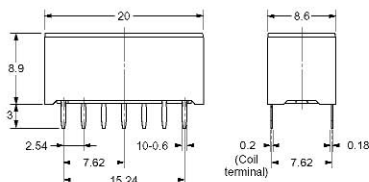


Mounting Dimensions (Bottom View)

Tolerance: ± 0.1 mm





Terminal Arrangement/Internal Connections (Bottom View)




Note: Each value has a tolerance of ± 0.3 mm.

G6ZK-1P

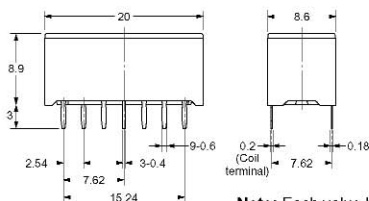


Mounting Dimensions (Bottom View)

Tolerance: ± 0.1 mm





Terminal Arrangement/Internal Connections (Bottom View)




Note: Each value has a tolerance of ± 0.3 mm.

G6ZK-1P-A

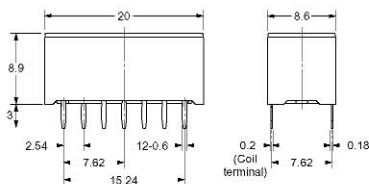


Mounting Dimensions (Bottom View)

Tolerance: ± 0.1 mm





Terminal Arrangement/Internal Connections (Bottom View)




Note: Each value has a tolerance of ± 0.3 mm.

■ Models with Surface-mounting Terminals

**G6Z-1FE
G6ZU-1FE**





Mounting Dimensions (Top View)
Tolerance: ± 0.1 mm






Note 1: Each value has a tolerance of ± 0.3 mm.
Note 2: The coplanarity of the terminals is 0.1 mm max.


Terminal Arrangement/Internal Connections (Top View)



**G6Z-1FE-A
G6ZU-1FE-A**





Mounting Dimensions (Top View)
Tolerance: ± 0.1 mm






Note 1: Each value has a tolerance of ± 0.3 mm.
Note 2: The coplanarity of the terminals is 0.1 mm max.


Terminal Arrangement/Internal Connections (Top View)



**G6Z-1F
G6ZU-1F**





Mounting Dimensions (Top View)
Tolerance: ± 0.1 mm





Note 1: Each value has a tolerance of ± 0.3 mm.
Note 2: The coplanarity of the terminals is 0.1 mm max.

Terminal Arrangement/Internal Connections (Top View)




Surface-Mounting High-Frequency Relay – G6Z

G6Z-1F-A
G6ZU-1F-A

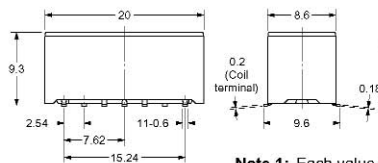


Mounting Dimensions (Top View)
Tolerance: ± 0.1 mm




Note 1: Each value has a tolerance of ± 0.3 mm.
2: The coplanarity of the terminals is 0.1 mm max.


Terminal Arrangement/Internal Connections (Top View)

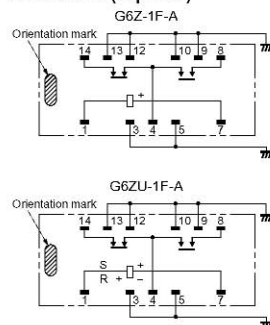

G6ZK-1FE

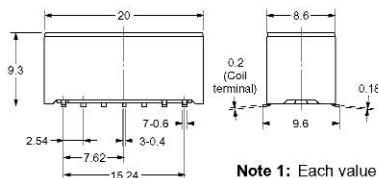


Mounting Dimensions (Top View)
Tolerance: ± 0.1 mm




Note 1: Each value has a tolerance of ± 0.3 mm.
2: The coplanarity of the terminals is 0.1 mm max.


Terminal Arrangement/Internal Connections (Top View)



G6ZK-1FE-A

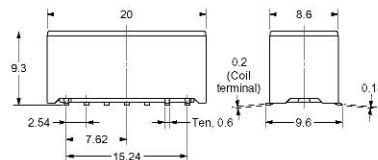


Mounting Dimensions (Top View)
Tolerance: ± 0.1 mm



Note 1: Each value has a tolerance of ± 0.3 mm.
2: The coplanarity of the terminals is 0.1 mm max.

Terminal Arrangement/Internal Connections (Top View)




Stick Packing and Tape Packing

Stick Packing

Relays in stick packing are arranged so that the orientation mark of each Relay is on the left side.

Be sure not to make mistakes in Relay orientation when mounting the Relay to the PCB.




Stick length: 530 mm (stopper not included)
No. of Relays per stick: 25

Tape Packing (Surface-mounting Terminal Models)


When ordering Relays in tape packing, add the prefix “-TR” to the model number, otherwise the Relays in stick packing will be provided.

Relays per Reel: 300


Direction of Relay Insertion

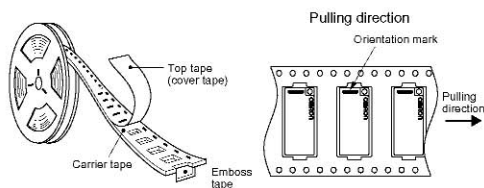

Reel Dimensions

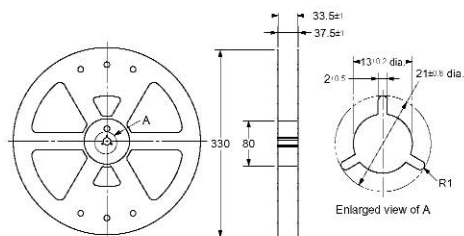

Carrier Tape Dimensions

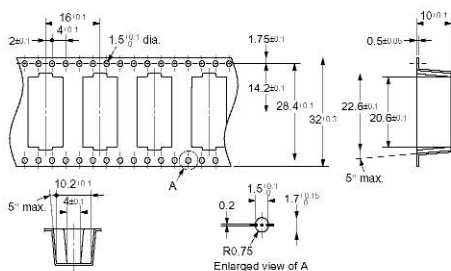


Note: The radius of the unmarked corner is 0.3 mm.

Recommended Soldering Method

Temperature Conditions for IRS Method


When using reflow soldering, ensure that the Relay terminals and the top of the case stay below the following curve. Check that these conditions are actually satisfied before soldering the terminals.



Do not quench the terminals after mounting. Clean the Relay using alcohol or water no hotter than 40°C max.

The thickness of cream solder to be applied should be between 150 and 200 μm on OMRON's recommended PCB pattern.

Correct Soldering



Incorrect Soldering



Check the soldering in the actual mounting conditions before use.

Measured part	Preheating (T1 > T2, t1)	Soldering (T3, t2)	Maximum peak (T4)
Terminals	150 → 180°C, 120 s max.	230°C min, 30 s max.	250°C max.
Top of case	---	---	255°C max.

Safety Precautions


■ Precautions for Correct Use

Please observe the following precautions to prevent failure to operate, malfunction, or undesirable effect on product performance.


High-frequency Characteristics Measurement Method and Measurement Substrate

High-frequency characteristics for the G6Z are measured in the way shown below. Consult your OMRON representative for details on 50- Ω models.


Measurement Method for 75- Ω Models

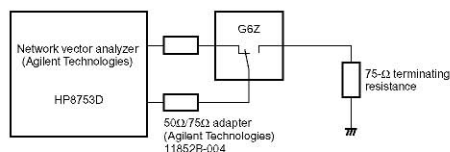


Through-hole Substrate (75- Ω Models, E-shape or Y-shape)

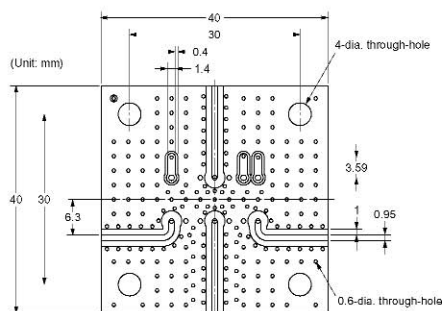

SMD-type Substrate (75- Ω Models, E-shape or Y-shape)

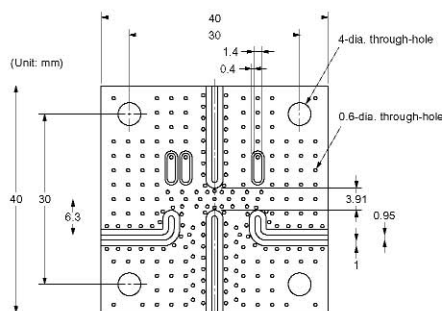

Substrate for High-frequency Characteristic Compensation (75- Ω Models, E-shape or Y-shape)

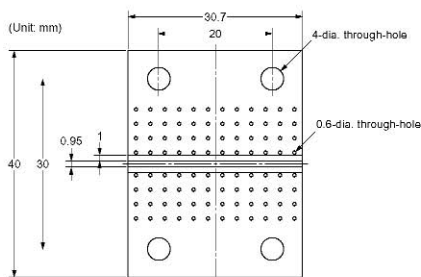

Substrate Types

Material: FR-4 glass epoxy (glass cloth impregnated with epoxy resin and copper laminated to its outer surface)

Thickness: 1.6 mm

Thickness of copper plating: 18 μ m

- Note:**
1. The compensation substrate is used when measuring the Relay's insertion loss. The insertion loss is obtained by subtracting the measured value for the compensation substrate from the measured value with the Relay mounted to the high-frequency measurement substrate.
 2. For convenience, the diagrams of the high-frequency measurement substrates given here apply both to models with an E-shape terminal structure and to models with a Y-shape terminal structure.
 3. Be sure to mount a standoff tightly to the through-hole substrate.
 4. Use measuring devices, connectors, and substrates that are appropriate for 50 Ω and 75 Ω respectively.
 5. Ensure that there is no pattern under the Relay. Otherwise, the impedance may be adversely affected and the Relay may not be able to attain its full characteristics.

Handling

Do not use the Relay if it has been dropped. Dropping the Relay may adversely affect its functionality.

Protect the Relay from direct sunlight and keep the Relay under normal temperature, humidity, and pressure.

Flow Soldering

Solder: JIS Z3282, H63A


Soldering temperature: Approx. 250°C (260°C if the DWS method is used)

Soldering time: Approx. 5 s max. (approx. 2 s for the first time and approx. 3 s for the second time if the DWS method is used)

Be sure to make a molten solder level adjustment so that the solder will not overflow on the PCB.

Claw Securing Force During Automatic Mounting

During automatic insertion of Relays, be sure to set the securing force of each claw to the following so that the Relay's characteristics will be maintained.



Direction A: 4.90 N max.
Direction B: 4.90 N max.
Direction C: 4.90 N max.

Secure the claws to the shaded area.
Do not attach them to the center area
or to only part of the Relay.

Latching Relay Mounting


Make sure that the vibration or shock that is generated from other devices, such as Relays, on the same panel or substrate and imposed on the Latching Relay does not exceed the rated value, otherwise the set/reset status of the Latching Relay may be changed. The Latching Relay is reset before shipping. If excessive vibration or shock is imposed, however, the Latching Relay may be set accidentally. Be sure to apply a reset signal before use.

Coating

Do not use silicone coating to coat the Relay when it is mounted to the PCB. Do not wash the PCB after the Relay is mounted using detergent containing silicone. Otherwise, the detergent may remain on the surface of the Relay.

Surface-Mountable 2.5GHz Band
Miniature SPDT High-frequency
Relay

- ROHS compliant.
- Superior high-frequency characteristics, such as an isolation of 60 dB min., insertion loss of 0.2 dB max., and V.S.W.R. of 1.2 max. at 2.5 GHz (50 Ω).
- Surface-mounting terminals and superior high-frequency characteristics combined through adoption of tri-plate micro strip type transmission lines.
- Ultra-miniature at 20 x 9.4 x 8.9 mm (L x W x H).
- Serialised relay lineup consisting of single-winding latching type (200 mW), double-winding latching type (360 mW), and reverse-arrangement contact type.
- Y-shape terminal arrangement that simplifies wiring to PCBs.

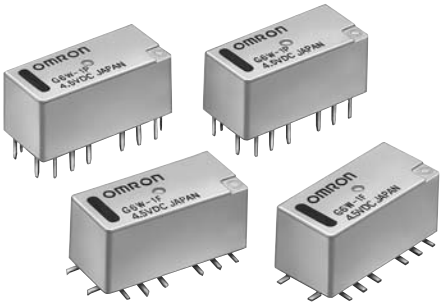

Ordering Information

Classification				Single-side stable	Single-winding latching	Double-winding latching
SPDT	Fully Sealed	Through-hole terminal	Y-shape terminal	G6W-1P	G6WU-1P	G6WK-1P
		Surface-mounting terminal	Y-shape terminal	G6W-1F	G6WU-1F	G6WK-1F

Note: When ordering, add the rated coil voltage to the model number.

Example: G6W-1P 12 VDC

Rated coil voltage

Model Number Legend

G6W

12345

1. Relay Function

- None: Single-side stable
- U: Single-winding latching
- K: Double-winding latching

2. Contact Form

- 2: SPDT

3. Terminal Shape

- F: Surface-mounting terminals
- P: PCB terminals

4. Terminal Arrangement

- None: Y-shape terminal arrangement (standard)

5. Classification

- None: Standard contact arrangement
- R: Reverse contact arrangement

Application Examples

Mobile phone base station (W-Cdma, UMTS, Cdma-2000, PCS), wireless LAN, and measurement devices.

Specifications

■ Contact Ratings

Item	Load	Resistive load
Rated load		10 mA at 30 VAC
		10 mA at 30 VDC
		2.5 GHz, 50 Ω, 10 W (See note 2.)
Contact material		Au
Rated carry current		0.5 A
Max. switching voltage		30 VDC, 30 VAC
Max. switching current		0.5 A

■ High-frequency Characteristics

Item	Frequency	2.0 GHz	2.5 GHz
Isolation		65 dB min.	60 dB min.
Insertion loss		0.2 dB max.	
V.SWR		1.2 max.	
Max. carry power		20 W (See note 2.)	
Max. switching power		10 W (See note 2.)	

Note: 1. The above values are initial values.

2. This value is for a load with V.SWR ≤ 1.2 at the impedance of 50 Ω.

■ Coil Ratings

Single-side Stable Relays (G6W-1F, G6W-1P)

Rated voltage	3 VDC	4.5 VDC	9 VDC	12 VDC	24 VDC
Rated current	66.7 mA	44.4 mA	22.2 mA	16.7 mA	8.3 mA
Coil resistance	45 Ω	101 Ω	405 Ω	720 Ω	2,880 Ω
Must operate voltage	80% max. of rated voltage				
Must release voltage	10% min. of rated voltage				
Max. voltage	150% of rated voltage				
Power consumption	Approx. 200 mW				

Single-winding Latching Relays (G6WU-1F, G6WU-1P)

Rated voltage	9 VDC	12 VDC
Rated current	22.2 mA	16.7 mA
Coil resistance	405 Ω	720 Ω
Must operate voltage	80% max. of rated voltage	
Must reset voltage	80% max. of rated voltage	
Max. voltage	150% of rated voltage	
Power consumption	Approx. 200 mW	

Double-winding Latching Relays (G6WK-1F, G6WK-1P)

Rated voltage	3 VDC	4.5 VDC	9 VDC	12 VDC	24 VDC
Rated current	120 mA	80 mA	40 mA	30 mA	15 mA
Coil resistance	25 Ω	56 Ω	225 Ω	400 Ω	1,600 Ω
Must set voltage	80% max. of rated voltage				
Must reset voltage	80% max. of rated voltage				
Max. voltage	150% of rated voltage				
Power consumption	Approx. 360 mW				

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

2. The operating characteristics are measured at a coil temperature of 23°C.

3. The maximum voltage is the highest voltage that can be imposed on the Relay coil.

Surface-Mounting High-Frequency Relay – G6W


■ Characteristics

Classification		Single-side Stable	Single-winding Latching	Double-winding Latching
Model		G6W-1F, G6W-1P	G6WU-1F, G6WU-1P	G6WK-1F, G6WK-1P
Contact resistance (See note 1.)		100 mΩ max.		
Operate (set) time (See note 2.)		10 ms max. (Approx. 3.5 ms)		10 ms max. (Approx. 2.5 ms)
Release (reset) time (See note 2.)		10 ms max. (Approx. 2.5 ms)		
Minimum set/reset signal width		–		12 ms
Insulation resistance (See note 3.)		100 MΩ min. (at 500 VDC)		
Dielectric strength	Coil and contacts	1,000 VAC, 50/60 Hz for 1 min		
	Coil and ground, contacts and ground	500 VAC, 50/60 Hz for 1 min		
	Contacts of same polarity	500 VAC, 50/60 Hz for 1 min		
Vibration resistance	Destruction	10 to 55 Hz, 2-mm double amplitude		
	Malfunction	10 to 55 Hz, 1.5-mm double amplitude		
Shock resistance	Destruction	1,000 m/s ²		
	Malfunction	500 m/s ²		
Endurance	Mechanical	1,000,000 operations min. (at 36,000 operations/hour)		
	Electrical	300,000 operations min. (30 VAC 10 mA/ 30 VDC 10 mA), 100,000 operations min. (2.5 GHz, 50Ω, 10 W)		
Ambient temperature		Operating: -40°C to 70°C (with no icing or condensation)		
Ambient humidity		Operating: 5% to 85%		
Weight		Approx. 3 g		

- Note:** 1. The contact resistance was measured with 10 mA at 1 VDC with a fall-of-potential method.
2. Values in parentheses are actual values.
3. The insulation resistance was measured with a 500-VDC Megger Tester applied to the same parts as those used for checking the dielectric strength.
4. The above values are initial values.


Engineering Data

Ambient Temperature vs. Maximum Voltage




Note: “Maximum voltage” is the maximum voltage that can be applied to the Relay coil.

Ambient Temperature vs. Must Set or Must Reset Voltage




Shock Malfunction




Conditions: Shock is applied in ±X, ±Y, and ±Z directions three times each with and without energizing the Relays to check the number of contact malfunctions.


Electrical Endurance
(With Must Set and Must Reset
Voltage)




Electrical Endurance
(With Must Set and Must Reset
Voltage)






Electrical Endurance
(Contact Resistance)



Electrical Endurance
(Contact Resistance)




External Magnetic Interference




270



Signal Relays




Tolerance: ± 0.1 mm



Tolerance: ± 0.3 mm unless specified.

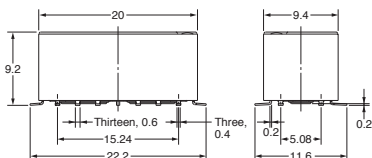


Tolerance: ± 0.1 mm




Note: Each value has a tolerance of ± 0.3 mm.

A photograph of an Omron G4LE-1P 4-pin PLC relay. The component is a small, rectangular plastic housing with four pins extending from the bottom. The top surface is labeled with the Omron logo, the model number 'G4LE-1P', and the voltage rating '4VDC 100mA'.



Tolerance: ± 0.1 mm




Tolerance: ± 0.3 mm unless specified.

Recommended Soldering Method


TEMPERATURE PROFILE ACCORDING TO IRS METHOD

- When performing reflow-soldering, check the profile on an actual device after setting the temperature condition so that the temperatures at the relay terminals and the upper surface of the case do not exceed the limits specified in the following table.

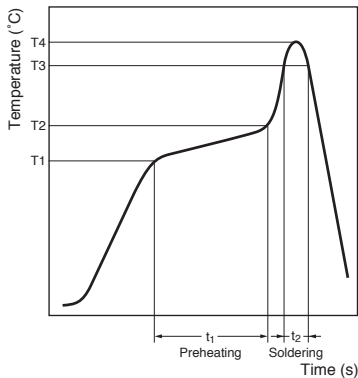

Item Measuring position	Preheating (T1 to T2, t ₁)	Soldering (T3, t ₂)	Peak value (T4)
Terminal	150°C to 180°C, 120 s max.	230°C min., 30 s max.	250°C max.
Upper surface of case	—	—	255°C max.

- The thickness of cream solder to be applied should be within a range between 150 and 200 μm on OMRON's recommended PCB pattern.



Visually check that the Relay is properly soldered.

BOTTOM GROUND SOLDERING CONDITIONS

Soldering iron: 50 W

Iron temperature: 380°C to 400°C

Soldering time: 10 s max.


Note: The above conditions are given for reference only; it is recommended to double-check the suitability under actual conditions.

Precautions

CORRECT USE


High-frequency Characteristics Measurement Method and Substrate to be Measured

High-frequency Characteristics for G6W are measured as shown below.

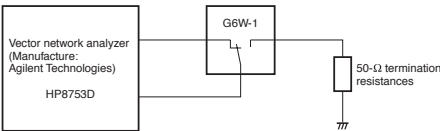


Through-hole substrate

Substrate: t-0.8 BT resin (Dielectric constant at 2 GHz: 3.37)

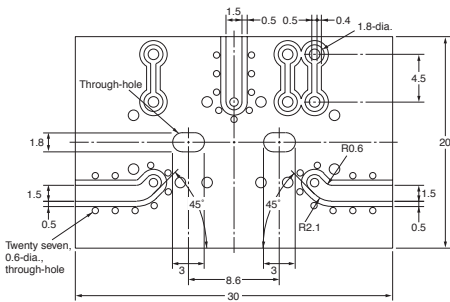

Undersurface of relay




Signal Relays

273

High-frequency, High-capacity Coaxial Switch Supporting Bandwidth to 26.5 GHz

- ROHS compliant.
- Superior high-frequency characteristics, such as an isolation of 60 dB min., insertion loss of 0.8 dB max., and V.SWR of 1.7 max. at 26.5 GHz (50Ω).
- Contact carry power of 120 W at 3 GHz.
- High sensitivity with rated power consumption of 700 mW for failsafe models and 500 mW for double-winding latching models.
- Models with TTL-driven double-winding latching and indicator terminals are available.

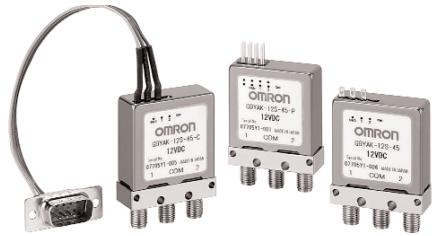

NEW

Application Examples

- Mobile phone stations and antenna devices
- Wireless devices, wireless LAN, and disaster prevention wireless
- Test equipment, measuring equipment, and jigs
- Broadcasting facilities (digital TV, cable TV, and satellite broadcasting)

Ordering Information

Model Number Legend

G9YA
1 2 3 4 5 6 7 8

1. Relay Function

- None: Failsafe
K: Double-winding latching
T: TTL-driven double-winding latching (with self cut-off function)

2. Contact Form

- 12: SPDT

3. Terminal Shape

- S: SMA

4. Frequency

- 3: 18GHz
4: 26.5 GHz

5. Characteristic Impedance

- 5: 50 Ω

6. Operating Terminal

- None: Soldering terminal
P: Pin terminal
C: Connector cable

7. Indicator Terminal

- None: No indicator terminal
N: Indicator terminal

8. Data Package

- None: No data package
D: Data package

■ List of Models

Standard Models with Soldering Terminals

Classification	Contact form	Indicator terminal	Data package	Rated coil voltage	Model packaging unit	Minimum
Failsafe	SPDT	No	No	4.5, 12, 15, 24, and 28 VDC	G9YA-12S-45	One per box
			Yes	4.5, 12, 15, 24, and 28 VDC	G9YA-12S-45-D	
		Yes	No	4.5, 12, 15, 24, and 28 VDC	G9YA-12S-45-N	
			Yes	4.5, 12, 15, 24, and 28 VDC	G9YA-12S-45-ND	
Double-winding latching	SPDT	No	No	4.5, 12, 15, 24, and 28 VDC	G9YAK-12S-45	One per box
			Yes	4.5, 12, 15, 24, and 28 VDC	G9YAK-12S-45-D	
		Yes	No	4.5, 12, 15, 24, and 28 VDC	G9YAK-12S-45-N	
			Yes	4.5, 12, 15, 24, and 28 VDC	G9YAK-12S-45-ND	
TTL-driven double-winding latching (with self cutoff function) latching	SPDT	No	No	5, 12, 15, and 24 VDC	G9YAT-12S-45	One per box
			Yes	5, 12, 15, and 24 VDC	G9YAT-12S-45-D	
		Yes	No	5, 12, 15, and 24 VDC	G9YAT-12S-45-N	
			Yes	5, 12, 15, and 24 VDC	G9YAT-12S-45-ND	

Standard Models with Pin Terminals

Classification	Contact form	Indicator terminal	Data package	Rated coil voltage	Model packaging unit	Minimum
Failsafe	SPDT	No	No	4.5, 12, 15, 24, and 28 VDC	G9YA-12S-45-P	One per box
			Yes	4.5, 12, 15, 24, and 28 VDC	G9YA-12S-45-PD	
		Yes	No	4.5, 12, 15, 24, and 28 VDC	G9YA-12S-45-PN	
			Yes	4.5, 12, 15, 24, and 28 VDC	G9YA-12S-45-PND	
Double-winding latching	SPDT	No	No	4.5, 12, 15, 24, and 28 VDC	G9YAK-12S-45-P	One per box
			Yes	4.5, 12, 15, 24, and 28 VDC	G9YAK-12S-45-PD	
		Yes	No	4.5, 12, 15, 24, and 28 VDC	G9YAK-12S-45-PN	
			Yes	4.5, 12, 15, 24, and 28 VDC	G9YAK-12S-45-PND	
TTL-driven double-winding latching (with self cutoff function) latching	SPDT	No	No	5, 12, 15, and 24 VDC	G9YAT-12S-45-P	One per box
			Yes	5, 12, 15, and 24 VDC	G9YAT-12S-45-PD	
		Yes	No	5, 12, 15, and 24 VDC	G9YAT-12S-45-PN	
			Yes	5, 12, 15, and 24 VDC	G9YAT-12S-45-PND	

Coaxial Switch – G9YA

Standard Models with Connector Cables

Classification	Contact form	Indicator terminal	Data package	Rated coil voltage	Model packaging unit	Minimum
Failsafe	SPDT	No	No	4.5, 12, 15, 24, and 28 VDC	G9YA-12S-45-C	One per box
			Yes	4.5, 12, 15, 24, and 28 VDC	G9YA-12S-45-CD	
		Yes	No	4.5, 12, 15, 24, and 28 VDC	G9YA-12S-45-CN	
			Yes	4.5, 12, 15, 24, and 28 VDC	G9YA-12S-45-CND	
Double-winding latching	SPDT	No	No	4.5, 12, 15, 24, and 28 VDC	G9YAK-12S-45-C	One per box
			Yes	4.5, 12, 15, 24, and 28 VDC	G9YAK-12S-45-CD	
		Yes	No	4.5, 12, 15, 24, and 28 VDC	G9YAK-12S-45-CN	
			Yes	4.5, 12, 15, 24, and 28 VDC	G9YAK-12S-45-CND	
TTL-driven double-winding latching (with self cutoff function) latching	SPDT	No	No	5, 12, 15, and 24 VDC	G9YAT-12S-45-C	One per box
			Yes	5, 12, 15, and 24 VDC	G9YAT-12S-45-CD	
		Yes	No	5, 12, 15, and 24 VDC	G9YAT-12S-45-CN	
			Yes	5, 12, 15, and 24 VDC	G9YAT-12S-45-CND	

Specifications

■ Ratings

Indicator Rating

Rating	100 mA max. at 30 V
Contact resistance	1 Ω max. (See note 2.)

Note: 1. The above values are initial values.

2. The contact resistance was measured with 10 mA at 1 VDC with a voltage drop method.

High Frequency Characteristics

Frequency Item	1 GHz max.	4 GHz max.	8 GHz max.	12.4 GHz max.	18 GHz max.	26.5 GHz max.
Insertion loss	0.2 dB		0.3 dB	0.4 dB	0.5 dB	0.8 dB
Isolation	85 dB	80 dB	70 dB	65 dB	60 dB	
V.SWR	1.1	1.15	1.25	1.35	1.5	1.7

Note: The above values are initial values.

Failsafe Model G9YA-12S-45(35)

Frequency Item	Rated current	Coil resistance	Must operate voltage	Must release voltage	Maximum voltage	Power consumption
4.5 VDC	155.2 mA	29 Ω	80% max. of rated voltage	10% min. of rated voltage	150% of rated voltage	Approx. 700 mW
12 VDC	58.5 mA	205 Ω				
15 VDC	46.7 mA	321 Ω				
24 VDC	29.2 mA	822 Ω				
28 VDC	25.0 mA	1,118 Ω				

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

2. The operating characteristics are measured at a coil temperature of 23°C.

3. The maximum voltage is the highest voltage that can be imposed on the Relay coil instantaneously.

Coaxial Switch – G9YA

Double-winding Latching Model G9YA-12S-45(35)

Frequency Item	Rated current	Coil resistance voltage	Must set voltage	Must reset voltage	Maximum voltage	Power consumption
4.5 VDC	109.8 mA	41 Ω	80% max. of rated voltage	10% min. of rated voltage	150% of rated voltage	Approx. 500 mW
12 VDC	41.7 mA	288 Ω				
15 VDC	33.3 mA	450 Ω				
24 VDC	20.8 mA	1,152 Ω				
28 VDC	17.9 mA	1,568 Ω				

TTL-driven Latching Model G9YA-12S-45(35)

Frequency Item	Rated current		Electronic self cut-off	Switching frequency
	On	Off		
5 VDC	2.4 to 5.5 V	0 to 0.5 V	Yes	180 operations per minute max. (ON time: OFF time = 1:1)
12 VDC				
15 VDC				
24 VDC				

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
2. The operating characteristics are measured at a coil temperature of 23°C.
3. The maximum voltage is the highest voltage that can be imposed on the Relay coil instantaneously.

Models with Indicator Terminals

Note: An extra 140 to 300 mW of power consumption is added to models with indicator terminals, due to the operating coil and voltage specifications.


■ Characteristics

Type		Failsafe model	Double-winding Latching	TTL-driven latching model
Item	Model	G9YA-12S-45(35)	G9YAK-12S-45(35)	G9YA-12S-45(35)
Contact resistance (See note 3.)		100 mΩ max.		
Operate (set) time		15 ms max.		
Release (reset) time		15 ms max.		
Minimum set/reset signal width		-	100ms	
Insulation resistance (See note 4.)		1000 MΩ min. (at 500 VDC)		
Dielectric strength	Coil and contacts	500 VAC, 50/60 Hz for 1 min		
	Coil and ground, contacts and ground	500 VAC, 50/60 Hz for 1 min		
	Contacts of same polarity	500 VAC, 50/60 Hz for 1 min		
Vibration resistance	Destruction	10 to 55 Hz, 2-mm single amplitude (5.0 mm double amplitude)		
	Malfunction	10 to 55 Hz, 1.5-mm single amplitude (3.0 mm double amplitude)		
Shock resistance	Destruction	1,000 m/s²		
	Malfunction	500 m/s²		
Endurance	Mechanical	5,000,000 operations min. (at 36,000 operations/hour)		
	Electrical	5,000,000 operations min. 3 GHz, 5W 50Ω, V.SWR1.2 max.(at switching frequency of 1,800 operations per hour)		
Ambient temperature		Operating: -55°C to 85°C (with no icing or condensation)		
Ambient humidity		Operating: 5% to 85%		
Weight		Approx. 50 g		


- Note:** 1. The above values are initial values.
2. Rated and characteristic (initial) values are for a standard temperature of 23°C and a humidity of 65% unless otherwise indicated.
3. The contact resistance was measured with 10 mA at 1 VDC with a voltage drop method.
4. The insulation resistance was measured with a 500-VDC megohmmeter applied to the same parts as those used for checking the dielectric strength.

Engineering Data


High-frequency Characteristics (Isolation) (See notes 1 and 2.)



High-frequency Characteristics (Insertion Loss) (See notes 1 and 2.)



High-frequency Characteristics (Return Loss, V.SWR) (See notes 1 and 2.)



- Note:** 1. The tests were conducted at an ambient temperature of 23°C.
2. The high-frequency characteristics will vary according to the connectors. Be sure to check operation including durability at the actual device before use.

Dimensions


Note: All units are in millimetres unless otherwise indicated.

■ Models with Soldering Terminals

G9YA-12S-45(35)-□

G9YAK-12S-45(35)-□

G9YAT-12S-45(35)-□

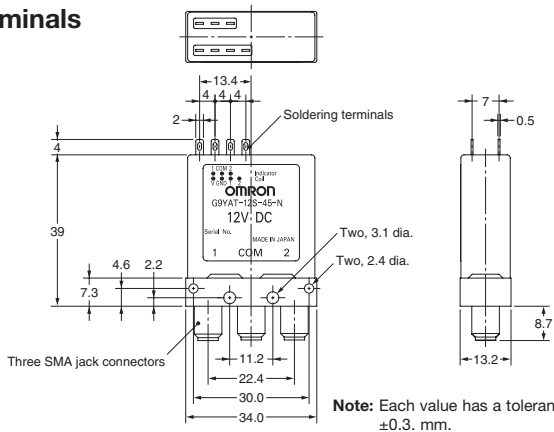

Note: Each value has a tolerance of ± 0.3 mm.


Model	G9YA-12S-45(35)-□	G9YAK-12S-45(35)-□	G9YAT-12S-45(35)-□
Indicator terminal Type	Failsafe	Double-winding latching	TTL-driven double-winding
Without indicator terminals			
With indicator terminals			

■ Models with Pin Terminals

G9YA-12S-45(35)-P□

G9YAK-12S-45(35)-P□

G9YAT-12S-45(35)-P□

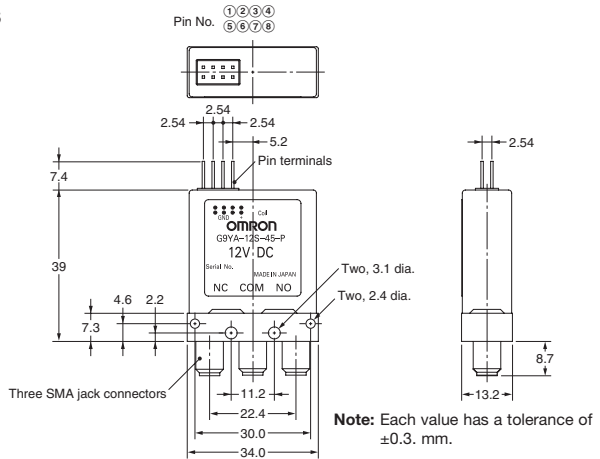

Pin Terminal arrangement



Pin number		Indicator				Coil			
		1	2	3	4	5	6	7	8
Without indicator terminals	Failsafe						GND		+
	Double-winding latching						GND	1	2
	TTL-driven double-winding latching					V	GND	Logic 1	Logic 2
With indicator terminals	Failsafe		NC	COM	NO		GND		+
	Double-winding latching		1	COM	2		GND	1	2
	TTL-driven double winding latching		1	COM	2	V	GND	Logic 1	Logic 2

■ Models with Connector Cables

G9YA-12S-45(35)-C□

G9YAK-12S-45(35)-C□

G9YAT-12S-45(35)-C□

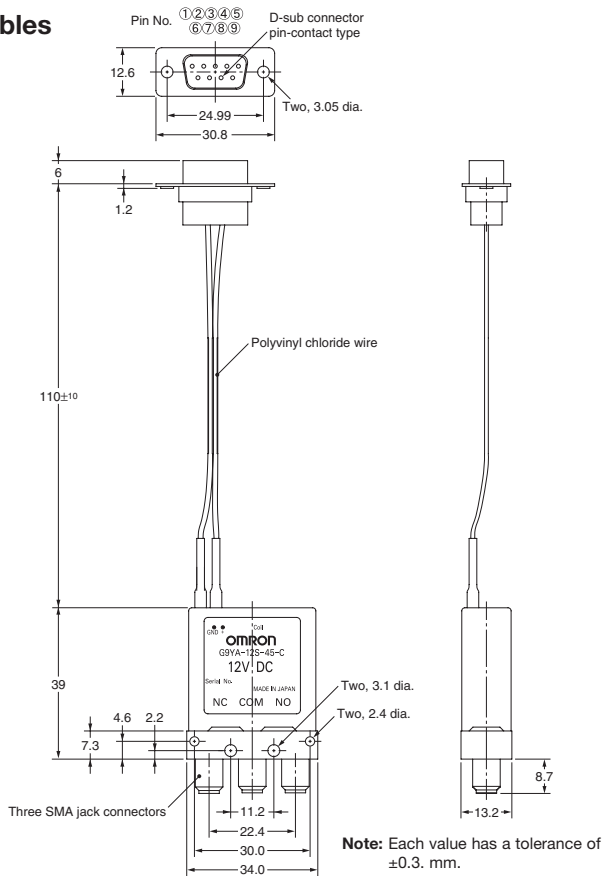

Pin Terminal arrangement

Pin number		Indicator				Coil				
		1	2	3	4	5	6	7	8	
Without indicator terminals	Failsafe							GND	+	
	Double-winding latching							GND	1	2
	TTL-driven double-winding latching						V	GND	Logic 1	Logic 2
With indicator terminals	Failsafe		NC	COM	NO			GND	+	
	Double-winding latching		1	COM	2			GND	1	2
	TTL-driven double winding latching		1	COM	2		V	GND	Logic 1	Logic 2

Precautions

■ Precautions for Correct Use

Relay handling

- Relays are precision components. Do not subject the Relay to vibration or shock in excess of the standard values, whether before or after mounting. The original performance cannot be maintained if the Relay is subjected to abnormal vibration or shock or dropped. Also, do not subject the Relay to vibration or shock in excess of the rated values when it is still packaged.
- Avoid subjecting the Relay to direct sunlight when it is being used, stored or transported. Keep the Relay at conditions of normal temperature, humidity, and pressure.
- The Relay is not sealed. It cannot be washed.
- Be absolutely sure not to wire the Relay incorrectly. Incorrect wiring will result in failure of Relay functions and damage or fire in the Relay, in addition to affecting external circuits.
- Recommended torque for mounting the SMA connectors is the MIL-C-39012 standard of 0.90 ± 0.1 N·m. The conditions, however, depend on the compatibility with the material of the connectors.
- Use of two or more Relays may result in change in the Relay characteristics due to interference in the magnetic fields generated by the Relays. Be sure to check operation using the actual devices before use.
- Use a power supply for the coil operating power supply with a maximum ripple of 5%. Be sure to check operation using the actual devices before use.
- Operation in excess of the coil ratings, contact ratings, switching service life or other specifications may result in abnormal heat generation, smoke, or fire.

Latching Relay Mounting

Make sure that the vibration or shock generated from other devices (e.g., Relays) on the same panel during operation or resetting do not exceed the values provided in the catalog, otherwise the latching Relay that has been set may be reset or vice versa. The latching Relay is reset before shipping. If excessive vibration or shock is imposed, however, the latching Relay may be set accidentally. Be sure to apply a reset signal before use.

Long-term Continuously ON Contacts

Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts because the heat generated by the coil itself will deteriorate the insulation, causing a film to develop on the contact surfaces. We recommend using a latching Relay (magnetic-holding Relay) in this kind of circuit. If a failsafe Relay must be used in this kind of circuit, use a full-loop circuit design to provide protection against possible poor connections and coil disconnection.

Using Relays in an Atmosphere Containing Corrosive Gas (Silicon, Sulfuric, or Organic Gas)

Do not use Relays in a location where silicon gas, sulfuric gas (SO₂, H₂S), or organic gas is present. If Relays are used for a long period in an atmosphere of sulfuric gas or organic gas, contact surfaces may become corroded and cause contact instability and obstruction, and terminal soldering characteristics may be degraded. If Relays are stored or used for a long time in an atmosphere of silicon gas, a silicon coating will be generated on contact surfaces, causing contact failure.

Connecting to Coil Terminals and Indicator Terminals

I. Models with Soldering Terminals

Perform manual soldering under the following conditions.

Soldering iron tip temperature: 280 to 300°C

Soldering time: Approx. 3 s max.

II. Models with Pin Terminals

Heed the following precautions when using models with pin terminals.

1. Connectors for use: Straight dip type for panels
Male connectors: HKP-8M29 (Honda Tsushin Kogyo)
Refer to the general catalog of Honda Tsushin Kogyo for connector models and specifications.
2. The sockets do not have a lock mechanism. Pulling the lead wires, shock, or long-term vibration may cause the connectors to become disconnected. Heed the following precautions.
 - Securely fix the Relay and connectors and make sure that no force is pulling on the lead wires during use.
 - Fully insert the socket into the Relay connector.
3. Do not solder the lead wires directly to the pin connectors.

ALL DIMENSIONS SHOWN ARE IN MILLIMETRES.

To convert millimetres into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.