

### **GO FOR EXPERIENCE**

## **We're a quality component supplier for over half a century**

The huge installed base of our easy-to-use control components, proves our experience. Our control products with a display provide the clearest visibility and a perfect read-out. Omron, your single source for all control components.

## Control components – Table of contents

### Temperature controllers 16

Product overview		322
Selection table		324
Basic temperature controller	K8AB-TH	327
	E5C2	328
	E5CSV	329
General purpose controller	E5_N	330
	Celiox <sup>o</sup>	332
Advanced and Multi-Loop controller	E5_K/E5_K-T	334
	E5_R/E5_R-T	335
Auxiliaries	PRT1-SCU11	337

### Power supplies 17

Product overview		338
Selection table		340
Single-phase	S8VS	341
	S8VM	342
	S8TS	343
Three-phase	S8VT	344
	S8T-DCBU-01/-02	345

### Timers 18

Product overview		346
Selection table		348
Analog solid state timers	H3DS	350
	H3DE	351
	H3YN	352
	H3CR	353
Digital timers	H5CX	354
Motor timers	H2C	355

### Counters 19

Product overview		356
Selection table		358
Totalisers	H7EC	360
	H7ET	361
	H7ER	362
Pre-set counters	H8GN	363
	H7CX	364
Cam positioners	H8PS	365

### Programmable relays 20

Product overview		366
Selection table		369
	ZEN-10C	370
	ZEN-20C	371
	ZEN-8E	372
	ZEN-PA	373

### Digital panel indicators 21

Product overview		374
Selection table		376
1/32 DIN multi-function	K3GN	378
1/8 DIN standard indicators	K3MA-J, -L, -F	379
1/8 DIN advanced indicators – analog input	K3HB-X, -H, -V, -S	380
1/8 DIN advanced indicators – digital input	K3HB-C, -P, -R	382

## CELCIUX° – CONTROL AND CONNECTIVITY

### CelciuX° – Multi Loop Temperature Controller


The CelciuX° is designed to handle complex temperature profiles thanks to Omron's unique Gradient Temperature Control (GTC) algorithm and to offer easy program-less communication with Omron and third-party PLCs and HMI. Above all, the CelciuX° incorporates all "simple to use" clever temperature control technology, like 2-PID, disturbance control and various ways of tuning.


- Interfaces to a wide range of industrial networks
- Reduced engineering due to program-less communications, Smart Active Parts and Function Block Libraries
- One unit handling various types of input, such as Pt, Thermocouple, mA, and V input



Always the latest news on:

[www.omron-industrial.com/celciuX](http://www.omron-industrial.com/celciuX)

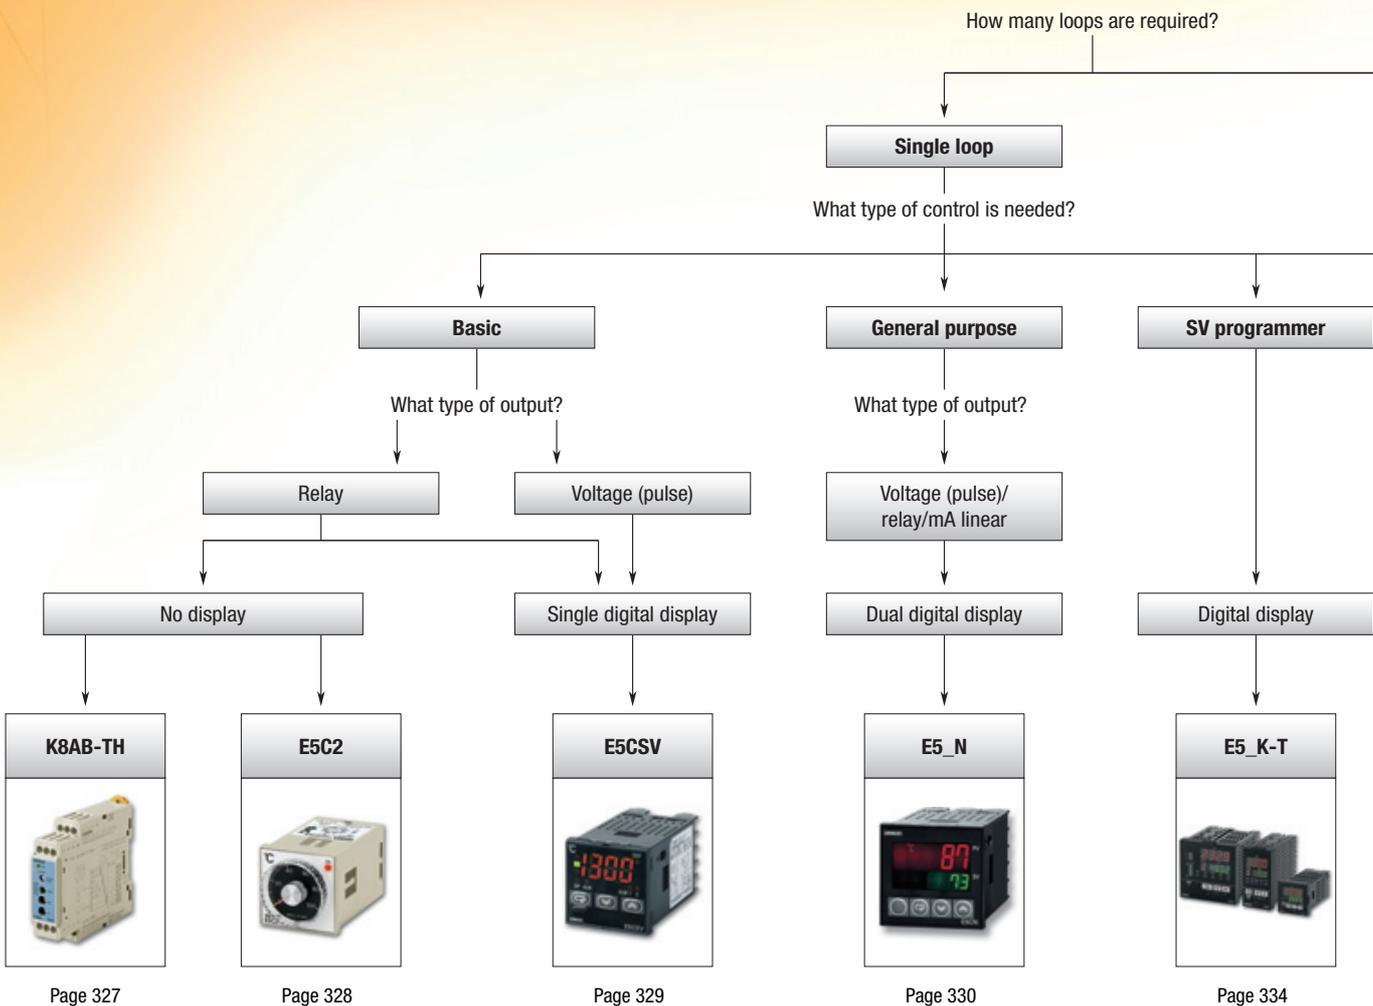

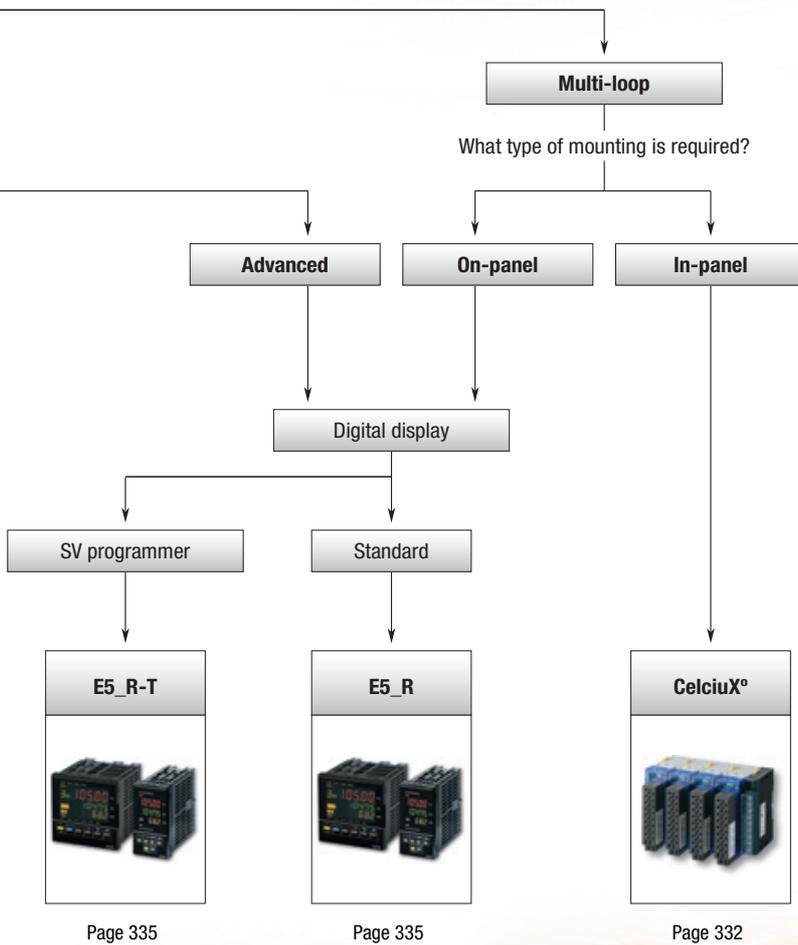

# Selection table

Category		Digital temperature controller							
		Alarm controller	Analog temperature controller	Compact digital temperature controller					
Selection criteria									
	Model	K8AB-TH	E5C2	E5CSV	E5AN	E5EN	E5CN	E5GN	
	Type	Basic			General purpose				
	Panel	In-panel type	In- & on-panel type		On-panel type				
	Loops	Single loop							
Control mode	Size	22.5 mm wide	1/16 DIN	1/16 DIN	1/4 DIN	1/8 DIN	1/16 DIN	1/32 DIN	
	ON/OFF	■	■	■	■	■	■	■	
	PID	–	■ <sup>*1</sup>	–	–	–	–	–	
	2-PID <sup>*2</sup>	–	–	■	■	■	■	■	
	Operation <sup>*3</sup>	–	H	H/C	H & C	H & C	H & C	H & C	
	Valve Control <sup>*4</sup>	–	–	–	–	–	–	–	
	Accuracy	±2%	–	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
	Auto-tuning	–	–	■	■	■	■	■	
Features	Self-tuning	–	–	■	■	■	■	■	
	Transfer output	–	–	–	□	□	□	–	
	Remote input	–	–	–	–	–	–	–	
	Number of alarms	1	–	1	3 <sup>*5</sup>	3 <sup>*5</sup>	3	1	
	Heater alarm	–	–	–	□	□	□ <sup>*5</sup>	□	
	IP rating front panel	IP20	IP40	IP65	IP66	IP66	IP66	IP66	
	Display	Rotary switch	SV dial	Single 3.5 digit	Dual 4 digit colour change	Dual 4 digit colour change	Dual 4 digit colour change	Dual 4 digit change	
	Supply voltage	110/240 VAC	■	■	■	■	■	■	
Comms <sup>*6</sup>	24 VAC/VDC	■	–	□	□	□	□	□	
	RS-232	–	–	–	□	□	–	–	
	RS-485	–	–	–	□	□	□	□	
	Event IP	■	–	–	□	□	□	–	
	QLP port	–	–	–	■	■	■	–	
Control output	DeviceNet	–	–	–	–	–	–	–	
	Relay	■	■	■	■	■	■	■	
	SSR	–	–	–	–	–	–	–	
	Voltage (pulse)	–	■	■	■	■	■	■	
	Linear voltage	–	–	–	–	–	–	–	
Input type – linear	Linear current	–	–	–	■	■	■	–	
	mA	–	–	–	□	□	□	□	
	mV	–	–	–	■	■	■	■	
	V	–	–	–	□	□	□	□	
	Input type – thermocouple	K	■	■	■	■	■	■	■
		J	■	–	■	■	■	■	■
		T	■	–	■	■	■	■	■
		E	■	–	–	■	■	■	■
		L	–	■	■	■	■	■	■
		U	–	–	■	■	■	■	■
N		–	–	■	■	■	■	■	
R		■	–	■	■	■	■	■	
S		■	–	–	■	■	■	■	
B		■	–	–	■	■	■	■	
Input type – RTD	W	–	–	–	–	–	–	–	
	PLII	■	–	–	–	–	–	–	
	Pt100	■	■	■	■	■	■	■	
	JPt100	–	–	■	■	■	■	■	
	THE	–	■	□	–	–	–		
Page	327	328	329	330					

<sup>\*1</sup> P only

<sup>\*2</sup> 2-PID is Omron's easy to use high-performance PID control

<sup>\*3</sup> H = heat, H/C = heat or cool, H & C = heat and cool

<sup>\*4</sup> Valve control = relay up and down

<sup>\*5</sup> Heater alarm = heater burnout & SSR failure detection

<sup>\*6</sup> PROFIBUS-DP communication option via gateway for E5\_N, E5\_R, E5ZN, ask your local Omron representative.

<sup>\*7</sup> Fuzzy PID available







## Protect your heating application

This temperature monitoring relay was designed specially for monitoring abnormal temperatures to prevent excessive temperature increase and to protect equipment. K8AB-TH provides temperature monitoring in slim design with a width of just 22.5 mm.

- Simple function settings using DIP switch
- Selectable alarm latch and SV setting protection
- Multi-input support for thermocouple or Pt100 sensor input
- Changeover relay: fail-safe selectable
- Alarm status identification with LED

## Ordering information

Input type	Temperature setting range	Setting unit	Supply voltage	Size in mm (HxWxD)	Order code
Thermocouple/ Pt100	0 to 399°C/F	1°C/F	100 to 240 VAC	90x22.5x100	K8AB-TH11S AC100-240
			24 VAC/VDC		K8AB-TH11S AC/DC24
Thermocouple	0 to 1,800°C 0 to 3,200 °F <sup>*1</sup>	10°C/F	100 to 240 VAC		K8AB-TH12S AC100-240
			24 VAC/VDC		K8AB-TH12S AC/DC24

\*1 Setting range depending on sensor type selected

## Specifications

Item	100 to 240 VAC 50/60 Hz	24 VAC 50/60 Hz or 24 VDC
Allowable voltage range	85 to 110% of power supply voltage	
Power consumption	5 VA max.	2 W max. (24 VDC), 4 VA max. (24 VAC)
Sensor inputs	<b>K8AB-TH11S</b> <b>K8AB-TH12S</b>	Thermocouple: K, J, T, E; platinum-resistance thermometer: Pt100 Thermocouple: K, J, T, E, B, R, S, PLII
Output relay	One SPDT relay (3 A at 250 VAC, resistive load)	
External inputs (for latch setting)	<b>Contact input</b> <b>Non-contact input</b>	ON: 1 kΩ 2 max., OFF: 100 kΩ 2 min. ON residual voltage: 1.5 V max., OFF leakage current: 0.1 mA max. Leakage current: Approx. 10 mA
Setting method	Rotary switch setting (set of three switches)	
Indicators	Power (PWR): Green LED, relay output (ALM): Red LED	
Other functions	Alarm mode (upper limit/lower limit), output normally ON/OFF selection, output latch, setting protection, fail-safe operation selectable, temperature unit°C/°F	
Ambient operating temperature	-10 to 55°C (with no condensation or icing); for 3-year guarantee: -10 to 50°C	
Storage temperature	-25 to 65°C (with no condensation or icing)	
Setting accuracy	±2% of full scale	
Hysteresis width	2°C	
Output relay	<b>Resistive load</b> <b>Inductive load</b> <b>Minimum load</b> <b>Maximum contact voltage</b> <b>Maximum contact current</b> <b>Maximum switching capacity</b> <b>Mechanical life</b> <b>Electrical life</b>	3 A at 250 VAC (cosφ = 1), 3 A at 30 VDC (L/R = 0 ms) 1 A at 250 VAC (cosφ = 0.4), 1 A at 30 VDC (L/R = 7 ms) 10 mA at 5 VDC 250 VAC 3 A AC 1,500 VA 10,000,000 operations Make: 50,000 times, break: 30,000 times
Sampling cycle	500 ms	
Weight	130 g	
Degree of protection	IP20	
Memory protection	Non-volatile memory (number of writes: 200,000)	
Safety standards	<b>Approved standards</b> <b>Application standards</b>	EN 61010-1 EN 61326 and EN 61010-1 (pollution level 2, overvoltage category II)
Crimp terminals	Two solid wires of 2.5 mm <sup>2</sup> or two ferrules of 1.5 mm <sup>2</sup> with insulation sleeves can be tightened together	
Case color	Munsell 5Y8/1 (ivory)	
Case material	ABS resin (self-extinguishing resin)	
Mounting	Mounted to DIN-rail or with M4 screws	
Size in mm (HxWxD)	90x22.5x100	



## Easy-to-use, basic temperature controller with analog dial setting

Omron's basic ON/OFF or PD controller features an analog setting dial. This compact, low-cost controller has a setting accuracy of 2% of full scale. It incorporates a plug-in socket allowing for DIN-rail or flush mounting.

- Compact, cost-effective controller
- Control mode: ON/OFF or PD
- Control output: relay
- Power supply: 100-120 / 200-240VAC
- Thermocouple K: 0 to 1200°C, L: 0 to 400°C, Pt100: -50 to 200°C

### Ordering information

Setting method	Indication method	Control mode	Output	Order code		
				Thermocouple	Platinum resistance thermometer Pt100	Thermistor THE
				K (CA) chromel vs. alumel	L (IC) iron vs. constantan	
Analog setting	No indication	ON/OFF	Relay	E5C2-R20K	E5C2-R20L-D	E5C2-R20P-D
		P	Relay	E5C2-R40K	E5C2-R40L-D	E5C2-R40P-D

Note: Specify either 100/110/120 VAC or 200/220/240 VAC when ordering.

Input ranges	Thermocouple *1		Platinum resistance thermometer	Thermistor *2
	K (CA) chromel vs. alumel	L (IC) iron vs. constantan	Pt100	THE
°C	0 to 200 (5), 0 to 300 (10), 0 to 400 (10), 0 to 600 (20), 0 to 800 (20), 0 to 1,000 (25), 0 to 1,200 (25)	0 to 200 (5), 0 to 300 (10), 0 to 400 (10), 5 to 450 (10)	-50 to 50 (2), -20 to 80 (2), 0 to 50 (1), 0 to 100 (2), 0 to 200 (5), 0 to 300 (10), 0 to 400 (10)	-50 to 50 (2) (6 kΩ at 0°C), 0 to 100 (2) (6 kΩ at 0°C), 50 to 150 (2) (30 kΩ at 0°C)

\*1 Values in ( ) are the minimum unit.

\*2 Values in ( ) are the thermistor resistive value.

### Accessories

Functions	Order code
Front connecting socket with finger protection	P2CF-08-E
Back connecting socket (for flush mounting)	P3G-08
Finger protection cover (for P3G-08)	Y92A-48G
Protective front cover (IP66)	Y92A-48B

### Specifications

Supply voltage	100/110/120 VAC or 200/220/240 VAC, 50/60 Hz
Thermocouple input type	K, L (with sensor break detection)
RTD input type	Pt100, THE
Control mode	ON/OFF or P control
Setting method	analog setting
Output	Relay, SPDT, 3 A at 250 VAC
Life expectancy	Electrical: 100,000 operations min.
Setting accuracy	±2% FS max.
Hysteresis	Approx. 0.5% FS (fixed)
Proportional band	3% FS (fixed)
Reset range	5 ±1% FS min.
Control period	20 s
IP Rating front panel	IP40 (IP66 cover available)
IP rating terminals	IP00
Ambient temperature	-10 to 55°C
Size in mm (HxWxD)	48x48x96

## The easy way to perfect temperature control



This multi-range 1/16 DIN controller with alarm function offers field-selectable PID control or ON/OFF control. The large, single display shows process value, direction of deviation from set point, output and alarm status.

- All setting field configurable with switches
- Multi-input (Thermocouple/Pt100)
- Clearly visible 3.5-digit display with character height of 13.5 mm
- Control output: relay, voltage (for driving SSR)
- ON/OFF or 2-PID control with auto-tuning and self-tuning

### Ordering information

Size in mm	Supply voltage	Number of alarm points	Control output	Order code
1/16 DIN 48Hx48Wx78D	100 to 240 VAC	1	Relay	E5CSV-R1T-500
			Voltage (for driving SSR)	E5CSV-Q1T-500
	24 VAC/VDC	1	Relay	E5CSV-R1TD-500
			Voltage (for driving SSR)	E5CSV-Q1TD-500

Note: Other models are available on request.

### Accessories

Type	Order code
Hard protective cover	Y92A-48B

### Specifications

<b>Supply voltage</b>	100 to 240 VAC, 50/60 Hz or 24 VAC/VDC (depending on model)
<b>Operating voltage range</b>	85 to 110% of rated supply voltage
<b>Power consumption</b>	5 VA
<b>Sensor input</b>	Multi-input (thermocouple/platinum resistance thermometer): K, J, L, T, U, N, R, Pt100, JPt100
<b>Control output</b>	<b>Relay output</b> SPST-NO, 250 VAC, 3 A (resistive load)
	<b>Voltage output (for driving SSR)</b> 12 VDC, 21 mA (with short-circuit protection circuit)
<b>Control method</b>	ON/OFF or 2-PID (with auto-tune and self-tune)
<b>Alarm output</b>	SPST-NO, 250 VAC, 1 A (resistive load)
<b>Setting method</b>	Digital setting using front panel keys (functionality set-up with DIP switch)
<b>Indication</b>	7-segment digital display (character height: 13.5 mm) and deviation indicators
<b>Ambient temperature</b>	-10 to 55°C (with no condensation or icing)
<b>Setting/indication accuracy</b>	±0.5% of indication value or ±1 °C, whichever is greater ±1 digit max.
<b>Hysteresis (for ON/OFF control)</b>	0.2% FS (0.1% FS for multi-input (thermocouple/platinum resistance thermometer) models)
<b>Proportional band (P)</b>	1 to 999°C (automatic adjustment using AT/ST)
<b>Integral time (I)</b>	0 to 1,999 s (automatic adjustment using AT/ST)
<b>Derivative time (D)</b>	0 to 1,999 s (automatic adjustment using AT/ST)
<b>Control period</b>	2/20 s
<b>Sampling period</b>	500 ms
<b>Electrical life expectancy</b>	100,000 operations min. (relay output models)
<b>Weight</b>	Approx. 120 g (controller only)
<b>Degree of protection</b>	Front panel: Equivalent to IP66; rear case: IP20; terminals: IP00
<b>Memory protection</b>	EEPROM (non-volatile memory) (number of writes: 1,000,000)
<b>Size in mm (HxWxD)</b>	48x48x78



## Compact and intelligent general-purpose controllers

The E5\_N general-purpose line of temperature controllers is available in 4 standard DIN formats. They all feature a high-intensity dual LCD display with a wide viewing angle. Except for the E5GN, the series features 3-colour PV change for easy status recognition.

- Control mode: ON/OFF or 2-PID
- Control output: relay, hybrid relay, voltage (pulse) or linear current
- Power supply: 100/240VAC or 24VDC/VAC
- Easy PC connection for parameter cloning, setting and tuning
- Easy set-up and operation



### Ordering information

Type	Input	Output	Fixed option	Alarms	Order code					
					48x24 mm model		Supply voltage			
					Thermocouple	Pt100, JPt100				
On-panel	-	relay	-	1	E5GN-R1TC	E5GN-R1P	AC100-240	or DC/AC 24		
		voltage (pulse)			E5GN-Q1TC	E5GN-Q1P	AC100-240	or DC/AC 24		
		relay			RS-485 communication	0	E5GN-R03TC-FLK	E5GN-R03P-FLK	AC100-240	or DC/AC 24
		voltage (pulse)			E5GN-Q03TC-FLK		E5GN-Q03P-FLK	AC100-240	or DC/AC 24	
Type	Input	Output	Fixed option	Alarms	Order code					
					48x48 mm model		Supply voltage			
On-panel	temperature (TC/Pt/mV)	relay	-	2	E5CN-R2MT-500		AC100-240	or DC/AC 24		
		voltage (pulse)			E5CN-Q2MT-500		AC100-240	or DC/AC 24		
		linear current			E5CN-C2MT-500		AC100-240	or DC/AC 24		
		hybrid relay			E5CN-Y2MT-500		AC100-240	-		
	analog (mA/V)	relay			E5CN-R2ML-500		AC100-240	or DC/AC 24		
		voltage (pulse)			E5CN-Q2ML-500		AC100-240	or DC/AC 24		
		linear current			E5CN-C2ML-500		AC100-240	or DC/AC 24		
		hybrid relay			E5CN-Y2ML-500		AC100-240	-		
In-panel	temperature (TC/Pt/mV)	relay	-	2	E5CN-R2TU		AC100-240	or DC/AC 24		
		voltage (pulse)			E5CN-Q2TU		AC100-240	or DC/AC 24		
Type	Input	Output	Fixed option	Alarms	Order code					
					48x96 mm model		96x96 mm model		Supply voltage	
On-panel	temperature (TC/Pt/mV)	linear current	-	3	E5EN-C3MT-500	E5AN-C3MT-500	AC100-240	or DC/AC 24		
			hybrid relay		E5EN-C3YMT-500	E5AN-C3YMT-500	AC100-240	-		
			voltage (pulse)		E5EN-C3QMT-500	E5AN-C3QMT-500	AC100-240	-		
					E5EN-Q3MT-500	E5AN-Q3MT-500	AC100-240	or DC/AC 24		
		voltage (pulse)	hybrid relay		E5EN-Q3YMT-500	E5AN-Q3YMT-500	AC100-240	-		
			voltage (pulse)		E5EN-Q3QMT-500	E5AN-Q3QMT-500	AC100-240	-		
			heater alarm		E5EN-Q3HMT-500	E5AN-Q3HMT-500	AC100-240	or DC/AC 24		
			3-phase HA		E5EN-Q3HHMT-500	E5AN-Q3HHMT-500	AC100-240	-		
	relay	power supply	E5EN-Q3PMT-500	-	AC100-240	-				
		-	E5EN-R3MT-500	E5AN-R3MT-500	AC100-240	or DC/AC 24				
		voltage (pulse)	E5EN-R3QMT-500	E5AN-R3QMT-500	AC100-240	-				
		heater alarm	E5EN-R3HMT-500	E5AN-R3HMT-500	AC100-240	or DC/AC 24				
		3-phase HA	E5EN-R3HHMT-500	E5AN-R3HHMT-500	AC100-240	-				
		power supply	E5EN-R3PMT-500	-	AC100-240	-				
		analog (mA/V)	linear current	-	3	E5EN-C3ML-500	-	AC100-240	-	
				voltage (pulse)		E5EN-Q3ML-500	-	AC100-240	-	
hybrid relay	E5EN-Q3YML-500			-		AC100-240	-			
heater alarm	E5EN-Q3HML-500			E5AN-Q3HML-500		AC100-240	-			
relay	-		E5EN-R3ML-500	-		AC100-240	-			
	heater alarm		E5EN-R3HML-500	E5AN-R3HML-500		AC100-240	-			

#### Note: - Output relay: 3 A/250 VAC, electrical life: 100,000 operations

- Output voltage (pulse): 12 V, 21 mA
- Hybrid relay (long life relay) electrical life 1,000,000 operations
- Linear current: 0(4) to 20 mA
- Heater alarm = heater burnout + SSR short detection
- Voltage: Specify the power supply specifications (voltage) when ordering

Option boards on next page

## Accessories

## E5CN option boards

(One slot available in each instrument; do not fit in E5CN-U types)

Option				Order code
RS-485	heater alarm	–	–	E53-CNHO3N
RS-485	–	–	–	E53-CN03N
–	heater alarm	event input	–	E53-CNHBN
–	–	event input	–	E53-CNBN
RS-485	3-phase HA	–	–	E53-CNHH03N
RS-485	–	–	voltage (pulse)	E53-CNQ03N
–	heater alarm	–	voltage (pulse)	E53-CNQH0N
–	–	event input	power supply 12 VDC/20 mA	E53-CNPNB
–	heater alarm	–	power supply 12 VDC/20 mA	E53-CNPHN

## E5AN/-EN option boards

(one slot available in each instrument)

Option	Order code
RS-232 communications (CompoWay/F/Modbus)	E53-EN01
RS-485 communications (CompoWay/F/Modbus)	E53-EN03
event input	E53-AKB

## E5\_N series optional tools

Option	Order code
USB PC based configuration cable	E58-CIFQ1
PC based configuration and tuning software	CX-Thermo
PC based parameter cloning software (free)	ThermoMini
Standard 11 pin socket for E5CN-___U type	P2CF-11-E



## Specifications

Supply voltage	100 to 240 VAC
Heater alarm	yes, optional; 1 + 3-phase option
Thermocouple input type	K, J, T, E, L, U, N, R, S, B
RTD input type	Pt100, JPt100
Linear input type	mV, mA (optional), V (not for -GN)
Control mode	ON/OFF, 2-PID, heat and/or cool
Accuracy	±0.5% of indicated value
Auto-tuning	yes
Self-tuning	yes
RS-232	-AN/-EN: Optional
RS-485	optional
Event input	optional (not for -GN)
QLP port (USB connection PC)	yes (not for -GN)
Ambient temperature	-10 to 55°C
IP Rating front panel	IP66
Sampling period	500 ms for -GN, 250 ms for -CN, -EN, -AN



## CelciuX° - Multi-Loop temperature control – Control and Connectivity

CelciuX° is designed to handle complex temperature profiles thanks to Omron's unique Gradient temperature Control (GTC) algorithm and to offer easy program-less communication with Omron and third-party PLCs and HMI. Above all, CelciuX° incorporates all "simple to use" clever temperature control technology, like 2-PID, disturbance control and various ways of tuning.

- Interfaces to a wide range of industrial networks
- Reduced engineering due to Programm-less communications, Smart Active Parts and Function Block Libraries
- Available with screw terminals and screw-less clamp terminals
- One unit handling various types of input, such as Pt, Thermocouple, mA, and V input
- Gradient Temperature Control (GTC)



### Ordering information

Type	Control points	Control outputs	Auxiliary outputs	Other functions	Terminal	Order code
Basic unit	2	2 voltage (puls)	2 transistor (NPN) <sup>*1</sup>	2 CT input <sup>*2</sup> + 2 event input	M3 screws	EJ1N-TC2A-QNHB
Basic unit	2	2 voltage (puls)	2 transistor (NPN) <sup>*1</sup>	2 CT input <sup>*2</sup> + 2 event input	Screw-less clamp	EJ1N-TC2B-QNHB
Basic unit	2	2 current	2 transistor (NPN) <sup>*1</sup>	2 event input	M3 screws	EJ1N-TC2A-CNB
Basic unit	2	2 current	2 transistor (NPN) <sup>*1</sup>	2 event input	Screw-less clamp	EJ1N-TC2B-CNB
Basic unit	4	4 voltage (puls)	–	–	M3 screws	EJ1N-TC4A-QQ
Basic unit	4	4 voltage (puls)	–	–	Screw-less clamp	EJ1N-TC4B-QQ
High function unit	–	–	4 transistor (NPN)	4 event input	M3 screws	EJ1N-HFUA-NFLK
High function unit	–	–	4 transistor (NPN)	4 event input	Screw-less clamp	EJ1N-HFUB-NFLK
End unit <sup>*3</sup>	–	–	2 transistor (NPN)	–	M3 screws	EJ1C-EDUA-NFLK

<sup>\*1</sup> For heating/cooling control applications, the auxiliary outputs on the 2-point models are used for cooling control. On the 4-point models, heating/cooling control can be performed for two input points only.  
<sup>\*2</sup> When using the heater burnout alarm, purchase a Current Transformer (E54-CT1 or E54-CT3) separately.  
<sup>\*3</sup> An End Unit is always required for connection to a Basic Unit or an HFU. An HFU cannot operate without a Basic Unit.

Type	Control points	Control outputs	Auxiliary outputs	Other functions	Terminal	Order code
Basic unit	2 (GTC)	2 voltage (puls)	2 transistor (NPN)	2 CT input <sup>*3</sup>	M3 screws	EJ1G-TC2A-QNH
Basic unit	2 (GTC)	2 voltage (puls)	2 transistor (NPN)	2 CT input <sup>*3</sup>	Screw-less clamp	EJ1G-TC2B-QNH
Basic unit	4 (GTC)	4 voltage (puls)	–	–	M3 screws	EJ1G-TC4A-QQ
Basic unit	4 (GTC)	4 voltage (puls)	–	–	Screw-less clamp	EJ1G-TC4B-QQ
High function unit	– (GTC)	–	4 transistor (NPN)	–	M3 screws	EJ1G-HFUA-NFLK
High function unit	– (GTC)	–	4 transistor (NPN)	–	Screw-less clamp	EJ1G-HFUB-NFLK
End unit	–	–	2 transistor (NPN)	–	M3 screws	EJ1C-EDUA-NFLK

<sup>\*1</sup>. An End Unit is required to connect an HFU to a Basic Unit. A Gradient Temperature Control HFU and a Gradient Temperature Control Basic Unit must be used together to achieve gradient temperature control. The Gradient Temperature Control HFU and Gradient Temperature Control Basic Unit are used exclusively for gradient temperature control, but the End Unit is the same as that used for the Standard-control EJ1 Models.  
 A GTC basic unit always require a GTC high function unit.  
<sup>\*2</sup>. Heating/cooling control is not supported for gradient temperature control.  
<sup>\*3</sup>. When using the heater burnout alarm, use a Current Transformer (E54-CT1 or E54-CT3) (sold separately).

### Accessories

#### Current transformer

Diameter	Order code
5.8 dia.	E54-CT1
12.0 dia.	E54-CT3

#### Communications and cables

Description	Order code
G3ZA connecting cable 5 meter	EJ1C-CBLA050
USB programming cable	E58-CIFQ1
CX-Thermo support software	EST2-2C-MV3
PROFIBUS Gateway	PRT1-SCU11

Specifications

Item	EJ1_-TC2	EJ1_-TC4
Supply voltage	24 VDC	
Operating voltage range	85% to 110% of rated supply voltage	
Power consumption	4 W (at maximum load)	5 W (at maximum load)
Sensor input	UNIVERSAL INPUTS on all channels, all configurable individually, Thermocouple: K, J, T, E, L, U, N, R, S, B, W, PLII ES1B Infrared Thermosensor: 10 to 70°C, 60 to 120°C, 115 to 165°C, 140 to 260°C. Analog input: 4 to 20 mA, 0 to 20 mA, 1 to 5 V, 0 to 5 V, 0 to 10 V, Platinum resistance thermometer: Pt100, JPt100	
Sampling period	250 ms	
Indication	LED indicators	
Setting/indication accuracy	±0.5% of indication value or ±1°C, whichever is greater ±1 digit max.	
Control output	Voltage (puls)	12 VDC ±15% max, 21 mA (with short-circuit protection circuit)
	Transistor	2 points operating, max 30 V and 100 mA
Other control features	2 control points, 2 inputs, 2CT inputs	4 control points, 4 inputs
Control method	ON/OFF or 2-PID (with auto-tune)	
Other control features	Two-point input shift, digital input filter, remote SP, SP ramp, manual manipulated variable, manipulated variable limiter, interference overshoot adjustment, loop burnout alarm, RUN/STOP, banks, I/O allocations, etc.	
Alarm output	2 points via End Unit	
Communication	RS-485, PROFIBUS, Modbus	RS-485, PROFIBUS, Modbus
Size in mm (WxHxD)	31x96x109	
Weight	180 g	
Ambient temperature	operating -10°C to 55°C, stored -25°C to 65°C (with no condensation or icing)	
Degree of protection	Rear Case IP20, Terminal section IP00	

Note: DeviceNet 1H of 2007



## Advanced compact digital process controllers

The E5\_K series of advanced controllers provides standard models and models with programmer functionality. The modular structure of the series makes it very versatile. A number of tuning functions are provided, including auto-tuning, self-tuning and fuzzy self-tuning.

- Size in mm (HxWxD): 96x48x100/53x53x100/96x96x100
- Control mode: ON/OFF or PID
- Control output: relay, SSR, voltage or current
- Universal inputs (Pt100/Thermocouple/Volt/Milliampere)
- Supported by ThermoTools PC Software

### Ordering information

Specification	Alarms	Order code		
		Standard model	Programmer model 48x48 mm	Supply voltage
Base unit with terminal cover	1	E5CK-AA1-500	E5CK-TAA1-500	AC100-240 or DC/AC 24
Specification	Alarms	Standard model	Programmer model 48x96 mm	Supply voltage
Standard model with terminal cover	2	E5EK-AA2-500	E5EK-TAA2-500	AC100-240 or DC/AC 24
Position-proportional model with terminal cover		E5EK-PRR2-500	E5EK-TPRR2-500	
Standard mode with terminal cover and DeviceNet		E5EK-AA2-DRT-500		AC100-240
Specification	Alarms	Standard model	Programmer model 96x96 mm	Supply voltage
Standard model with terminal cover	2	E5AK-AA2-500	E5AK-TAA2-500	AC100-240 or DC/AC 24
Position-proportional model with terminal cover		E5AK-PRR2-500	E5AK-TPRR2-500	

Note: A single output unit and option unit can be mounted to each E5CK base unit.

### Option Units

Model	Name	Specification	Order code	Model	Name	Specification	Order code	
E5CK	Output units	Relay/relay	E53-R4R4	E5AK E5EK	Output units	Relay	E53-R	
		Pulse (NPN)/relay	E53-Q4R4			SSR	E53-S	
		Pulse (PNP)/relay	E53-Q4HR4			Pulse (NPN) 12 VDC	E53-Q	
		Linear (4 to 20 mA)/relay	E53-C4R4			Pulse (NPN) 24 VDC	E53-Q3	
		Linear (0 to 20 mA)/relay	E53-C4DR4			Pulse (PNP) 24 VDC	E53-Q4	
		Linear (0 to 10 V)/relay	E53-V44R4			Linear (4 to 20 mA)	E53-C3	
		Pulse (NPN)/pulse (NPN)	E53-Q4Q4			Linear (0 to 20 mA)	E53-C3D	
		Pulse (PNP)/pulse (PNP)	E53-Q4HQ4H			Linear (0 to 10 V)	E53-V34	
	Option units	RS-232C	E53-CK01			Linear (0 to 5 V)	E53-V35	
		RS-485	E53-CK03			Option units	Event input	E53-AKB
		Event input: 1 point	E53-CKB				Communication (RS-232C)	E53-EN01
		Transfer output (4 to 20 mA)	E53-CKF				Communication (RS-422)	E53-EN02
							Communication (RS-485)	E53-EN03
		Transfer output	E53-AKF					

### Specifications

Heater burnout	Optional, CK: loop burnout
Thermocouple input type	K, J, T, E, L, U, N, R, S, B, W, PLII
RTD input type	Pt100, JPt100
Linear input type	mA, 0 to 50 mV
Control mode	2-PID or ON/OFF control
Accuracy	0.3% FS, 1 digit max.
Self-tuning	yes
Auto-tuning	yes
RS-485	optional
Event input	optional
Ambient temperature	-10 to 55°C
IP rating front panel	IP66
Sampling period	Temperature input: 250 ms Linear input: 100 ms



## Fast, accurate and customizable to applications-specific needs

The E5\_R series provides you with high-accuracy inputs (0.01°C for Pt100) and a 50 ms sample and control cycle for all four loops. Its unique Disturbance Overshoot Reduction Adjustment ensures solid, robust control.

- Easy and clear read-out thanks to bright liquid Crystal Display
- Exceptional versatility – multi-loop control, cascade control, and valve control
- Easy integration with DeviceNet, PROFIBUS or Modbus
- SV programmer optional, 32 programs with up to 256 segments



### Ordering information

Functions	Loops	Input		Output		Comms	Order code	
		analog	Event	Control	Alarm		96x96 mm	Supply voltage
standard	1	1	2	2 QC+Q	4R	–	E5AR-Q4B	AC100-240 or DC/AC 24
standard	1	1	2	2 QC+Q	4R	RS-485	E5AR-Q43B-FLK	AC100-240 –
standard	1	1	6	2 QC+Q	4R	RS-485	E5AR-Q43DB-FLK	AC100-240 –
standard	1	1	6	4 QC+Q+C+C	4R	RS-485	E5AR-QC43DB-FLK	AC100-240 or DC/AC 24
standard	max 2	2	4	2 QC+Q	4R	RS-485	E5AR-Q43DW-FLK	AC100-240 –
standard	max 2	2	4	4 QC+Q+QC+Q	4R	RS-485	E5AR-QQ43DW-FLK	AC100-240 or DC/AC 24
standard	max 4	4	4	4 QC+Q+QC+Q	4R	RS-485	E5AR-QQ43DWW-FLK	AC100-240 –
standard	1	1	2	2 C+C	4R	–	E5AR-C4B	AC100-240 or DC/AC 24
standard	1	1	2	2 C+C	4R	RS-485	E5AR-C43B-FLK	AC100-240 –
standard	1	1	6	2 C+C	4R	RS-485	E5AR-C43DB-FLK	AC100-240 –
standard	max 2	2	4	2 C+C	4R	RS-485	E5AR-C43DW-FLK	AC100-240 –
standard	max 4	4	4	4 C+C+C+C	4R	RS-485	E5AR-CC43DWW-FLK	AC100-240 or DC/AC 24
valve	1	1 + pot	4	2 R+R	4R	–	E5AR-PR4DF	AC100-240 or DC/AC 24
valve	1	1 + pot	4	4 R+R+QC+Q	4R	RS-485	E5AR-PRQ43DF-FLK	AC100-240 or DC/AC 24
standard	1	1	2	2 QC+Q	4R	DeviceNet	E5AR-Q4B-DRT	AC100-240 or DC/AC 24
standard	1	1	2	4 QC+Q+C+C	4R	DeviceNet	E5AR-QC4B-DRT	AC100-240 or DC/AC 24
standard	max 2	2	–	4 QC+Q+QC+Q	4R	DeviceNet	E5AR-QQ4W-DRT	AC100-240 or DC/AC 24
standard	1	1	2	2 C+C	4R	DeviceNet	E5AR-C4B-DRT	AC100-240 or DC/AC 24
standard	max 4	4	–	4 C+C+C+C	4R	DeviceNet	E5AR-CC4WW-DRT	AC100-240 or DC/AC 24
valve	1	1 + pot	–	2 R+R	4R	DeviceNet	E5AR-PR4F-DRT	AC100-240 or DC/AC 24
valve	1	1 + pot	–	4 R+R+QC+Q	4R	DeviceNet	E5AR-PRQ4F-DRT	AC100-240 or DC/AC 24
SV programmer	1	1	2	2 QC+Q	4R	–	E5AR-TQ4B	AC100-240 or DC/AC 24
SV programmer	1	1	2	2 C+C	4R	–	E5AR-TC4B	AC100-240 or DC/AC 24
SV programmer	1	1	2	2 QC+Q	4R	RS-485	E5AR-TQ43B-FLK	AC100-240 –
SV programmer	1	1	2	2 C+C	4R	RS-485	E5AR-TC43B-FLK	AC100-240 –
SV programmer	1	1	10	2 QC+Q	10T	RS-485	E5AR-TQE3MB-FLK	AC100-240 –
SV programmer	1	1	10	2 C+C	10T	RS-485	E5AR-TCE3MB-FLK	AC100-240 –
SV programmer	1	1	10	4 QC+Q+C+C	10T	RS-485	E5AR-TQCE3MB-FLK	AC100-240 or DC/AC 24
SV programmer	max 2	2	4	2 QC+Q	4R	RS-485	E5AR-TQ43DW-FLK	AC100-240 –
SV programmer	max 2	2	4	2 C+C	4R	RS-485	E5AR-TC43DW-FLK	AC100-240 –
SV programmer	max 2	2	8	4 QC+Q+QC+Q	10T	RS-485	E5AR-TQQE3MW-FLK	AC100-240 or DC/AC 24
SV programmer	max 4	4	8	4 C+C+C+C	10T	RS-485	E5AR-TCCE3MWW-FLK	AC100-240 or DC/AC 24
SV programmer	max 4	4	8	4 QC+Q+QC+Q	10T	RS-485	E5AR-TQQE3MWW-FLK	AC100-240 –
SV programmer + valve	1	1 + pot	4	2 R+R	4R	–	E5AR-TPR4F	AC100-240 or DC/AC 24
SV programmer + valve	1	1 + pot	8	4 R+R+QC+Q	10T	RS-485	E5AR-TPRQE3MF-FLK	AC100-240 or DC/AC 24

**Note:** - Voltage: Specify the power supply specifications (voltage) when ordering.

- Standard = heat and/or cool PID control, valve = valve positioning (relay up/down) (PRR)

- max 2 = 2 loops heat and/or cool or 1 loop cascade, ratio or remote SP

- max 4 = 4 loops heat and/or cool

- 1, 2 or 4 = number of analog universal input 1 + pot = 1 universal and 1 slide wire feedback from valve

- QC = voltage (pulse) or current (switch), Q = voltage (pulse), C = current, 4R = 4 two pole relay, 2T = two transistor output NPN

Functions	Loops	Input		Output		Comms	Order code			
		analog	Event	Control	Alarm		48x96 mm	Supply voltage		
standard	1	1	2	2	QC+Q	4R	–	E5ER-Q4B	AC100-240	or DC/AC 24
standard	1	1	2	2	QC+Q	4R	RS-485	E5ER-Q43B-FLK	AC100-240	–
standard	1	1	2	4	QC+Q+C+C	4R	RS-485	E5ER-QC43B-FLK	AC100-240	or DC/AC 24
standard	1	1	6	2	QC+Q	2T	RS-485	E5ER-QT3DB-FLK	AC100-240	–
standard	max 2	2	4	2	QC+Q	2T	RS-485	E5ER-QT3DW-FLK	AC100-240	or DC/AC 24
standard	1	1	2	2	C+C	4R	–	E5ER-C4B	AC100-240	or DC/AC 24
standard	1	1	2	2	C+C	4R	RS-485	E5ER-C43B-FLK	AC100-240	–
standard	1	1	6	2	C+C	2T	RS-485	E5ER-CT3DB-FLK	AC100-240	–
standard	max 2	2	4	2	C+C	2T	RS-485	E5ER-CT3DW-FLK	AC100-240	or DC/AC 24
valve	1	1 + pot	4	2	R+R	2T	–	E5ER-PRTDF	AC100-240	or DC/AC 24
valve	1	1 + pot	–	4	R+R+QC+Q	4R	RS-485	E5ER-PRQ43F-FLK	AC100-240	or DC/AC 24
standard	1	1	2	2	QC+Q	2T	DeviceNet	E5ER-QTB-DRT	AC100-240	or DC/AC 24
standard	max 2	2	–	2	QC+Q	2T	DeviceNet	E5ER-QTW-DRT	AC100-240	or DC/AC 24
standard	1	1	2	2	C+C	2T	DeviceNet	E5ER-CTB-DRT	AC100-240	or DC/AC 24
standard	max 2	2	–	2	C+C	2T	DeviceNet	E5ER-CTW-DRT	AC100-240	or DC/AC 24
valve	1	1 + pot	–	2	R+R	2T	DeviceNet	E5ER-PRTF-DRT	AC100-240	or DC/AC 24
SV programmer	1	1	2	2	QC+Q	4R	–	E5ER-TQ4B	AC100-240	or DC/AC 24
SV programmer	1	1	2	2	C+C	4R	–	E5ER-TC4B	AC100-240	or DC/AC 24
SV programmer	1	1	2	2	QC+Q	4R	RS-485	E5ER-TQC43B-FLK	AC100-240	or DC/AC 24
SV programmer	max 2	2	4	2	QC+Q	2T	RS-485	E5ER-TQT3DW-FLK	AC100-240	or DC/AC 24
SV programmer	max 2	2	4	2	C+C	2T	RS-485	E5ER-TCT3DW-FLK	AC100-240	or DC/AC 24
SV programmer + valve	1	1 + pot	4	2	R+R	2T	–	E5ER-TPRTDF	AC100-240	or DC/AC 24
SV programmer + valve	1	1 + pot	–	3	R+R + QC	4R	RS-485	E5ER-TPRQ43F-FLK	AC100-240	or DC/AC 24

**Note:- Voltage: Specify the power supply specifications (voltage) when ordering.**

- Standard = heat and/or cool PID control, valve = valve positioning (relay up/down) (PRR)
- max 2 = 2 loops heat and/or cool or 1 loop cascade, ratio or remote SP
- max 4 = 4 loops heat and/or cool
- 1, 2 or 4 = number of analog universal input 1 + pot = 1 universal and 1 slide wire feedback from valve
- QC = voltage (pulse) or current (switch), Q = voltage (pulse), C = current, 4R = 4 two pole relay, 2T = two transistor output NPN

## Accessories

Terminal covers	Order code
Terminal cover for E5AR	E53-COV14
Terminal cover for E5ER	E53-COV15

## Specifications

Thermocouple input type	K, J, T, E, L, U, N, R, S, B, W
RTD input type	Pt100
Linear input type	mA, V
Control mode	2-PID or ON/OFF control
Accuracy	±0.1% FS
Auto-tuning	yes
RS-485	optional
Event input	optional
Ambient temperature	-10 to 55°C
IP rating front panel	IP66
Sampling period	50 ms
Size in mm (HxWxD)	E5ER: 96x48x110 E5AR: 96x96x110



### Omron's intelligent PROFIBUS and CompoWay/F gateway

This gateway supports all CompoWay/F equipped products, including temperature controllers, digital panel indicators, etc. It can also be used for connecting MCW151-E and E5\_K series.

- Cost-effectively integrates basic instruments into a PROFIBUS network
- Requires no complex protocol conversion writing
- Has function blocks for drag-and-drop configuration
- Connects up to 15 instruments to a single PROFIBUS point



#### Ordering information

Name	Order code
PROFIBUS remote terminal serial communications unit	PRT1-SCU11

Supports all CompoWay/F equipped units, but has "drag-and-drop" function blocks for

- E5AN/E5EN/E5CN/E5GN
- E5ZN and CelciuX° (EJ1)
- E5AR/E5ER
- E5AK/E5EK
- R88-MCW151-E
- F7 varispeed drives

#### Specifications

Storage temperature	-20 to +75°C
Ambient temperature	0 to 55°C
Ambient humidity	10 to 90% (non-condensing)
EMC compliance	EN 50081-2, EN 61131-2
Power supply	+24 VDC (+10%/-15%) Current consumption 80 mA (typical)
Weight	125 g (typical)
Communication interface	RS-485 based PROFIBUS-DP RS-422A Host link RS-485 CompoWay/F RS-232C Peripheral Port supporting connection to thermotools
Size in mm (HxWxD)	90x40x65

### ES1B



### Achieve low-cost measurements with an infrared thermosensor


This infrared thermosensor provides an accurate, stable and cost-effective way to measure the temperature of objects. It behaves just like a standard K-type thermocouple, which enables it to operate with any temperature controller or alarm unit.

- Cost-effective infrared thermosensor
- Contactless, meaning no deterioration, unlike thermocouples
- 4 temperature ranges available: 10-70°C, 60-120°C, 115-165°C and 140-260°C
- Response speed 300 ms

#### Ordering information

Appearance and sensing characteristics	Specification	Order code
	10 to 70°C	ES1B 10-70C
	60 to 120°C	ES1B 115-165C
	155 to 165°C	ES1B 140-260C
	140 to 260°C	ES1B 60-120C

#### Dimensions (unit: mm)

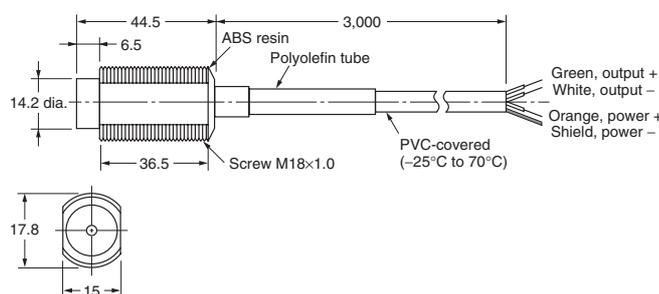

#### Specifications


Power supply voltage	12/24 VDC
Current consumption	20 mA max.
Accuracy	±5°C: ±2% PV or ±2°C, whichever is larger ±10°C: ±4% PV or ±4°C, whichever is larger ±30°C: ±6% PV or ±6°C, whichever is larger ±40°C: ±8% PV or ±8°C, whichever is larger
Reproducibility	±1% PV or ±1°C, whichever is larger
Temperature drift	0.4°C/°C max.
Receiver element	Thermopile
Response speed	Approximately 300 ms at response rate of 63%
Operating temperature	-25 to 70°C (with no icing or condensation)
Allowable ambient humidity	35 to 85%
Degree of protection	IP65
Size in mm	head: 17.8 dia. x 44.5 (screw M18x1.0), cable 3,000


# PREVENT YOUR SYSTEM FROM STOPPING

## S8TS-DCBU-02 – Buffer block against momentary power failures

The buffer block prevents equipment stoppage, data loss and other problems resulting from momentary power failures. One S8TS-DCBU-02 buffer block provides a back-up time of 500 ms at an output current of 2.5 A. Can be wired to the 24 VDC output from any switch mode power supply

- Connects to both single-phase and three-phase 24 VDC power supplies
- Connects to an S8TS power supply via an S8T-BUS03 bus line connector
- Parallel connection up to 4 units to increase back-up time and capacity

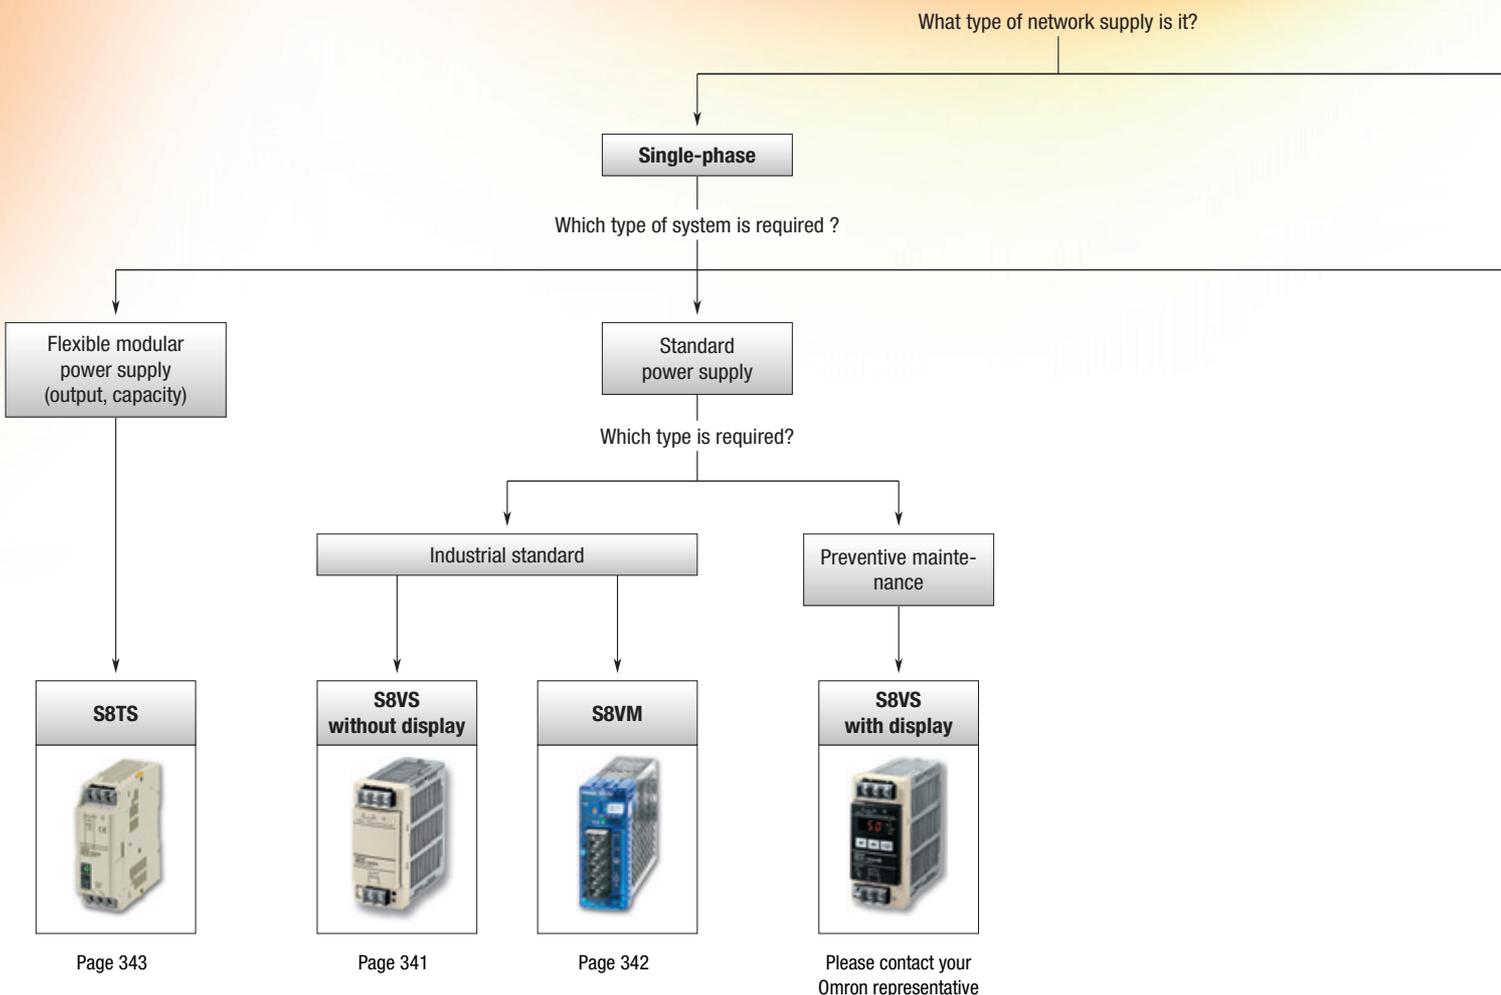

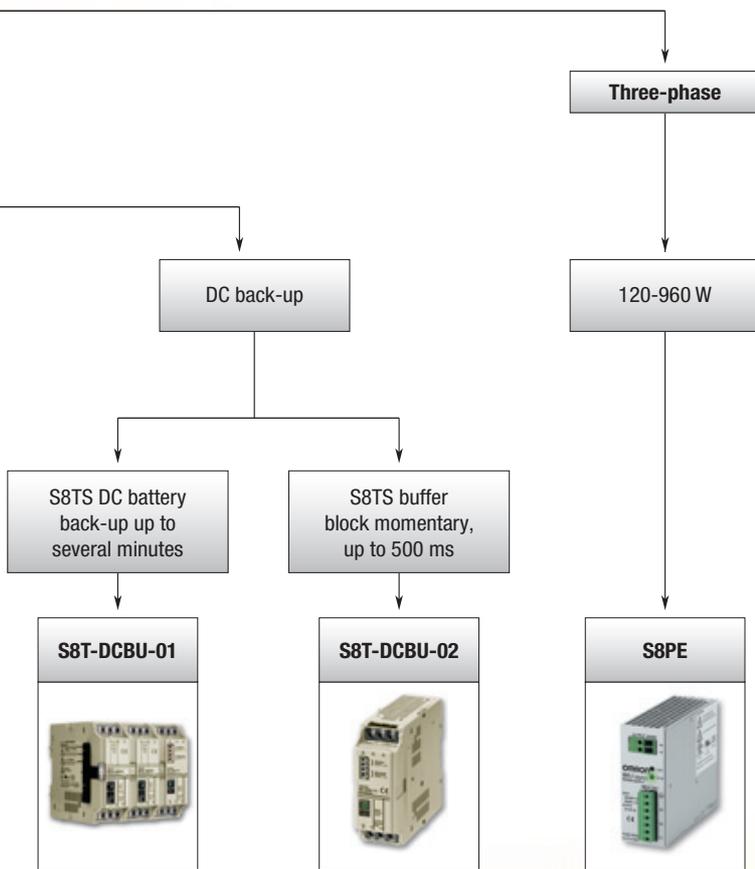

Page 345

Page 345

Please contact your Omron representative

Category		Industrial standard			Modular			High power
Selection criteria								
	Model	<b>S8VS</b>	<b>S8VM</b>		<b>S8TS</b>			<b>S8VT</b>
	Phases	Single-phase						Three-phase
	Rated voltage	100 to 240 VAC						400 to 500 VAC
Power	Voltage	24 V	12 V	24 V	5 V	12 V	24 V	24 V
	3 W	–	–	–	–	–	–	–
	7.5 W	–	–	–	–	–	–	–
	10 W	–	–	–	–	–	–	–
	15 W	–	■ 1.3 A	■ 0.65 A	–	–	–	–
	25 W	–	–	–	■ 5 A	–	–	–
	30 W	–	■ 2.5 A	■ 1.3 A	–	■ 2.5 A	–	–
	50 W	–	■ 4.3 A	■ 2.2 A	–	–	–	–
	60 W	■ 2.5 A	–	–	–	■ 5 A	■ 2.5 A	–
	90 W	■ 3.75 A	–	–	–	■ 7.5 A	–	–
	100 W	–	■ 8.5 A	■ 4.5 A	–	–	–	–
	120 W	■ 5 A	–	–	–	■ 10 A	■ 5 A	■ 5 A
	150 W	–	■ 12.5 A	■ 6.5 A	–	–	–	–
	180 W	■ 7.5 A	–	–	–	–	■ 7.5 A	–
	240 W	■ 10 A	–	–	–	–	■ 10 A	■ 10 A
	300 W	–	■ 27 A	■ 14 A	–	–	–	–
	480 W	–	–	–	–	–	–	■ 20 A
	600 W	–	■ 53 A	■ 27 A	–	–	–	–
	960 W	–	–	–	–	–	–	■ 40 A
1500 W	–	–	■ 70 A	–	–	–	–	
Features	Conforms to EN61000-3-2 A14	■ with PFC	–	–	■ with PFC	■ with PFC	■ with PFC	■
	DC back-up	–	–	–	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	–
	Capacitor back-up	<input type="checkbox"/>	–	–	–	–	<input type="checkbox"/>	<input type="checkbox"/>
	Undervoltage alarm	■	–	■	■	■	■	–
	Oversvoltage protection	■	■	■	■	■	■	■
	Overload protection	■	■	■	■	■	■	■
	DIN-rail mounting	■	■	■	■	■	■	■
	Screw mounting (with bracket)	–	■	■	–	–	–	<input type="checkbox"/> only 40 A
	EMI Class B	–	■	■	■	■	■	–
	UL Class 2	■ only 60 W	–	–	■	■	■	–
	N+1 redundancy	–	–	–	■	■	■	–
Parallel operation	–	–	–	■	■	■	■	
Series operation	■	■	■	■	■	■	■	
Page	341	342		343			344	

■ Standard

Available

– No/not available



### Compact power supply with diagnostics and output monitor function

S8VS contributes to higher productivity and preventative maintenance of your equipment or machine due to its unique diagnostics feature. Where production stop is critical, such as in the automotive and semiconductor industry, the S8VS with display is ideal (60 to 240 W at 24 VDC).

- Provides a replacement indication (Maintenance forecast monitor)
- Provides operation time measurement (Total run-time monitor)
- Display shows output values: voltage, current or peak current
- Non-display models available from 15 to 240 W at 5, 12 and 24 VDC
- UL Class 2 (15-60 W) and UL Class 1 div. 2 (15, 30 W); SEMI-F47-0200

### Ordering information

Power	Output voltage	Output current	Diagnostics function	Diagnostic alarm output	Size in mm (HxWxD)	Order code		
15 W	5 VDC	2 A (10 W)	Undervoltage alarm indicator	no	85x22.5x96.4	S8VS-01505		
	12 VDC	1.2 A		no		S8VS-01512		
	24 VDC	0.65 A		no		S8VS-01524		
30 W	5 VDC	4 A (20 W)	Undervoltage alarm indicator	no	85x22.5x96.4	S8VS-03005		
	12 VDC	2.5 A		no		S8VS-03012		
	24 VDC	1.3 A		no		S8VS-03024		
60 W	24 VDC	2.5 A	no	no	95x40x108.3	S8VS-06024		
90 W	24 VDC	3.75 A	no	no	115x50x121.3	S8VS-09024		
120 W	24 VDC	5 A	no	no		S8VS-12024		
180 W	24 VDC	7.5 A	no	no	115x75x125.3	S8VS-18024		
240 W	24 VDC	10 A	no	no	115x100x125.3	S8VS-24024		
60 W	24 VDC	2.5 A	Maintenance <sup>*1</sup>	no	95x40x108.3	S8VS-06024A		
			Total run-time	no		S8VS-06024B		
						<b>Alarm output sinking (NPN)</b>	<b>Alarm output sourcing (PNP)</b>	
90 W	24 VDC	3.75 A	Maintenance <sup>*1</sup>	yes	115x50x121.3	S8VS-09024A		S8VS-09024AP
			Total run-time			S8VS-09024B		S8VS-09024BP
120 W	24 VDC	5 A	Maintenance <sup>*1</sup>	yes		S8VS-12024A		S8VS-12024AP
			Total run-time			S8VS-12024B		S8VS-12024BP
180 W	24 VDC	7.5 A	Maintenance <sup>*1</sup>	yes	115x75x125.3	S8VS-18024A		S8VS-18024AP
			Total run-time			S8VS-18024B		S8VS-18024BP
240 W	24 VDC	10 A	Maintenance <sup>*1</sup>	yes	115x100x125.3	S8VS-24024A		S8VS-24024AP
			Total run-time			S8VS-24024B		S8VS-24024BP

\*1 Maintenance indicates maintenance forecast monitor

### Specifications

Specification	15 W	30 W	60 W	90 W	120 W	180 W	240 W
Efficiency	77% min. (24 V)	80% min. (24 V)	78% min.	80% min.	80% min.	80% min.	80% min.
Power factor	–	–	–	–	0.95 min.	0.95 min.	0.95 min.
Input voltage	100 to 240 VAC (85 to 264 VAC), single-phase						
Output voltage	Voltage adjustment	±10 to ±15% (with V. ADJ) min.					
	Ripple	2% p-p max. (at rated input/output voltage)					
	Input variation	0.5% max. (at 85 to 264 VAC input, 100% load)					
	Temperature influence	0.05%/°C max.					
Overload protection	105 to 160% of rated load current, voltage drop, automatic reset						
Overvoltage protection	yes	yes	yes	yes	yes	yes	yes
Input current	100 V	0.45 A m Ax.	0.9 A m Ax.	1.7 A m Ax.	2.3 A m Ax.	1.9 A m Ax.	3.8 A m Ax.
	200 V	0.25 A m Ax.	0.6 A m Ax.	1.0 A m Ax.	1.4 A m Ax.	1.1 A m Ax.	2.0 A m Ax.
	230 V	0.19 A (5 V: 0.14 A)	0.37 A (5 V: 0.27 A)	0.7 A typ.	0.9 A typ.	0.6 A typ.	0.9 A typ.
Output indicator	yes (green)	yes (green)	yes (green)	yes (green)	yes (green)	yes (green)	yes (green)
Weight	160 g	180 g	330 g	490 g	550 g	850 g	1,150 g
Operating temperature	-10 to 60°C	-10 to 60°C <sup>*1</sup>	-10 to 60°C, derating beyond 40°C, no icing or condensation				
Series operation	yes (24 V only)	yes	yes	yes	yes	yes	yes

\*1 For 30 W model 24 V: No derating, 12 & 5 V: Derating beyond 50°C.



## Slim size S8VM power supplies

All models have the same height of only 84.5 mm. These ranges cover up-to 1,500 W. The output voltages are 5, 12, 15 or 24VDC. In this series we got standard types and versions with two alarms up-to 150 W models: one for short dip in the 24 VDC supply, second one when the voltage gradually drops in time. The models from 300 W / 600 W / 1,500 W are equipped with an overload alarm function.

- Widest range in DC-output voltage (5 V, 12 V, 15 V & 24 V) & wattage (15 up-to 1,500 W)
- LED indication power ON
- Transistor output & LED indication under-voltage alarm 1 & 2 or Power failure
- All models can be Din-rail mounted (except 1,500W)
- EMI Class B, UL Class 1 division 2, SEMI-F47 (200VAC input)

## Ordering information

Power ratings	Output voltage	Output current	Size in mm (HxWxD)	Order code		
				DIN-rail mounting	Undervoltage alarm type	
					Sinking (NPN)	Sourcing (PNP)
15 W	12 V	1.3 A	84.5x35.1x94.4	S8VM-01512CD	–	–
	24 V	0.65 A		S8VM-01524CD	S8VM-01524AD <sup>*1</sup>	–
30 W	12 V	2.5 A	84.5x35.1x109.4	S8VM-03012CD	–	–
	24 V	1.3 A		S8VM-03024CD	S8VM-03024AD <sup>*1</sup>	–
50 W	12 V	4.3 A	84.5x35.1x124.5	S8VM-05012CD	–	–
	24 V	2.2 A		S8VM-05024CD	S8VM-05024AD	S8VM-05024PD
100 W	12 V	8.5 A	84.5x36.6x164.5	S8VM-10012CD	–	–
	24 V	4.5 A		S8VM-10024CD	S8VM-10024AD	S8VM-10024PD
150 W	12 V	12.5 A	84.5x45.6x164.5	S8VM-15012CD	–	–
	24 V	6.5 A		S8VM-15024CD	S8VM-15024AD	S8VM-15024PD
Power ratings	Output voltage	Output current	Size in mm (HxWxD)	Bottom mounting	DIN-rail adaptor	Power failure output
300 W	12 V	27 A	84.5x62.5x188	S8VM-30012C	S82Y-VM30D	overload,
	24 V	14 A		S8VM-30024C	–	overvoltage
600 W	12 V	53 A	84.5x101.8x192	S8VM-60012C	S82Y-VM60D	and overheat
	24 V	27 A		S8VM-60024C	–	–
1,500 W	24 V	70 A	84.5x126.5x327	S8VM-15224C	–	–

<sup>\*1</sup> No output built-in.

## Specifications

Item		15 W	30 W	50 W	100 W	150 W	300 W	600 W	1,500 W	
Efficiency	12 V models	78% min.	79% min.	79% min.	81% min.	81% min.	78% min.	79% min.	–	
	24 V models	80% min.	81% min.	80% min.	82% min.	83% min.	81% min.	81% min.	82% min.	
Input voltage		100 to 240 VAC, (85 to 264 VAC), single phase								
Output	Voltage adjustment	-20% to 20% with V. ADJ min. (S8VM-___24A_/P_ : -10% to 20%)								
	Ripple	12 V models	1.5% (p-p) max.			1.5% (p-p) max.		2.0% (p-p) max.		–
		24 V models	1.0% (p-p) max.			0.75% (p-p) max.		1.25% (p-p) max.		1.25% (p-p) max.
	Input variation	0.4% max.								
Temperature influence	0.02%/°C max.									
Overload protection		105% to 160% of rated load current, voltage drop, automatic reset								
Overvoltage protection		yes								
Output indicator		yes (green)								
Weight		180 g max.	220 g max.	290 g max.	460 g max.	530 g max.	1,100 g max.	1,700 g max.	3,800 g max.	
Series operation		yes								
Remote sensing function		no	no	no	yes					



## Industrial-use, modular power supply for multiple configurations

The S8TS is an expandable power supply; standard units can easily be snapped together in parallel to provide you with ultimate flexibility. Expandable up to 4 units, it can deliver a total power of 240W at 24VDC or a multi-output configuration.

- Improves system reliability by building up N+1 redundancy
- Standard unit; 60 W at 24 VDC, 30 W at 12 VDC and 25 W at 5 VDC
- Battery back-up unit protects against power outage (see accessories)
- Buffer unit protects against power glitches and outage (see accessories)
- EMI Class B, UL Class 2, UL Class 1 division 2

### Ordering information

Basic block		Order code			
Output voltage	Output current	Screw terminal type		Connector terminal type	
		With bus line connectors <sup>*1</sup>	Without bus line connectors <sup>*2</sup>	With bus line connectors <sup>*1</sup>	Without bus line connectors <sup>*2</sup>
24 V	2.5 A	S8TS-06024-E1 <sup>*3</sup>	S8TS-06024	S8TS-06024F-E1	S8TS-06024F
12 V	2.5 A	S8TS-03012-E1	S8TS-03012	S8TS-03012F-E1	S8TS-03012F
5 V	5 A	–	S8TS-02505	–	S8TS-02505F

<sup>\*1</sup> One S8T-BUS01 connector and one S8T-BUS02 connector are included as accessories.

<sup>\*2</sup> Bus line connectors can be ordered separately if necessary.

<sup>\*3</sup> Conforms to EMI class B with DC minus terminal ground.

### Accessories

Bus line connector		
Type	Number of connectors	Order code
AC line + DC line bus (For parallel operation)	1 connector	S8T-BUS01
	10 connectors <sup>*1</sup>	S8T-BUS11
AC line bus (For series operation or isolated operation)	1 connector	S8T-BUS02
	10 connectors <sup>*2</sup>	S8T-BUS12

<sup>\*1</sup> One package contains 10 S8T-BUS01 connectors.

<sup>\*2</sup> One package contains 10 S8T-BUS02 connectors.

### Specifications

Item	5 V models		24/12 V models	
	Single operation		Single operation	Parallel operation
Efficiency	62% min.		24 V models: 75%, 12 V models: 70% min.	
Power factor	0.8 min.		24 V models: 0.9 min., 12 V models: 0.8 min.	
Input voltage	100 to 240 VAC, (85 to 264 VAC), single-phase			
Output voltage	Voltage adjustment	5 V ±10% min.		
	Ripple	2% (p-p) max.	2% (p-p) max.	2% (p-p) max.
	Input variation	0.5% max.	–	–
	Temperature influence	0.05%/°C max. (with rated input, 10 to 100% load)		
Overcurrent protection	105 to 125% of rated load current, inverted L drop, automatic reset			
Overvoltage protection	yes	yes	yes	yes
Output indicator	yes (green)	yes (green)	yes (green)	yes (green)
Weight	450 g max.	450 g max.	450 g max.	450 g max.
Series operation	yes	yes	yes	yes
Parallel operation	no	yes	yes	yes
Size in mm (HxWxD)	120x43x120			



## Compact, 3-phase input power supply

S8VT provides all you need for control panel design. From 5 to 40 A available.

- 3-phase input (340-576 VAC)
- 5, 10, 20 and 40 A; 24 VDC output
- Fuses input protection
- UL60950-1, UL508 listing and CE
- Conforms to EN61000-3-2

### Ordering information

Power ratings	Output voltage	Output current	Size in mm (HxWxD)	Order code
120 W	24 V	5 A	125x45x130	S8VT-F120224E
240 W	24 V	10 A	170x45x130	S8VT-F240024E
480 W	24 V	20 A	170x100x130	S8VT-F480224E
960 W	24 V	40 A	170x195x130	S8VT-F960224E

### Specifications

Item	5 A	10 A	20 A	40 A
<b>Efficiency</b>	88%	90%	91%	91%
<b>Voltage range</b>	340 to 576 VAC 3 AC resp, 480 to 810 VDC (1 phase)			
<b>Output voltage</b>	<b>Voltage adjustment</b>	22.5 to 26.4 VDC min.		
	<b>Ripple</b>	100 mV max.		
	<b>Input variation</b>	±0.5% max.		
	<b>Temperature influence</b>	Less than 0.05%/°C		
<b>Overload protection</b>	yes			
<b>Overvoltage protection</b>	yes			
<b>Output indicator</b>	yes (green)	yes (green)	yes (green)	yes (green)
<b>Weight</b>	750 g	1.0 kg	1.8 kg	3.3 kg
<b>Series operation</b>	yes (for 2 units)			
<b>Parallel operation</b>	yes (for 2 units)			



### S8T-DCBU-01

The S8T-DCBU-01 battery backup block supplies 24 VDC for a fixed period of time during AC input outages to considerably improve system reliability.

- Supplies 24 VDC for a long period of time during AC input outages
- For system reliability improvement
- Block power supply basic block is connected by the bus line connector
- Simple system configuration
- Alarms indicated on main unit and via alarm signal output

#### Ordering information

Product	Input voltage	Output voltage	Output current			Order code	
DC back-up block	24 to 28 VDC	24 V	3.7 A/8 A			S8T-DCBU-01	
Battery holder	–	–	–			S82Y-TS01	
Product	Input voltage	Output voltage	Output current	Type	Order code		
Basic block (use together with the DC back-up block)	100 to 240 VAC	24 V	2.5 A	Screw terminal type	With bus line connectors	S8TS-06024-E1	
					Without bus line connectors	S8TS-06024	
				Connector terminal type	With bus line connectors	S8TS-06024F-E1	
					Without bus line connectors	S8TS-06024F	
Product	Back-up time	Overcurrent protection operating point selector				Order code	
Battery	8 min./3.7 A	5.7 A (typ.)	–				LC-R122R2PG
	4 min./8.0 A	5.7 A (typ.)	11.7 A (typ.)				LC-R123R4PG

Note: The S8TS DC back-up block is for S8TS power supplies only.

#### Specifications

Item	Size in mm (HxWxD)
S8TS-DCBU-01	120x43x130
Battery holder	82x185.7x222.25



### S8T-DCBU-02

Prevents equipment stoppage, data loss and other problems resulting from momentary power failures. One S8TS-DCBU-02 buffer block provides a back-up time of 500 ms at an output current of 2.5 A. Can be wired to the 24 VDC output from any switch mode power supply.

- Connects to all Omron power supplies: S8TS, S8VS, S82J, S82K, S8VM, S8PE
- Connects to both single-phase and three-phase power supplies
- Connects to an S8TS power supply via an S8T-BUS03 bus line connector
- Parallel connection up to 4 units to increase back-up time and capacity
- Complies with Semi F47-0200 standard

#### Ordering information

Input voltage	Output voltage (during back-up operation)	Output current	Order code
24 VDC (24 to 28 VDC)	22.5 V	2.5 A	S8T-DCBU-02

#### Accessories

Type	Number of connectors	Order code
DC bus line connector (for use with S8TS only)	1 connector	S8T-BUS03
	10 connectors	S8T-BUS13

#### Specifications


Item	Size in mm (HxWxD)
S8TS-DCBU-02	120x43x120

## WHEN TIMING ACCURACY MATTERS!

### H5CX – The most complete digital timer

The H5CX series offers multiple-functions and -timing ranges for precise timing control, as well as real twin-timing and memory function. These and other added-value features ensure that the H5CX covers almost every possible user requirement in timers.

- 10 different time functions
- Two-colour display value, red or green
- Front-mounting/plug-in
- 0.001 s to 9999 h, 10 ranges

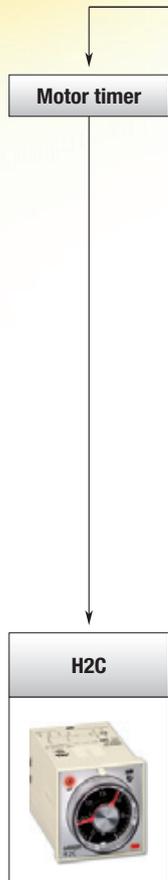



Which type of timer is needed?

Analog

Digital

Which mounting method is required?

DIN-rail

Plug/front

Which size is required?

Which size is required?

17.5 mm

22.5 mm

48x24 mm

48x48 mm

H3DS

H3DE

H3YN

H3CR

H8GN  
timer/counter

H5CX



Page 350

Page 351

Page 352

Page 346

Page 363

Page 354

# Selection table

Category		Analog solid state timer											
Selection criteria													
	Model	H3DS-M	H3DS-S	H3DS-A	H3DS-F	H3DS-G	H3DS-X	H3DE-M	H3DE-S	H3DE-F	H3DE-G	H3DE-H	
	Mounting	DIN-rail											
	Size	17.5 mm						22.5 mm					
Contact configuration	Type	Multi-functional			Twin timer	Star-delta	Two-wired	Multi-functional			Twin timer	Star-delta	Power OFF-delay
	Time limit	■	■	■	■	■	■	■	■	■	■	■	
	Instantaneous	-	-	-	-	-	-	■	■	-	-	-	
	Programmable contacts	-	-	-	-	-	-	■	■	-	-	-	
	14 pins	-	-	-	-	-	-	-	-	-	-	-	
	11 pins	-	-	-	-	-	-	-	-	-	-	-	
	8 pins	-	-	-	-	-	-	-	-	-	-	-	
	Screw terminals	■	■	■	■	■	■	■	■	■	■	■	
Screw-less clamp terminals	□	□	□	□	□	□	-	-	-	-	-		
Screw-less clamp sockets	-	-	-	-	-	-	-	-	-	-	-		
Inputs	Voltage input	□	□	□	-	-	-	□	□	-	-	-	
	Transistor	-	-	-	-	-	-	-	-	-	-	-	
Outputs	Relay	■	■	■	■	■	-	■	■	■	■	■	
	SCR	-	-	-	-	-	■	-	-	-	-	-	
	Relay output type	SPDT	■	■	■	■	-	-	□	■	■	■ (2x)	■
		SPST-NO	-	-	-	-	■ (2x)	-	-	-	-	-	-
		DPDT	-	-	-	-	-	-	□	■	-	-	-
4PDT		-	-	-	-	-	-	-	-	-	-	-	
Features	Time range	Total time range	0.1 s to 120 h	1 s to 120 h	2 s to 120 h	0.1 s to 12 h	1 s to 120 s	0.1 s to 120 h	0.1 s to 120 h	0.1 s to 12 h	1 s to 120 s	0.1 s to 120 s	
		Number of sub ranges	7	7	7	6	2	7	8	8	8	2	2 (model dependent)
	Supply voltage	24 to 230 VAC or 24 to 48 VDC	24 to 230 VAC or 24 to 48 VDC	24 to 230 VAC or 24 to 48 VDC	24 to 230 VAC or 24 to 48 VDC	24 to 230 VAC or 24 to 48 VDC	24 to 230 VAC or 24 to 48 VDC	24 to 230 VAC or 24 to 48 VDC	24 to 230 VAC or 12 VDC	24 to 230 VAC/DC	24 to 230 VAC/DC	24 to 230 VAC/DC	100 to 120 VAC, 200 to 230 VAC, 24 VAC/DC, 48 VAC/DC
	Number of operating modes	8	4	1	2	1	1	8	4	1	1	1	
Functions	ON-delay	■	■	-	-	-	■	■	■	-	-	-	
	Flicker OFF start	■	-	-	■	-	-	■	-	■	-	-	
	Flicker ON start	■	■	-	■	-	-	■	■	■	-	-	
	Signal ON-/OFF-delay	■	-	-	-	-	-	■	-	-	-	-	
	Signal OFF-delay	■	-	-	-	-	-	■	-	-	-	■	
	Interval (signal or power start)	■	■	-	-	-	-	■	■	-	-	-	
	One-shot output (ON-delay)	■	■	-	-	-	-	■	■	-	-	-	
	ON-delay (fixed)	-	-	■	-	-	-	-	-	-	-	■	-
	Independent ON/OFF time setting	-	-	-	-	-	-	-	-	-	-	-	
Re-remarks	Star-delta	-	-	-	-	■	-	-	-	-	-	-	
	Transistor	-	-	-	-	-	■	-	-	-	-	-	
Page	350						351						

Category		Analog solid state timer					Digital timer		Motor timer	
Selection criteria										
	Model	H3YN	H3CR-A	H3CR-F	H3CR-G	H3CR-H	H5CX	H8GN	H2C	
	Mounting	Socket/on panel								
	Size	21.5 mm	1/16 DIN						1/32 DIN	1/16 DIN
Type	Miniature	Multi-functional	Twin timer	Star-delta	Power OFF-delay	Multi-functional	Preset counter/timer	Motor timer		
Contact configuration	Time limit	■	■	■	■	■	■	■	■	
	Instantaneous	-	■	-	■	■	-	-	■	
	Programmable contacts	-	-	-	-	-	■	■	-	
	14 pins	■	-	-	-	-	-	-	-	
	11 pins	-	□	□	□	□	□	-	□	
	8 pins	■	□	□	□	□	□	-	□	
	Screw terminals	-	-	-	-	-	□	■	□	
	Screw-less clamp terminals	-	-	-	-	-	-	-	-	
Screw-less clamp sockets	□	-	-	-	-	-	-	-		
Inputs	Voltage input	-	□	-	-	-	-	-	-	
	Transistor	-	□	-	-	-	□	-	-	
Outputs	Relay	■	□	■	■	■	□	■	■	
	SCR	-	-	-	-	-	-	-	-	
	Relay output type	SPDT	-	□	-	-	□	□	■	■
		SPST-NO	-	-	-	■ (2x)	-	-	-	-
		DPDT	□	□	■	-	□	-	-	-
		4PDT	□	-	-	-	-	-	-	-
Features	Time range	Total time range	0.1 s to 10 h (model dependent)	0.05 s to 300 h, 0.1 s to 600 h (model dependent)	0.05 s to 30 h or 1.2 s to 300 h (model dependent)	0.5 s to 120 s	0.05 s to 12 s, 1.2 s to 12 min	0.001 s to 9999 h (configurable)	0.000 s to 9999 h (configurable)	0.2 s to 30 h
		Number of sub ranges	2	9	14	4	4	10	9	15
	Supply voltage	24, 100 to 120, 200 to 230 VAC, 12, 23, 48, 100 to 110, 125 VDC	100 to 240 VAC, 100 to 125 VDC, 24 to 48 VAC, 12 to 48 VDC	100 to 240 VAC, 12 VDC, 24 VAC/DC, 48 to 125 VDC	100 to 120 VAC, 200 to 240 VAC	100 to 120 VAC, 200 to 240 VAC, 24 VAC/DC, 48 VDC, 100 to 125 VDC	100 to 240 VAC, 24 VAC, 12 to 24 VDC	24 VDC	24, 48, 100, 110, 115, 120, 200, 220, 240 VAC	
	Number of operating modes	4	6 (model dependent)	-	1	1	12	6	2	
Functions	ON-delay	■	□	-	-	-	■	■	■	
	Flicker OFF start	■	□	■	-	-	■	■	-	
	Flicker ON start	■	□	■	-	-	■	-	-	
	Signal ON-/OFF-delay	-	□	-	-	-	■	-	-	
	Signal OFF-delay	-	□	-	-	■	■	■	■	
	Interval (signal or power start)	■	□	-	-	-	■	■	-	
	One-shot output (ON-delay)	-	□	-	-	-	■	-	-	
	ON-delay (fixed)	-	-	-	-	-	■	-	-	
	Independent ON/OFF time setting	-	-	-	-	-	■	■	-	
	Star-delta	-	-	-	■	-	-	-	-	
Re-remarks	Transistor	-	□	-	-	-	■	-	-	
Page	352	353				354	363	355		

■ Standard □ Available - No/not available



## DIN-rail mounted, standard 17.5mm-width solid state timer range

This broad range of timers includes many functionalities and has a wide AC/DC power supply range. Models with screwless clamp connection available.

- 17.5 mm width, modular 45 mm
- DIN-rail mounting
- 24-48 VDC and 24-230 VAC
- 0.1 s to 120 h, 7 ranges

### Ordering information

Type	Supply voltage	Control output	Time setting range	Operating modes	Order code			
					Screw terminal type	Screw-less clamp type		
Multi-functional timer	24 to 230 VAC (50/60 Hz)/ 24 to 48 VDC	SPDT	0.1 s to 120 h	ON-delay, flicker OFF start, flicker ON start, signal ON/OFF-delay, signal OFF-delay, interval, one-shot	H3DS-ML	H3DS-MLC		
Standard timer				ON-delay, flicker ON start, interval, one-shot	H3DS-SL	H3DS-SLC		
Single function timer				ON-delay	H3DS-AL	H3DS-ALC		
Twin timer				Relay SPDT	0.1 s to 12 h	Flicker OFF start, flicker ON start	H3DS-FL	H3DS-FLC
Star-delta timer				2x Relay SPST-NO	1 s to 120 s	Star-delta	H3DS-GL	H3DS-GLC
Two-wired timer	24 to 230 VAC/VDC (50/60 Hz)	SCR output	0.1 s to 120 h	ON-delay	H3DS-XL	H3DS-XLC		

### Specifications

<b>Terminal block</b>	Screw terminal type: Clamps two 2.5 mm <sup>2</sup> max. bar terminals without sleeves Screw-less clamp type: Clamps two 1.5 mm <sup>2</sup> max. bar terminals without sleeves
<b>Mounting method</b>	DIN-rail mounting
<b>Operating voltage range</b>	85 to 110% of rated supply voltage
<b>Power reset</b>	Minimum power-off time: 0.1 s, 0.5 s for H3DS-G
<b>Reset voltage</b>	2.4 VAC/VDC max., 1.0 VAC/VDC max. for H3DS-X
<b>Voltage input</b>	Max. permissible capacitance between input lines (terminals B1 and A2): 2,000 pF Load connectable in parallel with inputs (terminals B1 and A1) H-level: 20.4 to 253 VAC/20.4 to 52.8 VDC L-level: 0 to 2.4 VAC/VDC
<b>Control output</b>	Contact output: 5 A at 250 VAC with resistive load (cos $\phi$ = 1) 5 A at 30 VDC with resistive load (cos $\phi$ = 1)
<b>Ambient temperature</b>	Operating: -10 to 55°C (with no icing) Storage: -25 to 65°C (with no icing)
<b>Accuracy of operating time</b>	±1% max. of FS (±1% ±10 ms max. at 1.2 s range)
<b>Setting error</b>	±10% ±50 ms max. of FS
<b>Influence of voltage</b>	±0.7% max. of FS (±0.7% ±10 ms max. at 1.2 s range)
<b>Influence of temperature</b>	±5% max. of FS (±5% ±10 ms max. at 1.2 s range)
<b>Life expectancy (not H3DS-X)</b>	Mechanical: 10 million operations min. (under no load at 1,800 operations/h) Electrical: 100,000 operations min. (5 A at 250 VAC, resistive load at 360 operations/h)
<b>Size in mm(HxWxD)</b>	80x17.5x73



## DIN-rail mounted, standard 22.5mm-width solid state timer range

The H3DE series of timers provides a wide AC/DC power supply and time range to reduce the number of items.

- Size in mm (HxWxD): 79x22.5x100
- DIN-rail mounting
- 24-230VAC/VDC (except -H)
- Wide time setting range: 0.10 s - 120 h (except -H and -G), 8 ranges

### Ordering information

Type	Supply voltage	Control output	Time setting range	Operating modes	Order code	
Multi-functional standard timers	12 VDC 24 to 230 VAC/VDC	DPDT	0.1 s to 120 h	ON-delay, flicker OFF start, flicker ON start, signal ON/OFF-delay, signal OFF-delay, interval, one-shot	H3DE-M2 DC12 <sup>*1</sup>	
		SPDT			H3DE-M1 AC/DC24-230	
		DPDT		ON-delay, flicker ON start, interval, one-shot	H3DE-M2 AC/DC24-230 <sup>*1</sup>	
		SPDT			H3DE-S1 AC/DC24-230	
Twin timer		DPDT			H3DE-S2 AC/DC24-230 <sup>*1</sup>	
Star-delta timer		SPDT	0.1 s to 12 h	Flicker OFF start, flicker ON start	H3DE-F AC/DC24-230	
Power OFF-delay timer	24 VAC/VDC	2x SPDT	1 to 120 s	Star-delta	H3DE-G AC/DC24-230	
			0.1 to 12 s			
	48 VAC/VDC	SPDT	1 to 120 s	Signal OFF-delay	H3DE-H AC/DC24 L	
			0.1 to 12 s			H3DE-H AC/DC24 S
			1 to 120 s			H3DE-H AC/DC48 L
	100 to 120 VAC	SPDT	0.1 to 12 s		H3DE-H AC/DC48 S	
			1 to 120 s		H3DE-H AC100-120 L	
	200 to 230 VAC	SPDT	0.1 to 12 s		H3DE-H AC100-120 S	
1 to 120 s				H3DE-H AC200-230 L		
		SPDT	0.1 to 12 s		H3DE-H AC200-230 S	

\*1 One output can be set to instantaneous.

### Specifications

<b>Terminal block</b>	Clamps two 2.5 mm <sup>2</sup> max. bar terminals without sleeves
<b>Mounting method</b>	DIN-rail mounting
<b>Operating voltage range</b>	85 to 110% of rated supply voltage
<b>Power reset</b>	Minimum power-off time: H3DE-M/S, H3DE-F: 0.1 s, H3DE-G: 0.5 s
<b>Reset voltage</b>	2.4 VAC/VDC max. (not for H3DE-H)
<b>Voltage input (H3DE-M/-S)</b>	Max. permissible capacitance between input lines (terminals B1 and A2): 2,000 pF Load connectable in parallel with inputs (terminals B1 and A2) H-level: 20.4 to 253 VAC/VDC, L-level: 0 to 2.4 VAC/VDC
<b>Control output</b>	Contact output: 5 A at 250 VAC with resistive load (cosφ = 1), 5 A at 30 VDC with resistive load (cosφ = 1)
<b>Ambient temperature</b>	Operating: -10 to 55°C (with no icing), storage: -25 to 65°C (with no icing)
<b>Accuracy of operating time</b>	±1% max. of FS (±1% ±10 ms max. at 1.2 s range)
<b>Setting error</b>	±10% ±0.05 s max. of FS
<b>Signal input time</b>	50 ms min.
<b>Influence of voltage</b>	±0.5% max. of FS
<b>Influence of temperature</b>	±2% max. of FS
<b>Contact material</b>	AGNi+gold plating
<b>Life expectancy</b>	Mechanical: 10 million operations min. (under no load at 1,800 operations/h) Electrical: 100,000 operations min. (5 A at 250 VAC, resistive load at 360 operations/h)
<b>Degree of protection</b>	IP30 (terminal block: IP20)
<b>Size in mm (HxWxD)</b>	79x22.5x100



## Miniature timer with multiple time ranges and multiple operating modes

H3YN features 4 multi-operating modes: ON-delay, interval, flicker ON start and flicker OFF start.

- Size in mm (HxWxD): 28x21.5x52.6
- Plug-in
- All supply voltages available
- 0.1 s to 10 h
- DPDT (5A) or 4PDT (3A)

### Ordering information

Supply voltage	Functions	Time-limit contact	Order code	
			Short-time range model (0.1 s to 10 min)	Long-time range model (0.1 min to 10 h)
12 VDC	ON-delay Interval Flicker ON Flicker OFF	DPDT	H3YN-2 12DC	H3YN-21 12DC
24 VAC			H3YN-2 24AC	H3YN-21 24AC
24 VDC			H3YN-2 24DC	H3YN-21 24DC
100 to 120 VAC			H3YN-2 100-120AC	H3YN-21 100-120AC
200 to 230 VAC			H3YN-2 200-230AC	H3YN-21 200-230AC
12 VDC			4PDT	H3YN-4 12DC
24 VAC		H3YN-4 24AC		H3YN-41 24AC
24 VDC		H3YN-4 24DC		H3YN-41 24DC
100 to 120 VAC		H3YN-4 100-120AC		H3YN-41 100-120AC
200 to 230 VAC		H3YN-4 200-230AC	H3YN-41 200-230AC	

### Accessories

#### Connecting socket

Timer	DIN-rail mounting/ front-connecting socket	Back-connecting socket PCB terminal
H3YN-2/-21	PYF08A, PYF08A-N, PYF08A-E	PY08-02
H3YN-4/-41	PYF14A, PYF14A-N, PYF14A-E	PY14-02

#### Hold-down clips

Applicable socket	Order code
PYF08A, PYF08A-N, PYF08A-E, PYF14A, PYF14A-N, PYF14A-E	Y92H-3 (pair)
PY08, PY08-02, PY14-02	Y92H-4

### Specifications

Item	H3YN-2/-4	H3YN-21/-41
<b>Time ranges</b>	0.1 s to 10 min (1 s, 10 s, 1 min, or 10 min max. selectable)	0.1 min to 10 h (1 min, 10 min, 1 h, or 10 h max. selectable)
<b>Rated supply voltage</b>	24, 100 to 120, 200 to 230 VAC (50/60 Hz) 12, 24, 48, 100 to 110, 125 VDC	
<b>Pin type</b>	Plug-in	
<b>Operating mode</b>	ON-delay, interval, flicker OFF start, or flicker ON start (selectable with DIP switch)	
<b>Operating voltage range</b>	85 to 110% of rated supply voltage (12 VDC: 90 to 110% of rated supply voltage)	
<b>Reset voltage</b>	10% min. of rated supply voltage	
<b>Control outputs</b>	DPDT: 5 A at 250 VAC, resistive load ( $\cos\phi = 1$ ), 4PDT: 3 A at 250 VAC, resistive load ( $\cos\phi = 1$ )	
<b>Accuracy of operating time</b>	$\pm 1\%$ FS max. (1 s range: $\pm 1\% \pm 10$ ms max.)	
<b>Setting error</b>	$\pm 10\% \pm 50$ ms FS max.	
<b>Reset time</b>	Min. power-opening time: 0.1 s max. (including halfway reset)	
<b>Influence of voltage</b>	$\pm 2\%$ FS max.	
<b>Influence of temperature</b>	$\pm 2\%$ FS max.	
<b>Ambient temperature</b>	Operating: -10 to 50°C (with no icing), storage: -25 to 65°C (with no icing)	
<b>Degree of protection</b>	IP40	
<b>Size in mm (HxWxD)</b>	28x21.5x52.6	



## DIN 48x48 mm multi-functional timer series

This elaborate range of solid state timers provides you with a multi-functional timer, twin timer, star-delta timer and a power OFF-delay timer.

- 48x48 mm front-panel/plug-in
- High-/low-voltage models (except -H and -G)
- 0.05 s to 300 h (except -H and -G)
- DPDT, 5A at 250VAC
- Transistor 100mA at 30VDC

### Ordering information

Output	Number of pins	Supply voltage	Time range	Operating mode	Order code
Relay DPDT	11	100 to 240 VAC/100 to 125 VDC	0.05 s to 300 h	ON-delay, flicker OFF start, flicker ON start, signal ON/OFF-delay, signal OFF-delay, interval	H3CR-A 100-240AC/100-125DC
Transistor		24 to 48 VAC/12 to 48 VDC			H3CR-A 24-48AC/12-48DC
Relay DPDT	8	100 to 240 VAC/100 to 125 VDC	0.05 s to 300 h	ON-delay, flicker ON start, interval, one-shot	H3CR-AS 24-48AC/12-48DC
Transistor		24 to 48 VAC/12 to 48 VDC			H3CR-A8 100-240AC/100-125DC
Relay SPDT		100 to 240 VAC/100 to 125 VDC	0.05 s to 300 h		H3CR-A8 24-48AC/12-48DC
		24 to 48 VAC/VDC			H3CR-A8S 24-48AC/12-48DC
		100 to 240 VAC/100 to 125 VDC			H3CR-A8E 100-240AC/100-125DC
		24 to 48 VAC/VDC			H3CR-A8E 24-48AC/DC
Relay DPDT	11	100 to 240 VAC	0.05 s to 30 h	Flicker OFF start	H3CR-F 100-240AC
		24 VAC/VDC			H3CR-F 24AC/DC
	8	100 to 240 VAC	0.05 s to 30 h	Flicker ON start	H3CR-F8 100-240AC
		24 VAC/VDC			H3CR-F8 24AC/DC
	11	100 to 240 VAC	0.05 s to 30 h	Star-delta	H3CR-FN 100-240AC
		24 VAC/VDC			H3CR-FN 24AC/DC
	8	100 to 240 VAC	0.05 to 12 s	Signal OFF-delay	H3CR-F8N 100-240AC
		24 VAC/VDC			H3CR-F8N 24AC/DC
Time-limit contact and instantaneous contact		100 to 120 VAC	0.05 to 12 m		H3CR-G8EL 100-120AC
		200 to 240 VAC			H3CR-G8EL 200-240AC
DPDT	8	100 to 120 VAC	0.05 to 12 s	Signal OFF-delay	H3CR-H8LS 100-120AC
		200 to 240 VAC			H3CR-H8LS 200-240AC
		24 VAC/VDC			H3CR-H8LS 24AC/DC
	8	100 to 120 VAC	0.05 to 12 m		H3CR-H8LM 100-120AC
		200 to 240 VAC		H3CR-H8LM 200-240AC	
		24 VAC/VDC		H3CR-H8LM 24AC/DC	

### Accessories

Name/specifications	Order code	
Flush-mounting adapter	Y92F-30	
Protective cover	Y92A-48B	
Front connecting socket	8-pin, finger-safe type, DIN-rail	P2CF-08-E
Front connecting socket	11-pin, finger-safe type, DIN-rail	P2CF-11-E
Back connecting socket	8-pin	P3G-08
	11-pin	P3GA-11

Name/specifications	Order code	
Time setting ring	Setting a specific time	Y92S-27
	Limiting the setting range	Y92S-28
Panel cover	Light grey (5Y7/1)	Y92P-48GL
	Black (N1.5)	Y92P-48GB

### Specifications

<b>Accuracy of operating time</b>	±0.2% FS max. (±0.2% ±10 ms max. in a range of 1.2 s)
<b>Influence of voltage</b>	±0.2% FS max. (±0.2% ±10 ms max. in a range of 1.2 s)
<b>Influence of temperature</b>	±1% FS max. (±1% ±10 ms max. in a range of 1.2 s)
<b>Ambient temperature</b>	Operating: -10 to 55°C (with no icing), storage: -25 to 65°C (with no icing)
<b>Life expectancy</b>	<b>Mechanical:</b> 20,000,000 operations min. (under no load at 1,800 operations/h)
	<b>Electrical:</b> 100,000 operations min. (5 A at 250 VAC, resistive load at 1,800 operations/h)
<b>Size in mm (HxWxD)</b>	48x48x66.6 (H3CR-A, -F), 48x48x78 (H3CR-G, -H)
<b>Setting error</b>	±5% FS ±50 ms
<b>Degree of protection</b>	IP40 (panel surface)
<b>Weight</b>	Approx. 90 g



## The most complete digital standard timer on the market

H5CX offers you the most complete series of products on the market today. Based on extensive customer research, these new timers have been designed with added-value features that users both need and appreciate.

- Size in mm (HxWxD): 48x48x64 to 100 mm
- Two-colour display value, red or green
- Front-mounting / plug-in
- 0.001 s to 9999 h, 10 ranges
- Input NPN, PNP and contact

### Ordering information

Output type	Supply voltage	Functions	External connection	Size in mm (HxWxD)	Socket depth (mm)	Order code	
Contact output	100 to 240 VAC	A: Signal ON-delay	Screw terminals	48x48x100	0	H5CX-A	
	12 to 24 VDC/24 VAC	A-1: Signal ON-delay 2		48x48x64		H5CX-AD	
Transistor output	100 to 240 VAC	A-2: Power ON-delay 1		48x48x100		14.4	H5CX-AS
	12 to 24 VDC/24 VAC	A-3: Power ON-delay 2		48x48x64	H5CX-ASD		
Contact output	100 to 240 VAC	b: Repeat cycle 1		11-pin socket	48x48x72.5		H5CX-A11
	12 to 24 VDC/24 VAC	b-1: Repeat cycle 2			48x48x63.7		H5CX-A11D
Transistor output	100 to 240 VAC	d: Signal OFF-delay	11-pin socket	48x48x72.5	H5CX-A11S		
	12 to 24 VDC/24 VAC	E: Interval		48x48x63.7	H5CX-A11SD		
Contact output	100 to 240 VAC	F: Cumulative	8-pin socket	48x48x63.7	14.3	H5CX-L8	
	12 to 24 VDC/24 VAC	Z: ON/OFF-duty adjustable flicker				H5CX-L8D	
Transistor output	100 to 240 VAC	toff: Twin timer OFF start	8-pin socket	48x48x63.7	14.3	H5CX-L8S	
	12 to 24 VDC/24 VAC	ton: Twin timer ON start				H5CX-L8SD	

### Accessories

Name	Order code	
Flush-mounting adapter	Y92F-30	
Waterproof packing	Y92S-29	
Front-connecting socket	8-pin, finger safe type	P2CF-08-E
11-pin, finger safe type		P2CF-11-E
Back-connecting socket	8-pin	P3G-08
	11-pin	P3GA-11
Hard cover		Y92A-48
Soft cover		Y92A-48F1

### Specifications

Item	H5CX-A_	H5CX-A11_	H5CX-L8_
Display	7-segment, negative transmissive LCD		
	Present value: 11.5 mm-high characters		
	red or green (programmable)	red	
	Set value: 6-mm-high characters, green		
Digits	4 digits		
Total time range	0.001 s to 9,999 h (configurable)		
Timer mode	Elapsed time (Up), remaining time (Down) (selectable)		
Input signals	Signal, reset, gate		Signal, reset
Key protection	Yes		
Memory backup	EEPROM (overwrites: 100,000 times min.) that can store data for 10 years min.		
Ambient temperature	Operating: -10 to 55°C (no icing or condensation), side-by-side mounting: -10 to 50°C		
Case color	Black (N1.5)		



### DIN-sized (48x48) motor timer with variable time ranges

This motor timer series provides you with many features, such as ON-delay, time indicator, moving pointer and synchronous motor. Moreover, the LED indicator shows the time operation, time range and the rated voltage.

- DIN-sized 48x48mm
- Front-panel/plug-in/DIN-rail
- All supply voltages available
- 0.2 s to 30 h
- SPDT, 6A at 250VAC

#### Ordering information

Operation/resetting system	Internal connection	Terminal	Time-limit contact	Instantaneous contact	Time range code	Order code
Time-limit operation/ electric resetting	Separate motor and clutch connection	11-pin socket	SPDT	SPDT	1.25 s to 30 h in 5 ranges	H2C-RSA 110AC H2C-RSA 220AC H2C-RSA 24AC
					0.2 s to 6 h in 5 ranges	H2C-RSB 110AC H2C-RSB 220AC H2C-RSB 24AC
					0.5 s to 12 h in 5 ranges	H2C-RSC 110AC H2C-RSC 220AC H2C-RSC 24AC
Time-limit operation/ self-resetting	Separate motor and clutch connection	11-pin socket	SPDT	SPDT	1.25 s to 30 h in 5 ranges	H2C-SA 110AC H2C-SA 220AC H2C-SA 24AC
					0.2 s to 6 h in 5 ranges	H2C-SB 110AC H2C-SB 220AC H2C-SB 24AC
					0.5 s to 12 h in 5 ranges	H2C-SC 110AC H2C-SC 220AC H2C-SC 24AC

Note: Other voltages available on request

#### Accessories

Name/specifications	Order code	Name/specifications	Order code
DIN-rail mounting/ front-connecting socket	8-pin, finger safe type	Hold-down clip (pair)	For PL08 and PL11 sockets
	11-pin, finger safe type		For PF085A socket
Back-connecting socket	8-pin, screw terminal	Flush mounting adapter	Y92F-30
	11-pin	Time setting ring	Y92A-Y1

#### Specifications


<b>Operating voltage range</b>	85 to 110% of rated supply voltage
<b>Reset voltage</b>	10% max. of rated supply voltage
<b>Reset time</b>	Min. power-opening time: 0.5 s, min. pulse width: 0.5 s
<b>Control outputs</b>	6 A at 250 VAC, resistive load (cosφ = 1)
<b>Mounting method</b>	Flush mounting (except for H2C-F/-FR models), surface-mounting, DIN-rail mounting
<b>Life expectancy</b>	Mechanical: 10,000,000 operations min. Electrical: 500,000 operations min.
<b>Motor life expectancy</b>	20,000 h
<b>Accuracy of operating time</b>	±0.5% FS max. (±1% max. at 0.2 to 6 s for the time range code B or at 0.5 to 12 s for the time range code C)
<b>Setting error</b>	±2% FS max.
<b>Reset time</b>	0.5 s max.
<b>Influence of voltage</b>	±1% FS max.
<b>Influence of temperature</b>	±2% FS max.
<b>Ambient temperature</b>	Operating: -10 to 50°C
<b>Case color</b>	Light grey (Munsell 5Y7/1)
<b>Degree of protection</b>	IP40 (panel surface)
<b>Size in mm (HxWxD)</b>	48x48x77.5

## MULTI-FUNCTIONAL PRESET COUNTER

### H7CX – Designed with added-value features


The H7CX series offers the ultimate in versatility and intuitive programming.

- 6 basic functions in one
- Switching color on threshold, green & red
- Front-mounting/plug-in
- 12 different outputs modes
- Display 6 digits from -100 K +1 up to 1 M -1

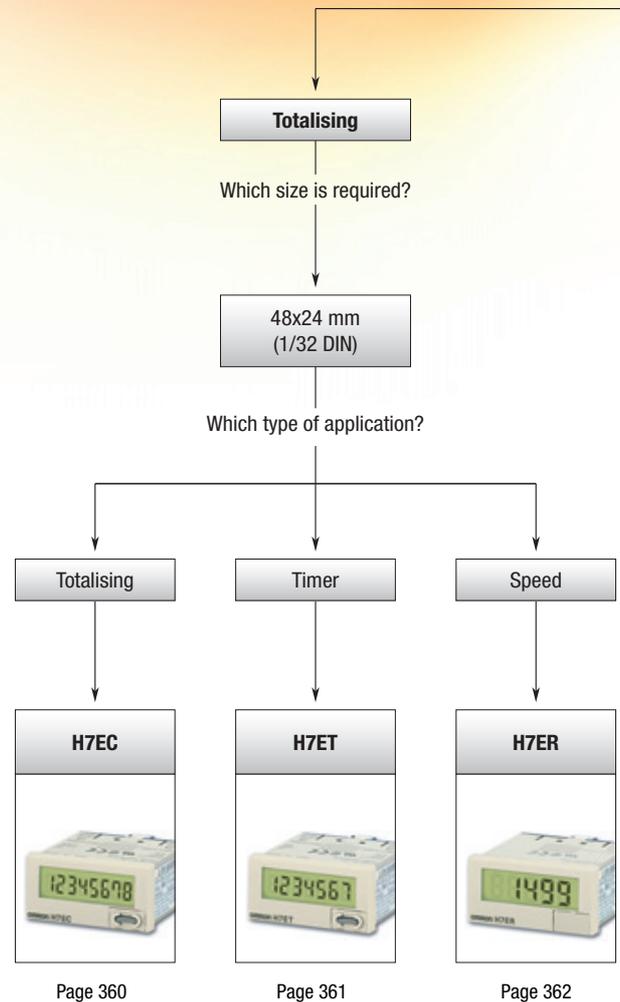



What is the type of counting application?

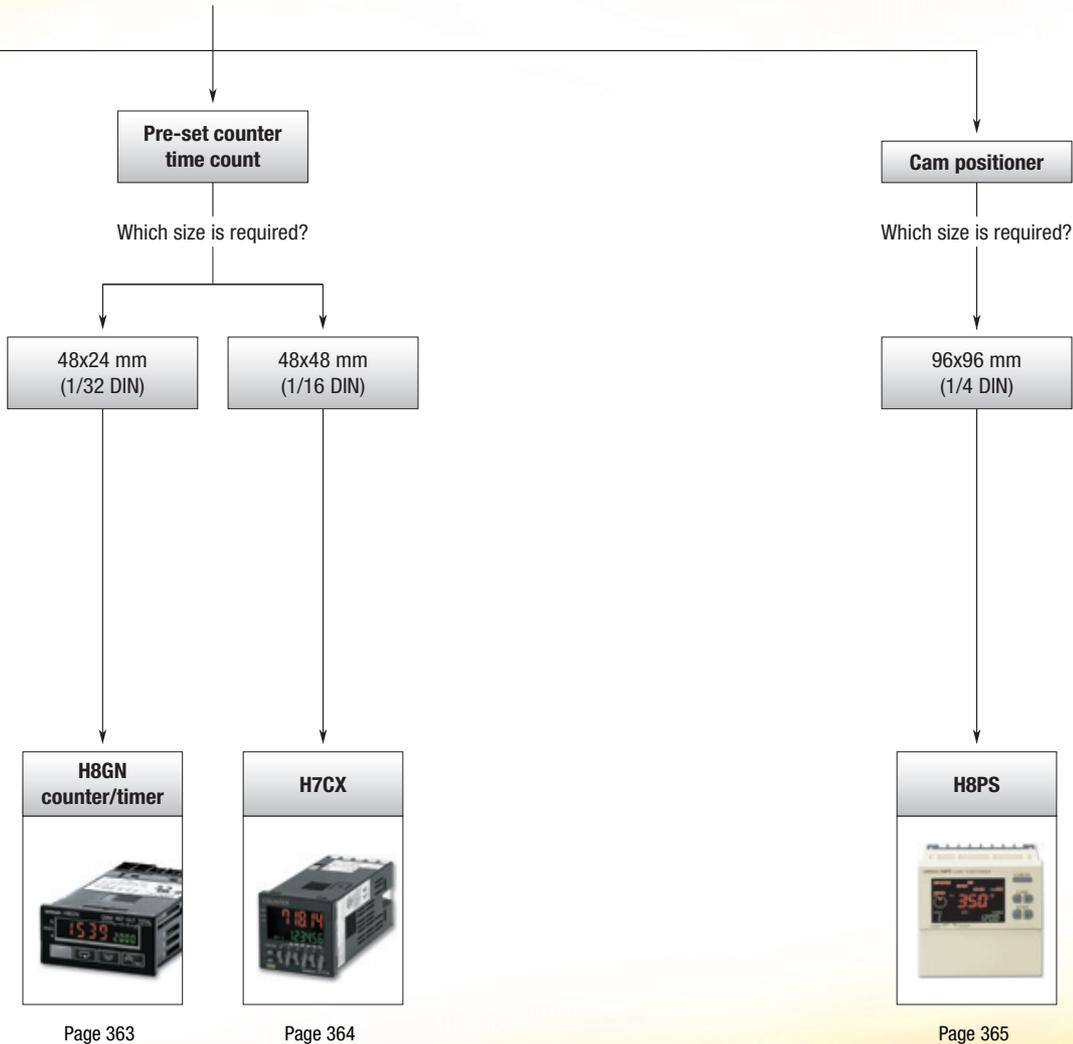

# Selection table

Category		Self-powered total	Self-powered timer	Self-powered tachometer
Selection criteria				
	Model	H7EC	H7ET	H7ER
	Display	LCD		
	Size	1/32 DIN		
Outputs	Control outputs	-	-	-
	5 stage	-	-	-
	Total	■	■	-
	Time	-	■	-
	Preset	-	-	-
	Batch	-	-	-
	Dual	-	-	-
Tachometer	■	-	■	
Inputs	Control inputs	No-voltage, PNP/NPN, DC-voltage, AC/DC multi-voltage	No-voltage, PNP/NPN, DC-voltage, AC/DC multi-voltage	No-voltage, PNP/NPN
Features	Dual operation	-	-	-
	Number of digits	8	7	4 or 5
	NPN/PNP switch	■	■	■
	Back-lit	□	□	□
	External reset	■	■	-
	Manual reset	■	■	-
	Number of banks	-	-	-
	Built-in sensor power supply	-	-	-
IP rating	IP66	IP66	IP66	
Terminals	Screw terminals	■	■	■
	PCB terminals	-	-	-
	11-pin socket	-	-	-
Supply voltage	100 to 240 VAC	-	-	-
	12 to 24 VDC	-	-	-
	24 VDC	□	□	□
	Comms	-	-	-
Functions	Up	■	■	-
	Down	-	-	-
	Up/down	-	-	-
	Reversible	-	-	-
	Speed	0 to 30 Hz or 0 to 1 kHz	-	1 or 10 kHz
	Counting range	0 to 99999999	0.0 h to 999999.9 h <--> 0.0 h to 3999 d 23.9 h or 0 s to 999 h 59 min 59 s <--> 0.0 min to 9999 h 59.9 min	1000 s <sup>-1</sup> or 1000 min <sup>-1</sup> ; 1000 s <sup>-1</sup> or 1000 min <sup>-1</sup> <--> 10000 min <sup>-1</sup>
Colour	Beige	■	■	■
	Black	■	■	■
	Page	360	361	362

Counter type		Pre-set counter/timer	Pre-set counter	Cam positioner
Selection criteria				
	Model	<b>H8GN</b>	<b>H7CX</b>	<b>H8PS</b>
	Display	LCD negative transmissive		LCD negative transmissive
	Size	1/32 DIN	1/16 DIN	1/4 DIN
Outputs	Control outputs	1 relay (SPDT)	1 relay (SPDT), transistor	NPN or PNP, cam outputs 8/16/32, run out, tachometer
	5 stage	■	□	–
	Total	■	□	–
	Time	■	–	–
	Preset	■	□	–
	Batch	■	□	–
	Dual	■	□	–
Tachometer	–	□	–	
Inputs	Control inputs	No-voltage	No-voltage, PNP/NPN	Encoder
Features	Dual operation	■	■	□
	Number of digits	PV: 4, SV: 4	PV: 4, SV: 4 or PV: 6, SV: 6	7
	NPN/PNP switch	–	■	–
	Back-lit	–	■	■
	External reset	■	■	–
	Manual reset	■	■	8 (16- and 32-output models only)
	Number of banks	4	–	–
	Built-in sensor power supply	–	■	–
IP rating	IP66	IP66	IP40	
Terminals	Screw terminals	■	■	■
	PCB terminals	–	–	■
	11-pin socket	–	□	–
Supply voltage	100 to 240 VAC	–	■	–
	12 to 24 VDC	–	■	–
	24 VDC	■	–	■
	Comms	□	–	–
Functions	Up	■	■	–
	Down	■	■	–
	Up/down	–	■	–
	Reversible	■	■	–
	Speed	0 to 30 Hz or 0 to 5 kHz	0 to 30 Hz or 0 to 5 kHz	–
	Counting range	-999 to 9999	-99999 to 999999	–
Colour	Beige	–	–	■
	Black	■	■	–
	Page	363	364	365

■ Standard

□ Available

– No/not available



## Self-powered LCD totaliser

The H7E series is available with large display with 8.6 mm character height. It includes models with backlight for improved visibility in dimly lit places. The H7E family includes total counters, time counters, tachometers and PCB-mounted counters.

- Size in mm (HxWxD): 24x48x55.5, 1/32 DIN size housing
- 8 digits, 8.6 mm character height
- Black or light-grey housing
- Dual input speed: 30 Hz <-> 1 kHz
- Short body: all models have a depth of 48.5 mm

## Ordering information

Count input	Max. counting speed	Display	Order code	
			Light grey body	Black body
No-voltage	30 Hz <-> 1 kHz (switchable)	7-segment LCD	H7EC-N	H7EC-N-B
PNP/NPN universal DC voltage input	30 Hz <-> 1 kHz (switchable)	7-segment LCD	H7EC-NV	H7EC-NV-B
		7-segment LCD with backlight	H7EC-NV-H	H7EC-NV-BH
AC/DC multi-voltage input	20 Hz	7-segment LCD	H7EC-NFV	H7EC-NFV-B

## Specifications

Item	H7EC-NV-_/H7EC-NV-_H	H7EC-NFV-_	H7EC-N-_
Operating mode	Up type		
Mounting method	Flush mounting		
External connections	Screw terminals, optional wire-wrap terminals		
Number of digits	8		
Display	7-segment LCD with or without backlight, zero suppression (character height: 8.6 mm)		
Max. counting speed	30 Hz/1 kHz	20 Hz	30 Hz/1 kHz
Case color	Light grey or black (-B models)		
Attachment	Waterproof packing, flush mounting bracket		
Supply voltage	Backlight model: 24 VDC (0.3 W max.) (only for backlight) No-backlight model: Not required (powered by built-in battery)	Not required (powered by built-in battery)	
Count input	High (logic) level: 4.5 to 30 VDC Low (logic) level: 0 to 2 VDC (input impedance: Approx. 4.7 kΩ)	High (logic) level: 24 to 240 VAC/VDC, 50/60 Hz Low (logic) level: 0 to 2.4 VAC/VDC, 50/60 Hz	No voltage input Maximum short-circuit impedance: 10 kΩ max. Short-circuit residual voltage: 0.5 V max. Minimum open impedance: 750 kΩ min.
Reset input		No voltage input Maximum short-circuit impedance: 10 kΩ max. Short-circuit residual voltage: 0.5 V max. Minimum open impedance: 750 kΩ min.	
Minimum signal width	20 Hz: 25 ms, 30 Hz: 16.7 ms, 1 KHz: 0.5 ms		
Reset system	External reset and manual reset: Minimum signal width of 20 ms		
Ambient temperature	Operating: -10 to 55°C (with no condensation or icing), storage: -25 to 65°C (with no condensation or icing)		
Degree of protection	Front-panel: IP66, NEMA4, terminal block: IP20		
Battery life (reference)	7 years min. with continuous input at 25°C (lithium battery)		
Size in mm (HxWxD)	24x48x55.5		



## Self-powered time counter

The H7E series is available with large display with 8.6mm character height. It includes models with backlight for improved visibility in dimly lit places. The H7E family includes total counters, time counters, tachometers and PCB-mounted counters.

- Size in mm (HxWxD) 24x48x55.5, 1/32 DIN size housing
- 7 digits, 8.6mm character height
- Black or light-grey housing
- Dual time range 999999.9h <-> 3999d23.9h (switchable)  
or 999 h 59 m 59 s <-> 9999 h 59.9m


### Ordering information

Timer input	Display	Order code			
		Time range 999999.9h <-> 3999d23.9h (switchable)		Time range 999h59m59s <-> 9999h59.9m	
		Light grey body	Black body	Light grey body	Black body
No-voltage input	7-segment LCD	H7ET-N	H7ET-N-B	H7ET-N1	H7ET-N1-B
PNP/NPN universal DC voltage input	7-segment LCD	H7ET-NV	H7ET-NV-B	H7ET-NV1	H7ET-NV1-B
AC/DC multi-voltage input	7-segment LCD with backlight	H7ET-NV-H	H7ET-NV-BH	H7ET-NV1-H	H7ET-NV1-BH
	7-segment LCD	H7ET-NFV	H7ET-NFV-B	H7ET-NFV1	H7ET-NFV1-B

### Specifications

Item	H7ET-NV _ /H7ET-NV _ _ H	H7ET-NFV _ _	H7ET-N _ _
Operating mode	Accumulating		
Mounting method	Flush mounting		
External connections	Screw terminals		
Display	7-segment LCD with or without backlight, zero suppression (character height: 8.6 mm)		
Number of digits	7		
Case color	Light grey or black (-B models)		
Attachment	Waterproof packing, flush mounting bracket, time unit labels		
Supply voltage	Backlight model: 24 VDC (0.3 W max.) (for backlight) No-backlight model: Not required (powered by built-in battery)	Not required (powered by built-in battery)	
Timer input	High (logic) level: 4.5 to 30 VDC Low (logic) level: 0 to 2 VDC (Input impedance: Approx. 4.7 kΩ)	High (logic) level: 24 to 240 VAC/VDC, 50/60 Hz Low (logic) level: 0 to 2.4 VAC/VDC, 50/60 Hz	No voltage input Maximum short-circuit impedance: 10 kΩ max. Short-circuit residual voltage: 0.5 V max. Minimum open impedance: 750 kΩ min.
Reset input		No voltage input Maximum short-circuit impedance: 10 kΩ max. Short-circuit residual voltage: 0.5 V max. Minimum open impedance: 750 kΩ min.	
Minimum pulse width	1 s		
Reset system	External reset and manual reset: Minimum signal width of 20 ms		
Ambient temperature	Operating: -10 to 55°C (with no condensation or icing), storage: -25 to 65°C (with no condensation or icing)		
Time accuracy	±100 ppm (25°C)		
Degree of protection	Front-panel: IP66, NEMA4 with waterproof packing, terminal block: IP20		
Battery life (reference)	10 years min. with continuous input at 25°C (lithium battery)		
Size in mm (HxWxD)	24x48x55.5		

### Self-powered tachometer

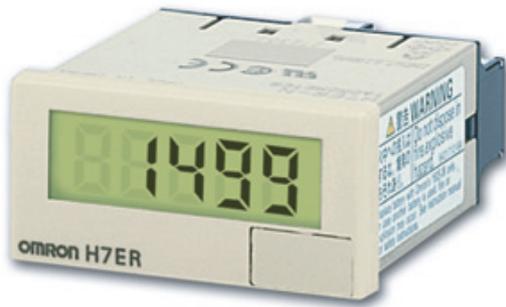

The H7E series is available with large display with 8.6mm character height. It includes models with backlight for improved visibility in dimly lit places. The H7E family includes total counters, time counters, tachometers and PCB-mounted counters.

- Size in mm (HxWxD) 24x48x53.5, 1/32 DIN size housing
- 5 digits, 8.6mm character height
- Black or light-grey housing
- Dual revolution display

### Ordering information

Count input	Display	Order code			
		Max. revolutions displayed (applicable encoder resolution)			
		1,000 s <sup>-1</sup> (1 pulse/rev.) 1,000 min <sup>-1</sup> (60 pulse/rev.)		1,000.0 s <sup>-1</sup> (10 pulse/rev) 1,000.0 min <sup>-1</sup> (600 pulse/rev) <-> 10,000 min <sup>-1</sup> (60 pulse/rev) (switchable)	
		Light grey body	Black body	Light grey body	Black body
No-voltage input	7-segment LCD	H7ER-N	H7ER-N-B		
PNP/NPN universal	7-segment LCD	H7ER-NV	H7ER-NV-B	H7ER-NV1	H7ER-NV1-B
DC voltage input	7-segment LCD with backlight	H7ER-NV-H	H7ER-NV-BH	H7ER-NV1-H	H7ER-NV1-BH

### Specifications

Item	H7ER-NV1-_/H7ER-NV1-_H	H7ER-NV-_ /H7ER-NV-_H	H7ER-N-_
<b>Operating mode</b>	Up type		
<b>Mounting method</b>	Flush mounting		
<b>External connections</b>	Screw terminals, wire-wrap terminals		
<b>Display</b>	7-segment LCD with or without backlight, zero suppression (character height: 8.6 mm)		
<b>Number of digits</b>	5	4	
<b>Max. revolutions displayed</b>	1,000.0 s <sup>-1</sup> (when encoder resolution of 10 pulse/rev is used) 1,000.0 min <sup>-1</sup> (when encoder resolution of 600 pulse/rev is used) <-> 10,000 min <sup>-1</sup> (when encoder resolution of 60 pulse/rev is used) (switchable with switch)	1,000 s <sup>-1</sup> (when encoder resolution of 1 pulse/rev is used) 1,000 min <sup>-1</sup> (when encoder resolution of 60 pulse/rev is used)	
<b>Attachment</b>	Waterproof packing, flush mounting bracket, revolution unit labels		
<b>Supply voltage</b>	Backlight model: 24 VDC (0.3 W max.) (for backlight lit) No-backlight model: Not required (powered by built-in battery)		Not required (powered by built-in battery)
<b>Count input</b>	High (logic) level: 4.5 to 30 VDC Low (logic) level: 0 to 2 VDC (Input impedance: Approx. 4.7 kΩ)		No voltage input Maximum short-circuit impedance: 10 kΩ max. Short-circuit residual voltage: 0.5 V max. Minimum open impedance: 750 kΩ min.
<b>Max. counting speed</b>	10 kHz	1 kHz	
<b>Minimum signal width</b>	10 kHz: 0.05 ms, 1 kHz: 0.5 ms		
<b>Ambient temperature</b>	Operating: -10 to 55°C (with no condensation or icing), storage: -25 to 65°C (with no condensation or icing)		
<b>Degree of protection</b>	Front-panel: IP66, NEMA4 with waterproof packing, terminal block: IP20		
<b>Battery life (reference)</b>	7 years min. with continuous input at 25°C (lithium battery)		
<b>Size in mm (HxWxD)</b>	24x48x53.5		



## World's smallest compact preset counter/timer

The H8GN is a 1/32 DIN timer and counter in one. It is simple to switch between the timer and counter functions. During operation it is also possible to switch the display to monitor the totalising count value in 8 digits. Many sophisticated functions come as standard with H8GN.

- Size in mm (HxWxD) 24x48x83, 1/32 DIN size housing
- 8-digit display, 4 value and 4 set value
- Front mounting
- -999 to 9999
- 24 VDC

### Ordering information

Functions		Supply voltage	Output	Order code	
Counter	Timer			Communications	
				No communications	RS-485
Counter: Up/down/reversible, 4 digits, N, F, C or K output modes Total counter: 8 digits	A: ON-delay B: Flicker D: Signal OFF-delay E: Interval F: Accumulative Z: ON/OFF-duty adjustable flicker	24 VDC	Contact output (SPDT)	H8GN-AD	H8GN-AD-FLK

### Specifications

<b>Rated supply voltage</b>		24 VDC
<b>Operating voltage range</b>		85 to 110% of rated supply voltage
<b>Power consumption</b>		1.5 W max. (for max. DC load) (inrush current: 15 A max.)
<b>Mounting method</b>		Flush-mounting
<b>External connections</b>		Screw terminals (M3 screws)
<b>Terminal screw tightening torque</b>		0.5 Nm max.
<b>Attachment</b>		Waterproof packing, flush-mounting bracket
<b>Display</b>		7-segment, negative transmissive LCD; time display (h, min, s); CMW, OUT, RST, TOTAL Present value (red, 7 mm high characters); set value (green, 3.4 mm high characters)
<b>Digits</b>		PV: 4 digits, SV: 4 digits, when total count value is displayed: 8 digits (zeros suppressed)
<b>Memory backup</b>		EEPROM (non-volatile memory) (number of writes: 100,000 times)
<b>Counter</b>	<b>Maximum counting speed</b>	30 Hz or 5 kHz
	<b>Counting range</b>	-999 to 9,999
	<b>Input modes</b>	Increment, decrement, individual, quadrature inputs
<b>Timer</b>	<b>Timer modes</b>	Elapsed time (up), remaining time (down)
<b>Inputs</b>	<b>Input signals</b>	For counter: CP1, CP2, and reset For timer: Start, gate, and reset
	<b>Input method</b>	No-voltage input (contact short-circuit and open input) Short-circuit (ON) impedance: 1 k $\Omega$ max. (approx. 2 mA runoff current at 0 $\Omega$ ) Short-circuit (ON) residual voltage: 2 VDC max. Open (OFF) impedance: 100 k $\Omega$ min. Applied voltage: 30 VDC max.
	<b>Start, reset, gate</b>	Minimum input signal width: 1 or 20 ms (selectable)
	<b>Power reset</b>	Minimum power-opening time: 0.5 s
<b>Control output</b>		SPDT contact output: 3 A at 250 VAC/30 VDC, resistive load (cos $\phi$ = 1)
<b>Minimum applied load</b>		10 mA at 5 VDC (failure level: P, reference value)
<b>Reset system</b>		External, manual, and power supply resets (for timer in A, B, D, E, or Z modes)
<b>Sensor waiting time</b>		260 ms max. (inputs cannot be received during sensor wait time if control outputs are turned OFF)
<b>Timer function</b>	<b>Accuracy of operating time and setting error (including temperature and voltage effects)</b>	Signal start: $\pm 0.03\%$ $\pm 30$ ms max. Power-ON start: $\pm 0.03\%$ $\pm 50$ ms max.
<b>Ambient temperature</b>	<b>Operating storage</b>	-10 to 55°C (with no icing or condensation)
		-25 to 65°C (with no icing or condensation)
<b>Case color</b>		Rear section: Grey smoke; front section: N1.5 (black)
<b>Degree of protection</b>		Panel surface: IP66 and NEMA Type 4X (indoors); rear case: IP20, terminal block: IP20
<b>Size in mm (HxWxD)</b>		24x48x83



## The most complete digital standard counter on the market

H7CX offers you the most complete series of products on the market today. Based on extensive customer research, these new counters have been designed with added-value features that users both need and appreciate.

- Size in mm (HxWxD) 48x48x64 to 100 mm, 1/16 DIN size housing
- Two-colour display value, red or green
- Front-mounting/plug-in
- 6-digit model -99999 to 999999, set value -99999 to 999999 or 0 to 999999
- Input contact, NPN or PNP

### Ordering information

Type	External connection	Sensor power supply	Supply voltage	Output type	Digits	Size in mm (HxWxD)	Order code
1-stage counter	Screw terminal	12 VDC	100 to 240 VAC	Contact and transistor output	6	48x48x106	H7CX-AU
1-stage counter with total counter			12 to 24 VDC/24 VAC	Transistor output (2x)			H7CX-AUD1
2-stage counter			100 to 240 VAC	Contact output (2x)			H7CX-AUSD1
1-stage counter with batch counter			12 to 24 VDC/24 VAC				H7CX-AW
Dual counter (addition/subtraction)							H7CX-AWD1
Tachometer							
1-stage counter	11-pin socket	12 VDC	100 to 240 VAC	Contact output		48x48x78.5	H7CX-A11
1-stage counter with total counter			12 to 24 VDC/24 VAC				H7CX-A11D1
			100 to 240 VAC	Transistor output			H7CX-A11S
			12 to 24 VDC/24 VAC				H7CX-A11SD1
	Screw terminal		100 to 240 VAC	Contact output		48x48x106	H7CX-A
			100 to 240 VAC	Transistor output			H7CX-AS

### Accessories

Name	Order code
Flush-mounting adapter	Y92F-30
Waterproof packing	Y92S-29
DIN-rail mounting/front-connecting socket	11-pin, finger safe type P2CF-11-E
Back-connecting socket	11-pin P3GA-11
	Finger safe terminal cover for P3GA-11 Y92A-48G
Hard cover	Y92A-48
Soft cover	Y92A-48F1

### Specifications

Display	7-segment, negative transmissive LCD
Digits	6-digits: -99,999 to 999,999, SV range: -99999 to 999999 or 0 to 999999
Max. counting speed	30 Hz or 5 kHz (selectable, ON/OFF ratio 1:1)
Input modes	Increment, decrement, command, individual, and quadrature
Control output	Contact output: 3 A at 250 VAC/30 VDC, resistive load ( $\cos\phi = 1$ ) Minimum applied load: 10 mA at 5 VDC Transistor output: NPN open collector, 100 mA at 30 VDC Residual voltage: 1.5 VDC max. (approx. 1V) Leakage current: 0.1 mA max. NEMA B300 Pilot Duty, 1/4 HP 3 A resistive load at 120 VAC, 1/3 HP 3 A resistive load at 240 VAC
Key protection	Yes
Decimal point adjustment	Yes (rightmost 3 digits)
Sensor waiting time	250 ms max.
Memory backup	EEPROM (overwrites: 100,000 times min.) stores data 10 years min.
Ambient temperature	Operating: -10 to 55°C (-10 to 50°C when mounted side by side)
Case color	Black (N1.5), light grey (Munsell 5Y7/1, produced upon request)
Life expectancy	Mechanical: 10,000,000 operations min. Electrical: 100,000 operations min. (3 A at 250 VAC, resistive load)
Degree of protection	Panel surface: IP66, NEMA 4 (indoors)



### Compact, easy-to-use cam positioner

The H8PS provides high-speed operation at 1,600 r/min and high-precision settings to 0.5° ensuring widespread application. H8PS features a highly visible display with back-lit negative transmissive LCD. Advance angle compensation function compensates for output delays.

- 96 to 121.2Hx96Wx60.6 to 67.5D mm
- Front-panel / DIN-rail
- 24 VDC
- 8-, 16- and 32-outputs
- NPN/PNP 100 mA at 30 VDC

### Ordering information

Number of outputs	Mounting method	Output configuration	Bank function	Size in mm (HxWxD)	Order code
8-outputs	Flush-mounting	NPN transistor output	No	96x96x67.5	H8PS-8B
		PNP transistor output			H8PS-8BP
	Front-mounting/DIN-rail mounting	NPN transistor output		96x96x60.6	H8PS-8BF
		PNP transistor output			H8PS-8BFP
16-outputs	Flush-mounting	NPN transistor output	Yes	96x96x67.5	H8PS-16B
		PNP transistor output			H8PS-16BP
	Front-mounting/DIN-rail mounting	NPN transistor output		121.2x96x60.6	H8PS-16BF
		PNP transistor output			H8PS-16BFP
32-outputs	Flush-mounting	NPN transistor output	Yes	96x96x67.5	H8PS-32B
		PNP transistor output			H8PS-32BP
	Front-mounting/DIN-rail mounting	NPN transistor output		121.2x96x60.6	H8PS-32BF
		PNP transistor output			H8PS-32BFP

### Accessories

Type	Resolution	Cable length	Order code	Name	Specification	Order code
Economy	256	2 m	E6CP-AG5C-C 256 2M	<b>Discrete wire output cable</b>	2 m	Y92S-41-200
Standard	256	1 m	E6C3-AG5C-C 256 1M	<b>Connector-type output cable</b>	2 m	E5ZE-CBL200
		2 m	E6C3-AG5C-C 256 2M	<b>Support software</b>	CD-ROM	H8PS-SOFT-V1
	360	2 m	E6C3-AG5C-C 360 2M	<b>USB cable</b>	A miniB, 2 m	Y92S-40
	720		E6C3-AG5C-C 720 2M	<b>Parallel input adapter</b>	Two units can operate in parallel	Y92C-30
Rigid	256	2 m	E6F-AG5C-C 256 2M	<b>Protective cover</b>		Y92A-96B
	360		E6F-AG5C-C 360 2M	<b>Watertight cover</b>		Y92A-96N
	720		E6F-AG5C-C 720 2M	<b>DIN-rail mounting base</b>		Y92F-91

### Encoder accessories

Name	Specification	Order code
<b>Shaft coupling for the E6CP</b>	Axis: 6 mm dia.	E69-C06B
<b>Shaft coupling for the E6C3</b>	Axis: 8 mm dia.	E69-C08B
<b>Shaft coupling for the E6F</b>	Axis: 10 mm dia.	E69-C10B
<b>Extension cable</b>	5 m (same for E6CP, E6C3, and E6F)	E69-DF5

### Specifications


<b>Rated supply voltage</b>	24 VDC		
<b>Inputs</b>	<b>Encoder input</b>	8-output models: None; 16-/32-output models: Bank inputs 1/2/4, origin input, start input	
	<b>External inputs</b>	<b>Input signals</b>	8-output models: None; 16-/32-output models: Bank inputs 1/2/4, origin input, start input
		<b>Input type</b>	No voltage inputs: ON impedance: 1 kΩ max. (leakage current: Approx. 2 mA at 0 Ω) ON residual voltage: 2 V max., OFF impedance: 100 kΩ min., applied voltage: 30 VDC max. Minimum input signal width: 20 ms
<b>Number of banks</b>	8 banks (for 16-/32-output models only)		
<b>Display method</b>	7-segment, negative transmissive LCD (main display: 11 mm (red), sub-display: 5.5 mm (green))		
<b>Memory backup method</b>	EEPROM (overwrites: 100,000 times min.) that can store data for 10 years min.		
<b>Ambient operating temperature</b>	-10 to 55°C (with no icing or condensation)		
<b>Storage temperature</b>	-25 to 65°C (with no icing or condensation)		
<b>Ambient humidity</b>	25 to 85%		
<b>Degree of protection</b>	Panel surface: IP40, rear case: IP20		
<b>Case color</b>	Light grey (Munsell 5Y7/1)		

## FLEXIBLE AUTOMATION EXPANDED

### ZEN-C4 – More flexibility with RS-485 communication

Our range is extended with a communication model. Now you have the possibility to connect several ZEN in a network environment. This will enhance the ZEN series to solve even more applications.

- RS-485 communication
- To connect up to 32 units
- Easy CompoWayF protocol

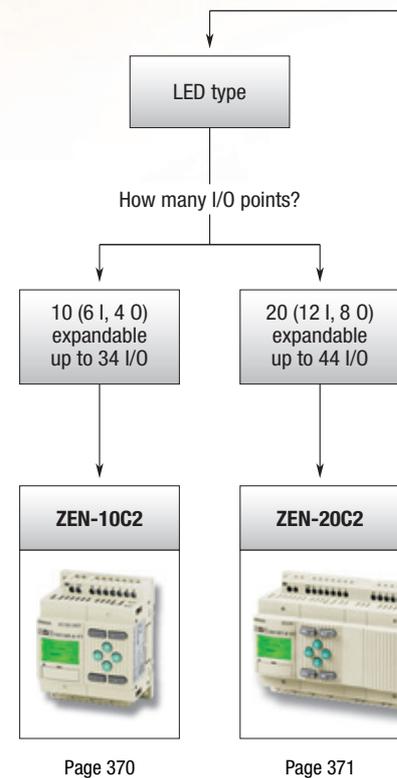



What functionality is required?

Display type with buttons, calendar and clock

Expansion unit

How many I/O points?

How many extra I/O points?

10 (6 I, 4 O) expandable up to 34 I/O

20 (12 I, 8 O) expandable up to 44 I/O

10 (6 I, 4 O) fixed I/O

20 (12 I, 8 O) fixed I/O

10 (6 I, 4 O) expandable up to 33 I/O with communication

8 I/O (4 I, 4 O)

ZEN-10C1

ZEN-20C1

ZEN-10C3

ZEN-20C3

ZEN-10C4

ZEN-8E



Page 370

Page 371

Page 370

Page 371

Page 370

Page 372



				
Model	ZEN-10C	ZEN-20C		
Type	CPU unit	CPU unit		
Features C1	With LCD Display, program/control buttons, calendar and real-time clock	With LCD display, program/control buttons, calendar and real-time clock		
Features C2	With LED indication Logic control Programming by software	With LED indication Logic control Programming by software		
Features C3	Same as C1 but not expandable.	Same as C1 but not expandable.		
Features C4	Same as C1 but instead of one output relay you get RS-485 communication.	–		
Features Starter kits	Complete set with C1 CPU including software, cable and manual	–		
Number of I / O points	10 expandable up to 34 I/O (C4 up to 33 I/O)	20 expandable up to 44 I/O		
Inputs	6	12		
Inputs/power supply	100 to 240 VAC or 12 to 24 VDC	100 to 240 VAC or 12 to 24 VDC		
Outputs	4 relays (C4 = 3 relays) or 4 transistors	8 relays or 8 transistors		
Page	370	371		



## Flexible automation

With the choice of 4 different 10 I/O CPU units we fulfill all needed functionality to do all kind of control automation. Three of them (C1/C2/C4) are expandable up to 34 I/O. The C3 has fixed 10 I/O. All DC models have analog input and a high-speed counter input up to 150Hz. The C4 model is equipped with communication.

- DC input/supply units have analog input + high speed counter
- The ZEN-10C4 has RS-485 communication
- Expansion available with relay output or transistor output
- ZEN-Kits the best choice to start!

## Ordering information

Name	Number of I/O points	Inputs (I)/ power supply	Outputs (O)	Type	LCD, buttons (B), calendar and clock	Analog input/comparators (A)	8-digit counter (F)/ comparators (G)	No. of bits 16	No. of bits 8	Size in mm (HxWxD)	Order code
CPU units	10 Expandable up to 34 I/O	6 100 to 240 VAC	4 Relays	LCD	yes	–	–	Work bits (M) Holding bits (H) Timers (T) Counters (C) Weekly timers (@) LCD display (D) Timer/counter comparator (P)	Holding timers (#) Button input (B)	90x70x56	ZEN-10C1AR-A-V2
				LED	–	–	–				ZEN-10C2AR-A-V2
		12 to 24 VDC	LCD	yes	yes / 4	yes / 4	ZEN-10C1DR-D-V2				
			LED	–	yes / 4	yes / 4	ZEN-10C2DR-D-V2				
	Fixed I/O	100 to 240 VAC	3 Transistors	LCD	yes	yes / 4	yes / 4				ZEN-10C1DT-D-V2
				LED	–	yes / 4	yes / 4				ZEN-10C2DT-D-V2
		12 to 24 VDC	Relays	LCD	yes	–	yes / 4				ZEN-10C3AR-A-V2
				LED	yes	yes / 4	yes / 4				ZEN-10C3DR-D-V2
10 Expandable up to 33 I/O	100 to 240 VAC	3 Relays	LCD/Comm.	yes	–	yes / 4	ZEN-10C4AR-A-V2				
			12 to 24 VDC	LCD/Comm.	yes	yes / 4	yes / 4	ZEN-10C4DR-D-V2			
ZEN kit	Set containing CPU unit (ZEN-10C1AR-A-V2), connecting cable, ZEN support software and manual.										ZEN-KIT01-EV4
	Set containing CPU unit (ZEN-10C1DR-D-V2), connecting cable, ZEN support software and manual.										ZEN-KIT02-EV4

## Specifications

Item	Specifications	
	ZEN-10C_AR-A-V2	ZEN-10C_D_-D-V2
Power supply voltage	100 to 240 VAC, 50/60 Hz	12 to 24 VDC (DC ripple rate: 5%)
Rated power supply voltage	85 to 264 VAC	10.8 to 28.8 VDC
Power consumption	9 VA max.	4 W max.
Inrush current	3 A max.	30 A max.
Ambient temperature	0°C to 55°C (-25°C to 55°C for ZEN-10C2 models (LED))	
Ambient storage	-20°C to 55°C (-40°C to 75°C for ZEN-10C2 models (LED))	
Control method	Stored program control	
I/O control method	Cyclic scan	
Programming language	Ladder diagram	
Program capacity	96 lines (3 input conditions and 1 output per line)	
LCD display	12 characters x 4 lines, with backlight (LCD-type CPU unit only)	
Operation keys	8 (4 cursor keys and 4 operation keys) (LCD-type CPU unit only)	
Super-capacitor holding time	2 days min. (25°C)	
Battery life (ZEN-BAT01)	10 years min. (25°C)	
Calendar & Clock function	Accuracy: ± 15 s/month (at 25°C)	

## Accessoires

Name	Description	Order code
Memory Cassette	EEPROM (for data security and copying)	ZEN-ME01
Battery unit	Battery (keeps time, date and bit values for 10 years at 25°C)	ZEN-BAT01
Connecting Cable	For the programming software, RS-232C cable, 9-way 'D' connector for PC	ZEN-CIF01
ZEN support software	Runs on Windows 95, 98, 2000, ME, XP or NT4.0	ZEN-SOFT01-V4



## Extended flexible automation

With the ZEN-20 I/O you get in one unit 12 Inputs and 8 Outputs relays or transistor. Herewith you can do a lot of bigger scale automation whereas the 10 I/O versions are just short of I/O's. The 20 I/O unit is available in three different versions starting from C1 with LCD display, control/ program buttons, calendar and clock or C2 with LED status indication or C3 same as C1 but fixed I/O.

- ZEN-20C1/C2 expandable up to 44 I/Os
- ZEN DC units have analog input 0-10 VDC
- DC models have as well high speed counter 150 Hz
- Expansion available with relay output or transistor output

## Ordering information

Name	Number of I/O points	Inputs (I)/ power supply	Outputs (O)	Type	LCD, buttons (B), calendar and clock	Analog input/comparators (A)	8-digit counter (F)/ comparators (G)	No. of bits 16	No. of bits 8	Size in mm (HxWxD)	Order code		
CPU units	20	12	100 to 240 VAC 12 to 24 VDC	8	Relays	LCD	yes	–	–	Work bits (M) Holding bits (H) Timers (T) Counters (C) Weekly timers (@) LCD display (D) Timer/counter comparator (P)	Holding timers (#) Button input (B)	90x122.5 x56	ZEN-20C1AR-A-V2
						LED	–	–	ZEN-20C2AR-A-V2				
						LCD	yes / 4	yes / 4	ZEN-20C1DR-D-V2				
						LED	–	yes / 4	ZEN-20C1DR-D-V2				
	Expandable up to 44 I/O	12	100 to 240 VAC 12 to 24 VDC	8	Transistors	LCD	yes	yes / 4	yes / 4				ZEN-20C1DT-D-V2
						LED	–	yes / 4	yes / 4				ZEN-20C2DT-D-V2
						LCD	yes	–	yes / 4				ZEN-20C3AR-A-V2
						LCD	yes	yes / 4	yes / 4				ZEN-20C3DR-D-V2
Fixed I/O	12	100 to 240 VAC 12 to 24 VDC	8	Relays	LCD	yes	–	yes / 4	ZEN-20C1AR-A-V2				
					LCD	yes	yes / 4	yes / 4	ZEN-20C3DR-D-V2				

## Specifications

Item	Specifications	
	ZEN-20C_AR-A-V2	ZEN-20C_D_-D-V2
Power supply voltage	100 to 240 VAC, 50/60 Hz	12 to 24 VDC (DC ripple rate: 5%)
Rated power supply voltage	85 to 264 VAC	10.8 to 28.8 VDC
Power consumption	11 VA max.	5 W max.
Inrush current	4 A max.	30 A max.
Ambient temperature	0°C to 55°C (-25°C to 55°C for ZEN-20C2 models (LED))	
Ambient storage	-20°C to 55°C (-40°C to 75°C for ZEN-20C2 models (LED))	
Control method	Stored program control	
I/O control method	Cyclic scan	
Programming language	Ladder diagram	
Program capacity	96 lines (3 input conditions and 1 output per line)	
LCD display	12 characters x 4 lines, with backlight (LCD-type CPU unit only)	
Operation keys	8 (4 cursor keys and 4 operation keys) (LCD-type CPU unit only)	
Super-capacitor holding time	2 days min. (25°C)	
Battery life (ZEN-BAT01)	10 years min. (25°C)	
Calendar & Clock function	Accuracy: ± 15 s/month (at 25°C) if applicable	

## Accessoires

Name	Description	Order code
Memory Cassette	EEPROM (for data security and copying)	ZEN-ME01
Battery unit	Battery (keeps time, date and bit values for 10 years at 25°C)	ZEN-BAT01
Connecting Cable	For the programming software, RS-232C cable, 9-way 'D' connector for PC	ZEN-CIF01
ZEN support software	Runs on Windows 95, 98, 2000, ME, XP or NT4.0	ZEN-SOFT01-V4



## ZEN Expansion units

To enlarge your ZEN application we provide three different expansion units in only 35 mm width ZEN housing. All expansion units have standard 4 inputs and 4 outputs. You can add maximum 3 expansion units to one CPU.

- 4 inputs, 100 to 240VAC or 12 to 24VDC
- 4 outputs, either relays or transistors (only DC models)
- DIN-rail mounting
- Size in mm (HxWxD): 90x35x56

## Ordering information

Name	Number of I/O points	Inputs (X)/ power supply	Outputs (Y)	Size in mm (HxWxD)	Order code
Expansion I/O units	8	4 100 to 240 VAC 12 to 24 VDC	4 Relays	90x35x56	ZEN-8E1AR
			4 Transistors		ZEN-8E1DR
					ZEN-8E1DT

## Specifications

Item	Specifications	
	ZEN-8E1AR	ZEN-8E1D_
Power supply voltage	100 to 240 VAC, 50/60 Hz	12 to 24 VDC (DC ripple rate: 5% max.)
Rated power supply voltage	85 to 264 VAC	10.8 to 28.8 VDC
Power consumption	4 VA max.	2 W max.
Inrush current	1.5 A max.	15 A max.
Ambient temperature	0°C to 55°C (-25°C to 55°C for ZEN-10C2 models (LED))	
Ambient storage	-20°C to 55°C (-40°C to 75°C for ZEN-10C2 models (LED))	



## ZEN Power Supply

The ZEN Power Supply has the same compact housing as our 10 I/O CPU units. With a current/wattage output of 1.3 A/30 W it covers enough power to supply the DC ZEN itself and the eventually used sensors. If needed parallel operation is possible.

- Output voltage 24 VDC
- Output current 1.3 A
- Capacity 30 W
- Allows parallel operation
- Size in mm (HxWxD): 90x70x56

### Ordering information

Power rating	Inputs voltage	Output current	Order code
30 W	100 to 240 VAC	1.3 A	ZEN-PA03024

### Specifications


Item	Specifications	
Power rating	30 W	
Efficiency	80% min. (24 V)	
Input voltage	100 to 240 VAC (85 to 264 VAC), single-phase	
Output voltage	Voltage adjustment	±10% to ±15% (with V. ADJ) min. of rate output voltage
	Ripple	2% (p-p) max. (-25°C to -10°C: 4% max.)
	Input variation	0.5% max.
	Temperature	0.05% / °C max.
Overload protection	105% to 135% of rated load current, inverted L drop, intermittent	
Overvoltage protection	yes	
Input Current	100 V	0.8 A max.
	200 V	0.45 A max.
Output indicator	yes (green)	
Weight	240 g max.	
Operating temperature	-10°C to 60°C	
Parallel operation	yes (2 units max.)	

## LOOKING FOR A PERFECT MEASURING & READ-OUT!

### K3HB-V – For perfect weighing

With our K3HB series we cover a wide range of applications. One of them is the weighing indicator which performs perfect measurement in any weighing application. The instrument can be equipped with a load-cell power supply of 10 V/100 mA. Several option boards for communication, contact output boards or event inputs are also available. On top of these you can get direct DeviceNet communication.

- High speed sampling 20 ms
- Equipped with position meter
- Two color display for easy recognition

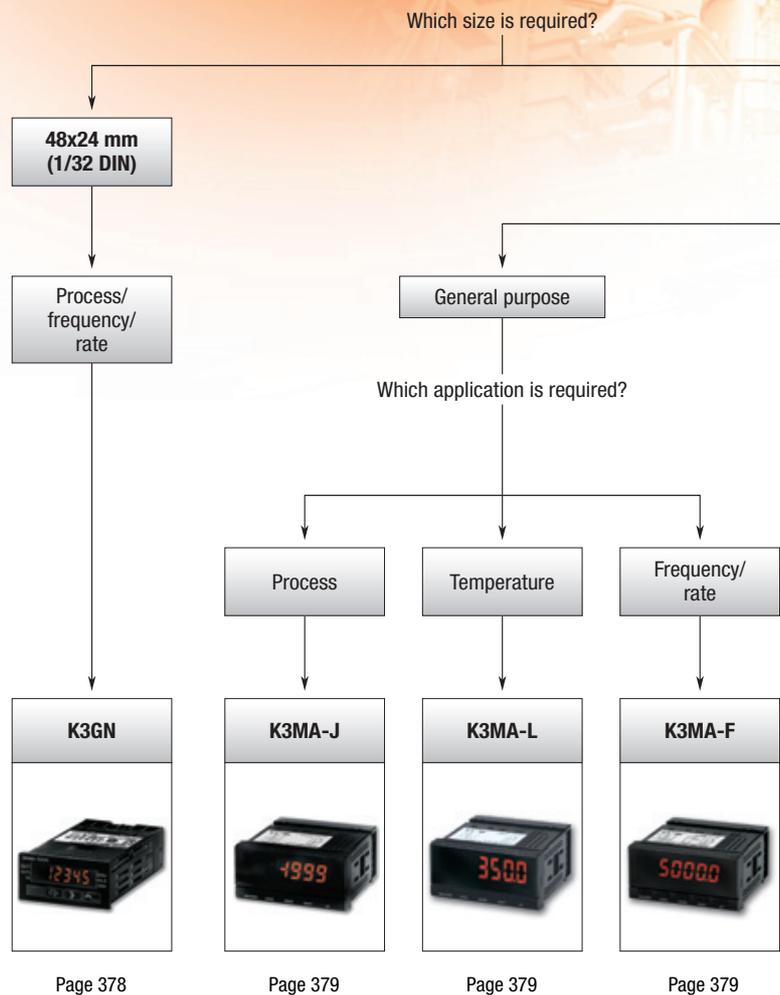




96x48 mm  
(1/8 DIN)

Advanced

Which application is required?

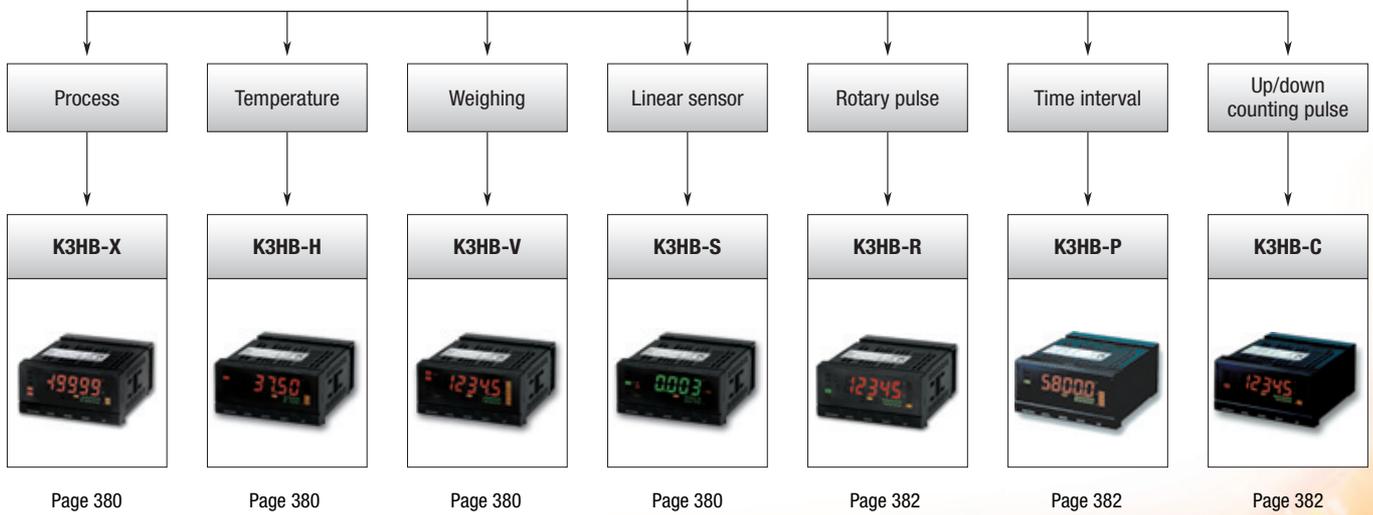

# Selection table

Category		Multifunctional digital panel indicator	Process indicator	Temperature indicator	Frequency/rate indicator	Process indicator
Selection criteria						
	Model	K3GN	K3MA-J	K3MA-L	K3MA-F	K3HB-X
	Size	1/32 DIN	1/8 DIN			
Features	Colour change display	■	■	■	■	■
	Number of digits	5	5	4	5	5
	Leading zero suppression	■	■	■	■	■
	Forced zero function	■	■	■	■	■
	Min./max. hold function	■	■	■	■	■
	Average processing	■	■	■	■	■
	User selectable inputs	■	■	■	■	■
	Start-up compensating time	■	–	–	■	–
	Key protection	■	■	■	■	■
	Decimal point position setting	■	■	■	■	■
	Accuracy	±0.1% of full scale	±0.1% of full scale	±0.1% of full scale	±0.1% of full scale	±0.1% of full scale (DC voltage & DC current), ±0.5% of full scale (AC voltage & AC current)
	Input range	0 to 20 mA, 4 to 20 mA or 0 to 5 V, 1 to 5 V, -5 to 5 V, -10 to 10 V or 0 to 30 Hz or 0 to 5 kHz	0 to 20 mA, 4 to 20 mA or 0 to 5 V, 1 to 5 V, -5 to 5 V, -10 to 10 V	Pt100, JPt100 or thermocouple K, J, T, E, L, U, N, R, S, B	0 to 30 Hz or 0 to 5 kHz	0.000 to 10.000 A, 0.0000 to 19.999 mA, -199.99 to 199.99 mA, 4.000 to 20.000 mA, 0.0 to 400.0 V, 0.0000 to 1.999 V, -199.99 to 199.99 V, 1.0000 to 5.0000 V
	Sample rate	250 ms	250 ms	500 ms	–	20 ms
	Features	Remote/local processing, parameter initialisation, programmable output configuration, process value hold	Teaching, comparative output pattern selection, parameter initialisation, programmable output configuration, process value hold	Programmable output configuration, process value hold	Teaching, comparative output pattern selection, programmable output configuration, process value hold	Scaling, teaching, averaging, output hysteresis, output OFF-delay, output test, bank selection, reset, comparative output
Sensor power supply	–	–	–	■	□	
Front protection	IP rating	IP66	IP66	IP66	IP66	IP66
	Supply voltage	24 VDC	24 VAC/VDC or 100 to 240 VAC	24 VAC/VDC or 100 to 240 VAC	24 VAC/VDC or 100 to 240 VAC	100 to 240 VAC or 24 VAC/VDC
Inputs	NPN	■	–	■	■	□
	PNP	■	–	■	■	□
	Temperature	v	–	–	–	–
	Contact	–	–	–	■	–
	Voltage pulse	–	–	–	■	–
	Load cell	–	–	–	–	–
	DC voltage	■	■	■	–	□
	DC current	■	■	–	–	□
	AC voltage	–	–	–	–	□
AC current	–	–	–	–	□	
Outputs	Relay	■	■	■	■	□
	NPN	■	–	–	–	□
	PNP	■	–	–	–	□
	Linear	–	–	–	–	□
	BCD	–	–	–	–	–
	Comms	■	–	–	–	□
Page	378	379				380

Temperature indicator	Weighing indicator	Linear sensor indicator	Up/down counting pulse indicator	Time interval indicator	Rotary pulse indicator
<b>K3HB-H</b>	<b>K3HB-V</b>	<b>K3HB-S</b>	<b>K3HB-C</b>	<b>K3HB-P</b>	<b>K3HB-R</b>
1/8 DIN				–	–
■	■	■	■	■	■
5	5	5	5	5	5
■	■	■	■	■	■
■	■	■	■	■	■
■	■	■	■	■	■
■	■	■	■	■	■
■	■	■	■	■	■
–	–	–	–	–	■
■	■	■	■	■	■
■	■	■	■	■	■
Thermocouple: $\pm 0.3\%$ of full scale, Pt-100: $\pm 0.2\%$ of full scale	$\pm 0.1\%$ of full scale	One input: $\pm 0.1\%$ of full scale, two inputs: $\pm 0.2\%$ of full scale		$\pm 0.08\%$ rgd $\pm 1$ digit	$\pm 0.006\%$ rgd $\pm 1$ digit $\pm 0.02\%$ rgd $\pm 1$ digit
Pt100, thermocouple K, J, T, E, L, U, N, R, S, B, W	0.00 to 199.99 mV, 0.000 to 19.999 mV, 100.00 mV, 199.99 mV	0 to 20 mA, 4 to 20 mA, 0 to 5 V, -5 to 5 V, -10 to 10 V	No voltage contact: 30 Hz, voltage pulse: 50 kHz, open collector: 50 kHz	No voltage contact: 30 Hz, voltage pulse: 50 kHz, open collector: 50 kHz	No voltage contact: 30 Hz, voltage pulse: 50 kHz, open collector: 50 kHz
20 ms	20 ms	0.5 ms	–	–	–
Scaling, teaching, averaging, output hysteresis, output OFF-delay, output test, bank selection, reset, comparative output	Scaling, teaching, averaging, output hysteresis, output OFF-delay, output test, bank selection, reset, comparative output	Scaling, 2-input calculation, teaching, averaging, output hysteresis, output OFF-delay, output test, bank selection, reset, comparative output	Scaling, measurement operation selection, output hysteresis, output OFF-delay, output test, display value selection, display colour selection, key protection, bank selection, display refresh period, maximum/minimum hold, reset	Scaling, measurement operation selection, output hysteresis, output OFF-delay, output test, teaching, display value selection, display colour selection, key protection, bank selection, display refresh period, maximum/minimum hold, reset	Scaling, measurement operation selection, averaging, previous average value comparison, output hysteresis, output OFF-delay, output test, teaching, display value selection, display colour selection, key protection, bank selection, display refresh period, maximum /minimum hold, reset
□	□	□	□	□	□
IP66	IP66	IP66	IP66	IP66	IP66
100 to 240 VAC or 24 VAC/VDC	100 to 240 VAC or 24 VAC/VDC	100 to 240 VAC or 24 VAC/VDC	100 to 240 VAC or 24 VAC/VDC	100 to 240 VAC or 24 VAC/VDC	100 to 240 VAC or 24 VAC/VDC
□	□	□	■	■	■
□	□	□	■	■	■
■	–	–	–	–	–
–	–	–	–	–	–
–	–	–	■	■	■
–	■	–	–	–	–
–	–	■	–	–	–
–	–	■	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
□	□	□	□	□	□
□	□	□	□	□	□
□	□	□	□	□	□
□	□	□	□	□	□
–	–	–	□	□	□
□	□	□	□	□	□
380			382		

■ Standard      □ Available      – No/not available



## Compact and intelligent digital panel meter

The K3GN is able to cover a wide variety of applications with its 3 main functions: process meter, RPM processor/tachometer and digital data display for PC/PLC. Configuration is easy and the design is advanced and compact.

- Process indicator DC voltage/current
- RPM process/tachometer
- Digital data display for PC/PLC
- Very compact 1/32 DIN housing: Size in mm (HxWxD): 24x48x83mm
- 5-digit display with programmable display colour, in red or green

### Ordering information

Input type	Supply voltage	Output	Order code	
			No communications	RS-485
DC voltage/current, NPN	24 VDC	Dual relays (SPST-NO)	K3GN-NDC 24 DC	K3GN-NDC-FLK 24 DC
		Three NPN open collector	K3GN-NDT1 24 DC	K3GN-NDT1-FLK 24 DC
DC voltage/current, PNP		Dual relays (SPST-NO)	K3GN-PDC 24 DC	K3GN-PDC-FLK 24 DC
		Three PNP open collector	K3GN-PDT2 24 DC	K3GN-PDT2-FLK 24 DC

### Specifications

<b>Supply voltage</b>	24 VDC
<b>Operating voltage range</b>	85 to 110% of the rated supply voltage
<b>Power consumption</b>	2.5 W max. (at max. DC load with all indicators lit)
<b>Ambient temperature</b>	Operating: -10 to 55°C (with no condensation or icing) Storage: -25 to 65°C (with no condensation or icing)
<b>Display refresh period</b>	Sampling period (sampling times multiplied by number of averaging times if average processing is selected)
<b>Max. displayed digits</b>	5 digits (-19999 to 99999)
<b>Display</b>	7-segment digital display, character height: 7.0 mm
<b>Polarity display</b>	"-" is displayed automatically with a negative input signal
<b>Zero display</b>	Leading zeros are not displayed
<b>Scaling function</b>	Programmable with front-panel key inputs (range of display: -19999 to 99999). The decimal point position can be set as desired.
<b>External controls</b>	HOLD: (measurement value held) ZERO: (forced-zero)
<b>Hysteresis setting</b>	Programmable with front-panel key inputs (0001 to 9999)
<b>Other functions</b>	Programmable colour display Selectable output operating action Teaching set values Average processing (simple average) Lockout configuration Communications writing control (communications output models only)
<b>Output</b>	Relays: 2 SPST-NO Transistors: 3 NPN open collector 3 PNP open collector  Combinations: Communications output (RS-485) + relay outputs Communications output (RS-485) + transistor outputs Communications output (RS-485) + transistor outputs (3 PNP open collector)
<b>Communications</b>	Communications function: RS-485
<b>Delay in comparative outputs (transistor outputs)</b>	750 ms max.
<b>Degree of protection</b>	Front-panel: NEMA4X for indoor use (equivalent to IP66) Rear case: IEC standard IP20 Terminals: IEC standard IP20
<b>Memory protection</b>	Non-volatile memory (EEPROM) (possible to rewrite 100,000 times)
<b>Size in mm (HxWxD)</b>	24x48x80



## Highly visible LCD display with 2-colour (red and green) LEDs

The K3MA series comes with a process meter, a frequency/rate meter and a temperature meter of either 100 to 240 VAC or 24 VAC/VDC. All are equipped with the same quality display and have the same short depth of 80 mm.

- 1/8 DIN size housing
- Highly visible, negative transmissive backlit LCD display
- 14.2 mm high characters
- 5 digits (-19,999 to 99,999), K3MA-L: 4 digits
- Front-panel IP66

### Ordering information

Indicator	Supply voltage	Input type & ranges	Output	Order code
Process meter	100 to 240 VAC	DC voltage: 0 to 5 V, 1 to 5 V, -5 to 5 V, -10 to 10 V DC current: 0 to 20 mA, 4 to 20 mA	2 relay contact outputs (SPST-NO)	K3MA-J-A2 100-240VAC
	24 VAC/VDC		2 relay contact outputs (SPST-NO)	K3MA-J-A2 24VAC/VDC
Temperature meter	100 to 240 VAC	Platinum-resistance thermometer: Pt100, JPt100 or thermocouple K, J, T, E, L, U, N, R, S, B	1 relay contact output (SPDT)	K3MA-L-C 100-240VAC
	24 VAC/VDC		1 relay contact output (SPDT)	K3MA-L-C 24VAC/VDC
Frequency/rate meter	100 to 240 VAC	Rotary pulse: No voltage: 0.05 to 30.00 Hz; open collector: 0.1 to 5000.0 Hz	2 relay contact outputs (SPST-NO)	K3MA-F-A2 100-240VAC
	24 VAC/VDC		2 relay contact outputs (SPST-NO)	K3MA-F-A2 24VAC/VDC

### Accessories

Type	Order code
Splash-proof soft cover	K32-49SC
Hard cover	K32-49HC

### Specifications

Item	100-240 VAC models	24 VAC/VDC models
Supply voltage	100 to 240 VAC	24 VAC (50/60 Hz), 24 VDC
Operating voltage range	85 to 110% of the rated supply voltage	
Power consumption (under maximum load)	6 VA max.	4.5 VA max. (24 VAC) 4.5 W max. (24 VDC)
Ambient temperature	Operating: -10 to 55°C (with no condensation or icing) Storage: -25 to 65°C (with no condensation or icing)	
Weight	Approx. 200 g	
Display	7-segment digital display, character height: 14.2 mm	
Polarity display	"-." is displayed automatically with a negative input signal	
Zero display	Leading zeros are not displayed	
Hold function	Max. hold (maximum value), min. hold (minimum value)	
Hysteresis setting	Programmable with front-panel key inputs (0001 to 9,999)	
Delay in comparative outputs	1 s max.	
Degree of protection	Front-panel: NEMA4X for indoor use (equivalent to IP66) Rear case: IEC standard IP20 Terminals: IEC standard IP00 + finger protection (VDE 0106/100)	
Memory protection	Non-volatile memory (EEPROM) (possible to rewrite 100,000 times)	
Size in mm (HxWxD)	48x96x80	



## Process, temperature, weighing and linear sensor indicators

These indicators with analog input feature a clear and easy-to-use colour change display. All models are equipped with an IP66 housing. K3HB series is high-speed, with a sample rate of 50 Hz, and even 2,000 Hz for K3HB-S

- Position meter indication for easy monitoring
- Optional DeviceNet, RS-232C, RS-485
- Double display, with 5 digits, in two colours
- 1/8 DIN size housing

### Ordering information

Type of indicator	Input sensor type and range	Supply voltage	Order code
Process indicator K3HB-X	AC current input, from 0.000 to 10.000 A, 0.0000 to 19.999 mA	100 to 240 VAC	K3HB-XAA 100-240VAC
		24 VAC/VDC	K3HB-XAA 24VAC/VDC
	DC current input, from ±199.99 mA, to 4.000 to 20.000 mA	100 to 240 VAC	K3HB-XAD 100-240VAC
		24 VAC/VDC	K3HB-XAD 24VAC/VDC
	AC voltage input, from 0.0 to 400.0 V to 0.0000 to 1.999 V	100 to 240 VAC	K3HB-XVA 100-240VAC
		24 VAC/VDC	K3HB-XVA 24VAC/VDC
	DC voltage input, from ±199.99 V to 1.0000 to 5.0000 V	100 to 240 VAC	K3HB-XVD 100-240VAC
		24 VAC/VDC	K3HB-XVD 24VAC/VDC
Temperature indicator K3HB-H	Temperature input Pt100, thermocouple K, J, T, E, L, U, N, R, S, B, W	100 to 240 VAC	K3HB-HTA 100-240VAC
		24 VAC/VDC	K3HB-HTA 24VAC/VDC
Weighing indicator K3HB-V	Load cell input (DC low voltage input), 0.00 to 199.99 mV, 0.000 to 19.999 mV, 100.00 mV, 199.999 mV	100 to 240 VAC	K3HB-VLC 100-240 VAC
		24 VAC/VDC	K3HB-VLC 24VAC/VDC
Linear sensor indicator K3HB-S	DC process input, 0 to 5 V, 1 to 5 V, -5 to 5 V, -10 to 10 V, 0 to 20 mA, 4 to 20 mA	24 VAC/VDC	K3HB-SSD AC/DC24
		100 to 240 VAC	K3HB-SSD AC100-240

### Option boards

#### Sensor power supply/output boards

Slot	Output	Sensor power supply	Communications	Applicable indicator types	Order code		
B	Relay	PASS: SPDT	12 VDC ±10%, 80 mA	–	K3HB-X, -H, -S	K33-CPA <sup>*1</sup>	
	Linear current	DC0(4) - 20 mA		–	K3HB-X, -H, -S	K33-L1 A <sup>*2</sup>	
	Linear voltage	DC0(1) - 5 V, 0 to 10 V		–	K3HB-X, -H, -S	K33-L2A <sup>*2</sup>	
	–	–		–	K3HB-X, -H, -S	K33-A <sup>*2</sup>	
	–	–		–	RS-232C	K3HB-X, -H, -S	K33-FLK1 A <sup>*2</sup>
	–	–		–	RS-485	K3HB-X, -H, -S	K33-FLK3A <sup>*2</sup>
	Relay	PASS: SPDT		10 VDC ±5%, 100 mA	–	K3HB-V	K33-CPB <sup>*1</sup>
	Linear current	DC0(4) - 20 mA			–	K3HB-V	K33-L1B <sup>*2</sup>
	Linear voltage	DC0(1) - 5 V, 0 to 10 V			–	K3HB-V	K33-L2B <sup>*2</sup>
	–	–			–	K3HB-V	K33-B <sup>*2</sup>
–	–	–	RS-232C		K3HB-V	K33-FLK1B <sup>*2</sup>	
–	–	–	RS-485		K3HB-V	K33-FLK3B <sup>*2</sup>	

#### Relay/transistor output boards

Slot	Output	Communications	Order code	
C	Relay	H/L: SPDT each	–	K34-C1
		HH/H/LL/L: SPST-NO each	–	K34-C2
	Transistor	NPN open collector: HH/H/PASS/L/LL	–	K34-T1
		PNP open collector: HH/H/PASS/L/LL	–	K34-T2
	–	–	DeviceNet	K34-DRT <sup>*2</sup>

#### Event input boards

Slot	Input type	Number of points	Communications	Order code
D	NPN open collector	5	M3 terminal blocks	K35-1
		8	10-pin MIL connector	K35-2
	PNP open collector	5	M3 terminal blocks	K35-3
		8	10-pin MIL connector	K35-4

<sup>\*1</sup> CPA/CPB can be combined with relay outputs only.

<sup>\*2</sup> Only one of the following can be used by each digital indicator: RS-232C/RS-485 communications, a linear output, or DeviceNet communications. K3HB has got three slots for option boards: Slot B, slot C and slot D.

### Accessories

Type	Order code
Special cable (for event inputs with 8-pin connector)	K32-DICN

## Specifications

<b>Power supply voltage</b>		100 to 240 VAC (50/60 Hz), 24 VAC/VDC, DeviceNet power supply: 24 VDC		
<b>Allowable power supply voltage range</b>		85 to 110% of the rated power supply voltage, DeviceNet power supply: 11 to 25 VDC		
<b>Power consumption</b>		100 to 240 V: 18 VA max. (max. load), 24 VAC/DC: 11 VA/7 W max. (max. load)		
<b>Display method</b>		Negative LCD (backlit LED) display 7-segment digital display (character height: PV: 14.2 mm (green/red); SV: 4.9 mm (green))		
<b>Ambient operating temperature</b>		-10 to 55°C (with no icing or condensation)		
<b>Display range</b>		-19,999 to 99,999		
<b>Weight</b>		Approx. 300 g (base unit only)		
<b>Degree of protection</b>	Front-panel	Conforms to NEMA 4X for indoor use (equivalent to IP66)		
	Rear case	IP20		
	Terminals	IP00 + finger protection (VDE0106/100)		
<b>Memory protection</b>		EEPROM (non-volatile memory), number of rewrites: 100,000		
<b>Event input ratings</b>	Contact	ON: 1 k $\Omega$ max., OFF: 100 k $\Omega$ min.		
	No-contact	ON residual voltage: 2 V max., OFF leakage current: 0.1 mA max., load current: 4 mA max. Maximum applied voltage: 30 VDC max.		
<b>Output ratings</b>	<b>Transistor output</b>	Maximum load voltage	24 VDC	
		Maximum load current	50 mA	
		Leakage current	100 $\mu$ A max.	
	<b>Contact output (resistive load)</b>	Rated load	5 A at 250 VAC, 5 A at 30 VDC	
		Rated through current	5 A	
		Mechanical life expectancy	5,000,000 operations	
		Electrical life expectancy	100,000 operations	
	<b>Linear output</b>	Allowable load impedance	500 $\Omega$ max. (mA); 5 k $\Omega$ min. (V)	
		Resolution	Approx. 10,000	
Output error		$\pm$ 0.5% FS		
<b>Size in mm (HxWxD)</b>		48x96x100		



## Rotary pulse, timer interval and up-/down-counting pulse indicators

These indicators with analog input feature a clear and easy-to-use colour change display. All models are equipped with an IP66 housing. K3HB-R and -C are high-speed, with a sample rate up to 50 kHz.

- Position meter indication for easy monitoring
- Optional DeviceNet, RS-232C, RS-485
- Double display, with 5 digits, in two colours
- 1/8 DIN size housing

### Ordering information

Type of indicator	Input ranges	Supply voltage	Input sensor	Order code
Rotary pulse indicator K3HB-R	No voltage contact: 30 Hz max. Voltage pulse: 50 kHz max. Open collector: 50 kHz max.	100 to 240 VAC	NPN input/voltage pulse	K3HB-RNB 100-240VAC
		24 VAC/VDC		K3HB-RNB 24VAC/VDC
		100 to 240 VAC	PNP input	K3HB-RPB 100-240VAC
		24 VAC/VDC		K3HB-RPB 24VAC/VDC
		100 to 240 VAC	NPN	K3HB-PNB 100-240VAC
		100 to 240 VAC	PNP	K3HB-PPB 100-240VAC
Timer interval indicator K3HB-P	24 VAC/VDC	PNP	K3HB-PPB 24VAC/VDC	
Up/down counting pulse indicator K3HB-C	100 to 240 VAC	NPN	K3HB-CNB 100-240VAC	
	24 VAC/VDC	NPN	K3HB-CNB 24VAC/VDC	
	24 VAC/VDC	PNP	K3HB-CPB 24VAC/VDC	

### Option boards

#### Sensor power supply/output boards

Slot	Output	Sensor power supply	Communications	Order code	
B	Relay	PASS: SPDT	12 VDC ±10%, 80 mA	K33-CPA <sup>*1</sup>	
	Linear current	DC0(4) - 20 mA		K33-L1 A <sup>*2</sup>	
	Linear voltage	DC0(1) - 5 V, 0 to 10 V		K33-L2A <sup>*2</sup>	
	-	-		K33-A <sup>*2</sup>	
	-	-		RS-232C	K33-FLK1 A <sup>*2</sup>
	-	-		RS-485	K33-FLK3A <sup>*2</sup>
	-	-		-	-

#### Relay/transistor output boards

Slot	Output	Communications	Order code
C	Relay	H/L: SPDT each	K34-C1
		HH/H/LL/L: SPST-NO each	K34-C2
	Transistor	NPN open collector: HH/H/PASS/L/LL	K34-T1
		PNP open collector: HH/H/PASS/L/LL	K34-T2
	-	DeviceNet	K34-DRT <sup>*2</sup>
	BCD + transistor	NPN open collector: HH/H/PASS/L/LL	K34-BCD

#### Event input boards

Slot	Input type	Number of points	Communications	Order code
D	NPN open collector	5	M3 terminal blocks	K35-1
		8	10-pin MIL connector	K35-2
	PNP open collector	5	M3 terminal blocks	K35-3
		8	10-pin MIL connector	K35-4

<sup>\*1</sup> CPA can be combined with relay outputs only.

<sup>\*2</sup> Only one of the following can be used by each digital indicator: RS-232C/RS-485 communications, a linear output, or DeviceNet communications.  
K3HB has got three slots for option boards: Slot B, slot C and slot D.

### Accessories

Type	Order code
Special cable (for event inputs with 8-pin connector)	K32-DICN
Special BCD output cable	K32-BCD

## Specifications

<b>Power supply voltage</b>		100 to 240 VAC (50/60 Hz), 24 VAC/VDC, DeviceNet power supply: 24 VDC	
<b>Allowable power supply voltage range</b>		85 to 110% of the rated power supply voltage, DeviceNet power supply: 11 to 25 VDC	
<b>Power consumption</b>		100 to 240 V: 18 VA max. (max. load), 24 VAC/DC: 11 VA/7 W max. (max. load)	
<b>Display method</b>		Negative LCD (backlit LED) display 7-segment digital display (character height: PV: 14.2 mm (green/red); SV: 4.9 mm (green))	
<b>Ambient operating temperature</b>		-10 to 55°C (with no icing or condensation)	
<b>Display range</b>		-19,999 to 99,999	
<b>Weight</b>		Approx. 300 g (base unit only)	
<b>Degree of protection</b>		Front-panel	Conforms to NEMA 4X for indoor use (equivalent to IP66)
		Rear case	IP20
		Terminals	IP00 + finger protection (VDE0106/100)
<b>Memory protection</b>		EEPROM (non-volatile memory), number of rewrites: 100,000	
<b>Event input ratings</b>		Contact	ON: 1 k $\Omega$ max., OFF: 100 k $\Omega$ min.
		No-contact	ON residual voltage: 2 V max., OFF leakage current: 0.1 mA max., load current: 4 mA max. Maximum applied voltage: 30 VDC max.
<b>Output ratings</b>	<b>Transistor output</b>	Maximum load voltage	24 VDC
		Maximum load current	50 mA
		Leakage current	100 $\mu$ A max.
	<b>Contact output (resistive load)</b>	Rated load	5 A at 250 VAC, 5 A at 30 VDC
		Rated through current	5 A
		Mechanical life expectancy	5,000,000 operations
		Electrical life expectancy	100,000 operations
	<b>Linear output</b>	Allowable load impedance	500 $\Omega$ max. (mA); 5 k $\Omega$ min. (V)
		Resolution	Approx. 10,000
Output error		$\pm$ 0.5% FS	
<b>Size in mm (HxWxD)</b>		48x96x100	